



Projecting a bright and accurate rendition of graphic designs, logos and patterns in outdoor and indoor locations with the help of a dichroic or metal gobo, the versatile image projector GOBOLED 80 D, fitted with a single powerful LED, provides maximum creativity, dynamism and flexibility for the most demanding design and application requirements.



TECHNICAL SPECIFICATIONS

1 high brightness 80W power LED unit
Manual adjustment of focus and linear zoom (20°÷32°)
Linear 0-100% dimmer function
Strobe function (25 FPS max)
Electronic blackout
One rotating gobo slot hosts either metal or glass gobos (ø ext. 53.3 - ø int. 40 mm)
One dichroic filter can also be used in combination with a metal gobo
DMX, automatic and Master-Slave mode
Power supply:
100÷240V / 50-60Hz

Power consumption:
100W max
Electrical class: I
Meets CE and CSA safety standards
Aluminium body with an adjustable mounting yoke
Projector: IP65
Cooling system: IP55
Operating temperature:
-20°C to 40°C (-4°F to 104°F)
8.7 Kg

DIGITAL CONTROL SYSTEM SPECIFICATIONS AND CONFIGURATIONS AVAILABLE ON OUR WEBSITE



GOBOLED 80D

IMAGE PROJECTION

CODES

AL2502 GOBOLED 80 D

NOTES

On request, GoboLED 80D is available also in the CSA certified version.

ACCESSORIES




GR0250 SAFETY CABLE

PRODUCT FEATURES



BEAM ANGLE REFERENCE

PROJECTION ANGLE 20° ÷ 32°

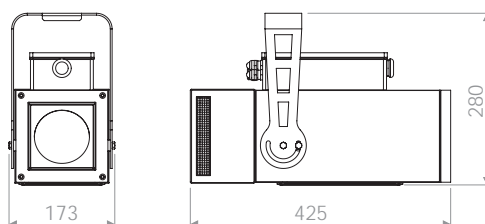

PHOTOMETRIC DETAILS AVAILABLE ON OUR WEBSITE








IMAGE PROJECTION



 GRIVEN