



QUARA

Aluminium or AISI 316L stainless steel body.

648

**Quara
family**

Quara_R



347-348

Quara_Q



347-348

HIGH DEFINITION LIGHTING

The new circular aperture creating a light beam with extremely well-defined edges complements and completes the Quara series. The perfect shaping of the light on the ground creates striking graphic effects. Thanks to the IP65 protection rating and dedicated finishes, it is the ideal step light for contemporary outdoor settings. Quara RO is available in three diameters: Ø25, Ø40 and Ø70 mm and three colours: White, Grey, Dark and Brown.



White (WH)



Grey (GG)




Dark Brown (DB)

COMPACT, COMFORTABLE, SPECTACULAR

A drop of light in a square or round lamp body: Quara, a marker light with an IP65 protection rating which, when installed close to the floor, illuminates and decorates in a classy and tasteful manner thanks to its asymmetrical optics. Available versions (ID) with the power supply integrated to the luminaire body, so it is possible to connect Quara directly to the power line.




Quara_RO | powerLED | 220 mA | 0,7 W DC

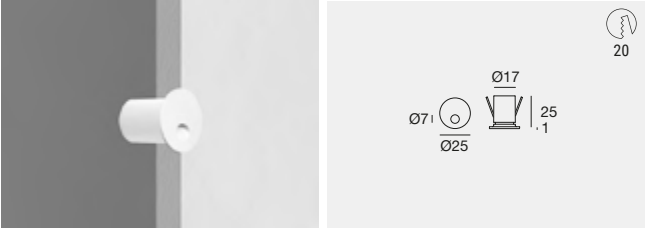

	Cct	Im S - Im D	Opt
WH 77395	A	88 - On req	70 (Asym. Ww)
GG 77396	M	94 - On req	
DB 77397	W	101 - On req	
	N	107 - On req	

Electronics: **BA** (pag 652) | Recessed casings: (pag 653)


Quara_RO | powerLED | 350 mA | 1 W DC

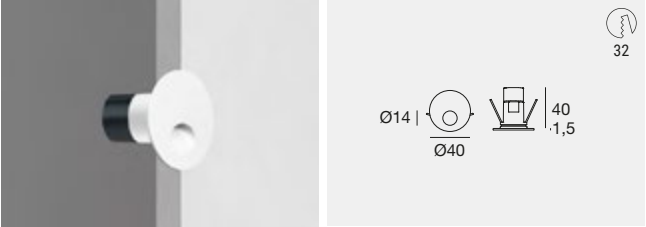

	Cct	Im S - Im D	Opt
WH 77391	A	111 - 26	70 (Asym. Ww)
GG 77392	M	145 - 34	
DB 77393	W	154 - 36	
	N	165 - 38	


Electronics: **BB** (pag 652) | Recessed casings: (pag 653)

Quara_RO | powerLED | 350 mA | 1 W DC

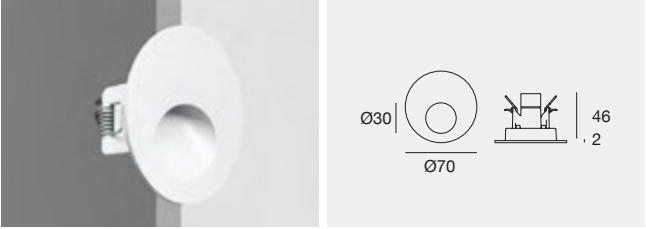

	Cct	Im S - Im D	Opt
WH 76745	A	111 - 37	70 (Asym. Ww)
GG 76746	M	145 - 48	
DB 76747	W	154 - 51	
	N	165 - 55	

Electronics: **BB** (pag 652) | Recessed casings: (pag 653)

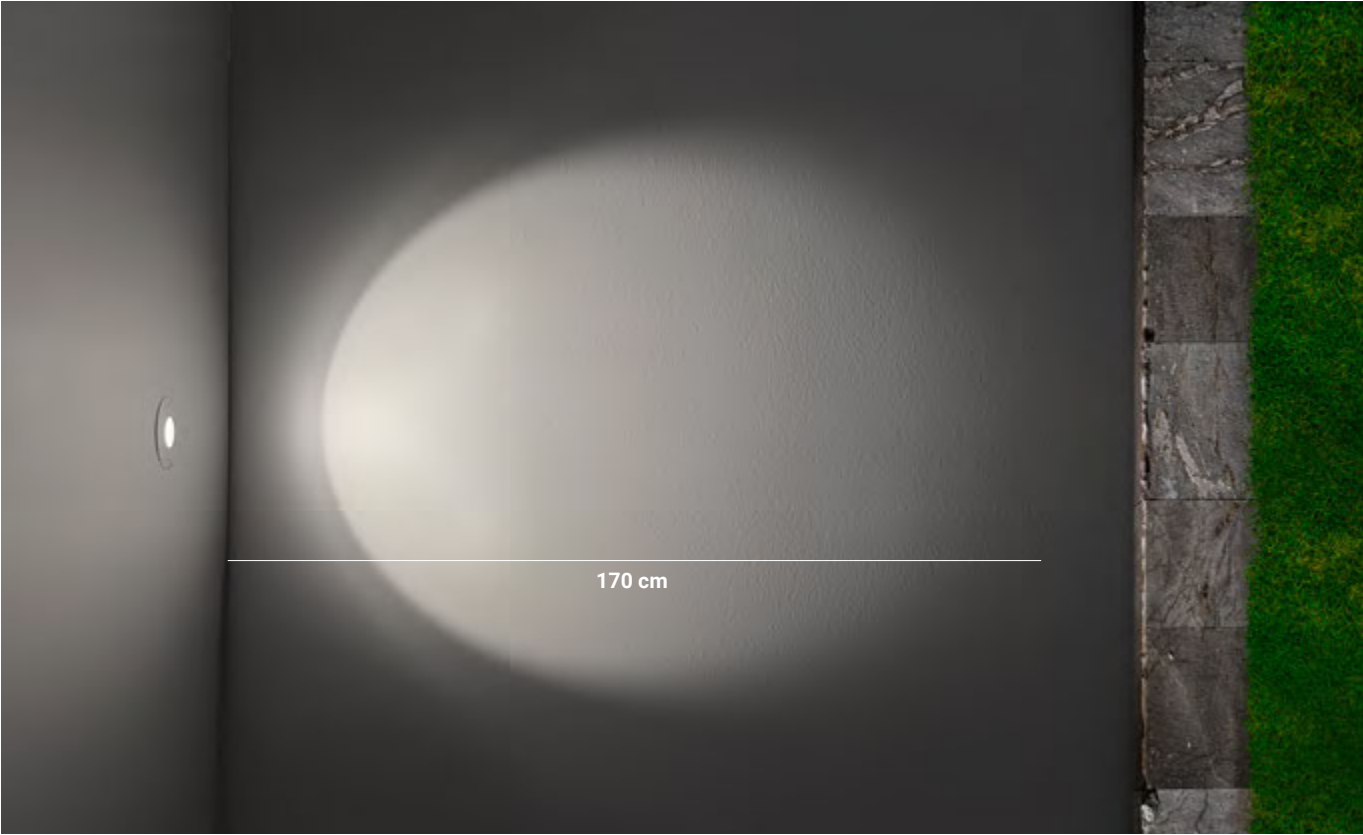

Quara_RO 1 W DC - 3000K (76745) Assembly height: 40 cm

Step lights

650

Finishes

WH White	DB Dark Brown
GG Grey	

Cct

A 2200	W 3000
M 2700	N 4000


Quara_R | powerLED | 350 mA | 1 W DC



	Fin	Cct	Im S - Im D	Opt
C00236	WH	M	98 - 10	WW (Asym. Ww)
	GG	W	106 - 11	
	DB	N	112 - 12	
	IS			

Electronics: **BB** (pag 652) | Recessed casings: (pag 653)

Quara_R | powerLED

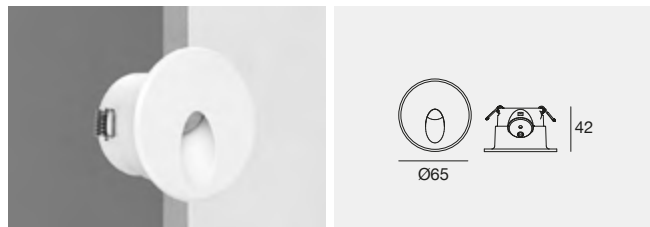

ID

	Cct	Im S - Im D	Opt
220-240 V AC - 2 W DC - 2,7 W AC			
WH 83579	A	176 - 89	70 (Asym. Ww)
GG 83580	M	233 - 117	
DB 83581	W	249 - 119	
	N	266 - 125	

Accessories: (pag 653)




	Cct	Im S - Im D	Opt
630 mA - 2 W DC			
WH 85543	A	176 - 89	70 (Asym. Ww)
GG 85542	M	233 - 117	
DB 87988	W	249 - 119	
	N	266 - 125	

Electronics: **BD** (pag 652) | Recessed casings: (pag 653)



Quara_R | powerLED | 24 V DC | 1,5 W DC

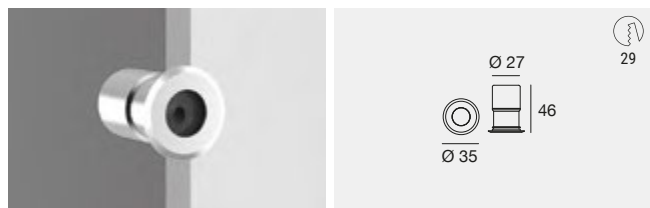

	Cct	Im S - Im D	Opt
IS 84075	M	188 - On req	07 (Asym. Ww)
DB 84076	W	199 - On req	
BS 84077	N	213 - On req	

Electronics: **DI** (pag 652) | Recessed casings: (pag 653)



Quara_RI | powerLED | 630 mA | 2 W DC




	Cct	Im S - Im D	Opt
IS 92671	A	176 - 63	70 (Asym. Ww)
	M	233 - 80	
	W	249 - 85	
	N	266 - 91	

Electronics: **BD** (pag 652) | Recessed casings: (pag 653)



Quara_F | powerLED | 350 mA | 1 W DC

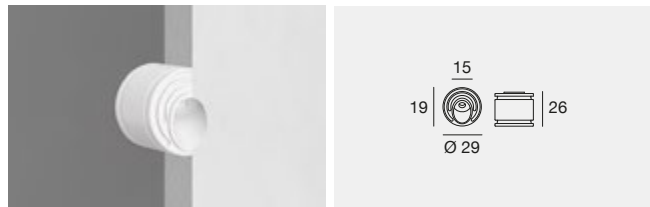


	Cct	Im S - Im D	Opt
WH 84078	M	98 - 36	70 (Asym. Ww)
	W	106 - 38	
	N	112 - 41	

Electronics: **BB** (pag 652) | Recessed casings: (pag 653)



Quara_F | powerLED | 350 mA | 1 W DC

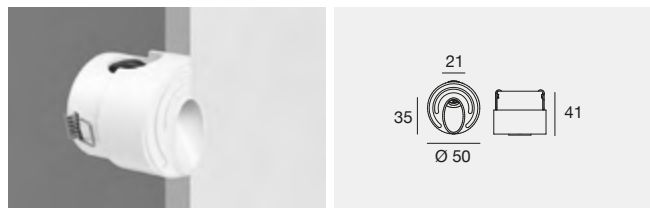

	Cct	Im S - Im D	Opt
WH 86460	M	136 - 67	70 (Asym. Ww)
	W	145 - 71	
	N	155 - 76	

Electronics: **BB** (pag 652) | Recessed casings: (pag 653)

Finishes


Cct

WH White	DB Dark Brown	BS Brass	A 2200	W 3000
GG Grey	IS Steel		M 2700	N 4000


Step lights

651


Quara_Q | powerLED




Quara_Q | powerLED



Quara_QI | powerLED



Quara_QI | powerLED



Electronics

BA

99307 ON/OFF (IP20) 1 - 2 art. 138 x 22 x h 20 29	83007 ON/OFF (IP20) 3 - 6 art. 138 x 22 x h 20 29	99342 ON/OFF 6 - 12 art. 80 x 100 x h 31	83154 DALI 5 - 14 art. 54 x 121 x h 26 60
--	--	--	--

BD

89420 ON/OFF 1 - 2 art. 74 x 65 x h 27	C-E200008 ON/OFF 3 - 6 art. 135 x 26 x h 26 35	99186 ON/OFF 6 - 12 art. 117 x 92 x h 38	C-E200002 DALI/PUSH 5 - 12 art. 125 x 45 x h 30 55
--	---	--	---



Fin	Cct	Im S - Im D	Opt
350 mA - 1 W DC			
C00237	WH	M 98 - On req	WW (Asym. Ww)
	GG	W 106 - On req	
	DB	N 112 - On req	
	IS		

Electronics: **BB** (pag 652) | Recessed casings: (pag 653)



ID

Cct	Im S - Im D	Opt
220-240 V AC - 2 W DC - 2,7 W AC		
WH 83583	A 176 - 83	70 (Asym. Ww)
GG 83584	M 233 - 110	
DB 83585	W 249 - 117	
	N 266 - 126	

Accessories: (pag 653)



Cct	Im S - Im D	Opt
630 mA - 2 W DC		
WH 86563	A 176 - 83	70 (Asym. Ww)
GG 86562	M 233 - 110	
DB 87989	W 249 - 117	
	N 266 - 126	

Electronics: **BD** (pag 652) | Recessed casings: (pag 653)



Cct	Im S - Im D	Opt
630 mA - 2 W DC		
IS 92672	A 176 - 61	70 (Asym. Ww)
	M 233 - 80	
	W 249 - 85	
	N 266 - 91	

Electronics: **BD** (pag 652) | Recessed casings: (pag 653)



Cct	Im S - Im D	Opt
220-240 V AC - 4 W DC - 4,8 W AC		
WH 92238	A 352 - 189	70 (Asym. Ww)
GG 92239	M 438 - 252	
DB 92240	W 466 - 268	
	N 498 - 286	

Accessories: (pag 653)

BB

89419 ON/OFF 1 - 2 art. 74 x 65 x h 27	89421 ON/OFF 3 - 6 art. 74 x 65 x h 27	C-E200006 ON/OFF 6 - 12 art. 135 x 26 x h 26 35	C-E200004 DALI/PUSH 5 - 12 art. 125 x 45 x h 30 55
--	--	--	---

DI

89488 ON/OFF 1 - 9 art. 80 x 100 x h 31	89179 ON/OFF 1 - 15 art. 92 x 117 x h 38	89359 ON/OFF 1 - 30 art. 115 x 140 x h 50	99660 Dimmer DALI - 0/1-10V 149 x 37 x h 31 48	83042 Dimmer DALI/PUSH 0/1-10V 164 x 38 x h 25 45	+ driver 24V DC 99331 150W 1-70 art. 70 99786 240W 1-112 art. 81
---	--	---	---	--	---


Step lights

652

Finishes

WH White	DB Dark Brown	A 2200	W 3000
GG Grey	IS Steel	M 2700	N 4000


Recessed casings



ABS 98950

Recessed casings


suitable for: Quara_RO Ø25 mm, Quara_R Ø25 mm
Quara_Q L25 mm



ABS 84915

Recessed casings


suitable for: Quara_RO Ø40 mm



ABS 84338

Recessed casings


suitable for: Quara_RO Ø70, Quara_R Ø65, Quara_Q L70
Quara_RI Ø70, Quara_QI L70, Quara_F Ø50 mm



ABS 83155

Recessed casings


suitable for: Quara_F Ø29 mm



ABS 84918

Recessed casings

suitable for: Quara_R Ø35 mm



ABS 98050

Recessed casings

suitable for: Quara_QI L126x121 mm

