





GUARDIAN

Aluminium body.
Anodised aluminium flange.



Guardian | powerLED | 220-240 V AC | 7,2 W DC - 8,5 W AC




	Cct	Im S - Im D	Opt
WH 81893	M	1041 - 568	15 (17°)
BB 81916	W	1087 - 592	30 (26°)
GG 81838	N	1114 - 613	60 (51°)
			07 (Asym. Ww)

WH 81894	HC	M	1041 - 453	15 (14°)
BB 81917	HC	W	1087 - 473	30 (24°)
GG 81839	HC	N	1114 - 489	60 (42°)

Recessed casings: (pag 453)

Guardian_J | powerLED | 220-240 V AC | 7,2 W DC - 8,5 W AC



	Cct	Im S - Im D	Opt
WH 81895	M	1041 - 558	20 (20°)
BB 81918	W	1087 - 565	30 (30°)
GG 81840	N	1114 - 572	60 (60°)

Recessed casings: (pag 453)



White (WH)




Gray (GG)



Black (BB)

Guardian_J (7,2 W)

Which can be easily adjusted using a slotted screwdriver on the relevant screw, the optic group can be angled from -20°/+20°.

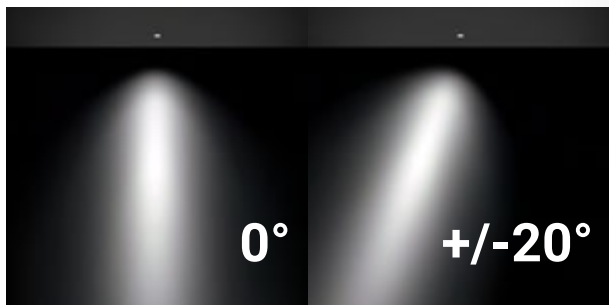

Finishes	Cct	Accessories
WH White	M 2700	HC Honeycomb
GG Grey	N 4000	
BB Black	W 3000	

Downlights

PADOVA CONGRESS

Padua (Italy)


Project: Architect Kengo Kuma

Lighting Designer:
Cogevi

Photography:
TheStudio





Guardian | powerLED | 220-240 V AC | 13 W DC - 15 W AC

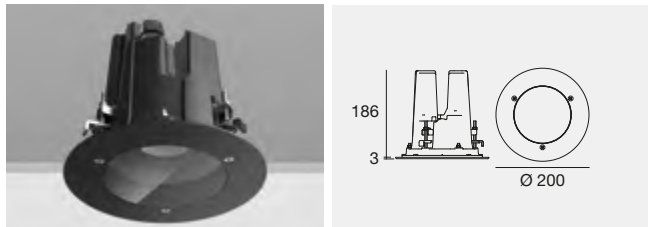

		Cct	lm S - lm D	Opt	
WH 76778		M	1676 - 1325	10 (10°)	
BB 76808		W	1750 - 1380		
GG 76838		N	1794 - 1421		
DALI					
WH 76787					
BB 76817					
GG 76847					
WH 76779	HC	M	1676 - 1054	10 (10°)	HONEYCOMB
BB 76809	HC	W	1750 - 1098		
GG 76839	HC	N	1794 - 1131		
DALI					
WH 76788	HC				
BB 76818	HC				
GG 76848	HC				

Recessed casings: (pag 453)

Guardian_J | powerLED | 220-240 V AC | 13 W DC - 15 W AC

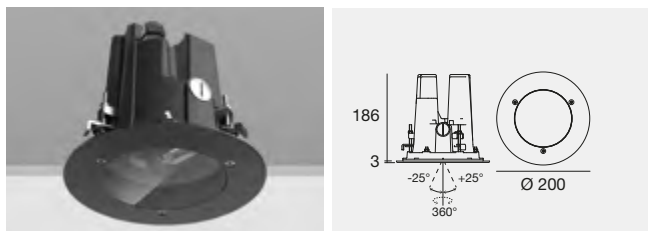


		Cct	lm S - lm D	Opt	
WH 76794		M	1676 - 1289	10 (10°)	
BB 76824		W	1750 - 1344		
GG 76854		N	1794 - 1383		
DALI					
WH 76800					
BB 76830					
GG 76860					
WH 76795	HC	M	1676 - 1098	10 (10°)	HONEYCOMB
BB 76825	HC	W	1750 - 1144		
GG 76855	HC	N	1794 - 1178		
DALI					
WH 76801	HC				
BB 76831	HC				
GG 76861	HC				

Recessed casings: (pag 453)

Guardian_J (13 W)


Which can be easily adjusted using a slotted screwdriver on the relevant screw, the optic group can be angled from -25°/+25°.

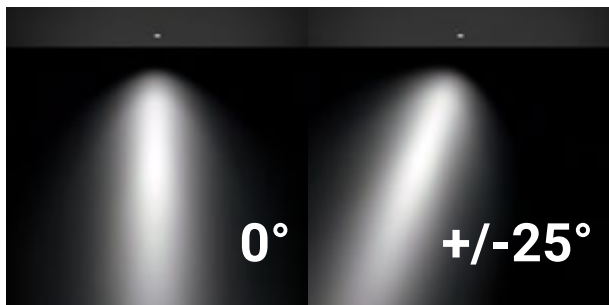

Finishes	Cct	Accessories
WH White	M 2700 W 3000	N 4000 HC Honeycomb
BB Black		
GG Grey		

Downlights

Guardian | powerLED | 220-240 V AC | 16 W DC - 18 W AC


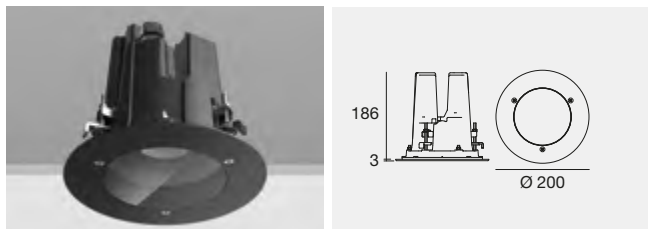


			Cct	lm S - lm D	Opt	
WH	76775		M	2528 - 1718	15	(16°)
BB	76805		W	2634 - 1790	30	(37°)
GG	76835		N	2704 - 1671	50	(53°)
DALI						
WH	76784					
BB	76814					
GG	76844					
WH	76776	HC	M	2528 - 1275	15	(15°)
BB	76806	HC	W	2634 - 1321	30	(33°)
GG	76836	HC	N	2704 - 1368	50	(46°)
DALI						
WH	76785	HC				
BB	76815	HC				
GG	76845	HC				

HONEYCOMB

Recessed casings: (pag 453)

Guardian_J | powerLED | 220-240 V AC | 16 W DC - 18 W AC

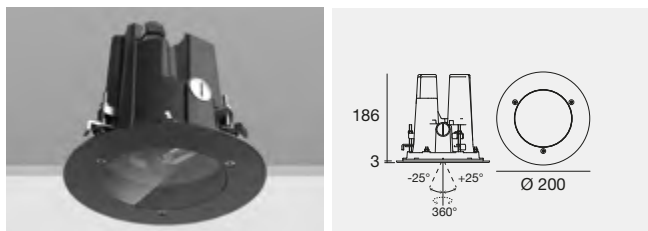


			Cct	lm S - lm D	Opt	
WH	76792		M	2528 - 1633	15	(16°)
BB	76822		W	2634 - 1702	30	(37°)
GG	76852		N	2704 - 1753	50	(52°)
DALI						
WH	76798					
BB	76828					
GG	76858					
WH	76793	HC	M	2528 - 1162	15	(15°)
BB	76823	HC	W	2634 - 1210	30	(32°)
GG	76853	HC	N	2704 - 1246	50	(45°)
DALI						
WH	76799	HC				
BB	76829	HC				
GG	76859	HC				

HONEYCOMB

Recessed casings: (pag 453)

Guardian_J (16 W / 19 W)

Which can be easily adjusted using a slotted screwdriver on the relevant screw, the optic group can be angled from -25°/+25°.

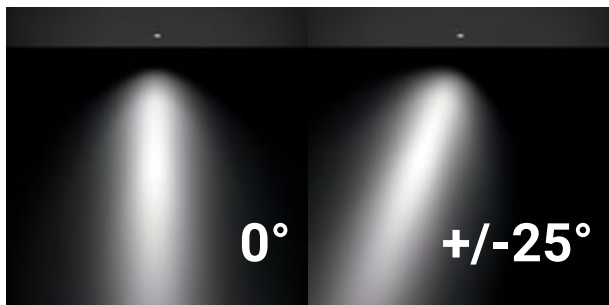

Downlights

452

Finishes

WH White
BB Black


Cct

M 2700
W 3000

Accessories

N 4000 HC Honeycomb



Guardian | powerLED | 220-240 V AC | 19 W DC - 22 W AC

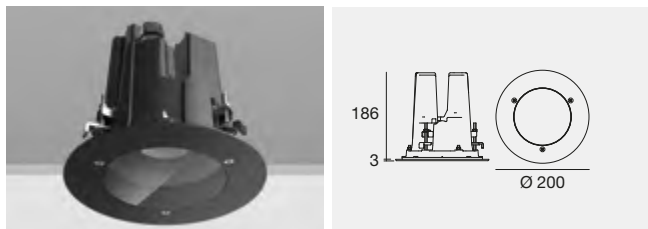

		Cct	lm S - lm D	Opt	
WH	76772	M	2773 - On req	15	(16°)
BB	76802	W	2889 - On req	30	(37°)
GG	76832	N	2966 - On req	50	(53°)
DALI					
WH	76781				
BB	76811				
GG	76841				
WH	76773	HC	M 2773 - On req	15	(15°)
BB	76803	HC	W 2889 - On req	30	(33°)
GG	76833	HC	N 2966 - On req	50	(46°)
DALI					
WH	76782	HC			
BB	76812	HC			
GG	76842	HC			

Recessed casings: (pag 453)

Guardian_J | powerLED | 220-240 V AC | 19 W DC - 22 W AC

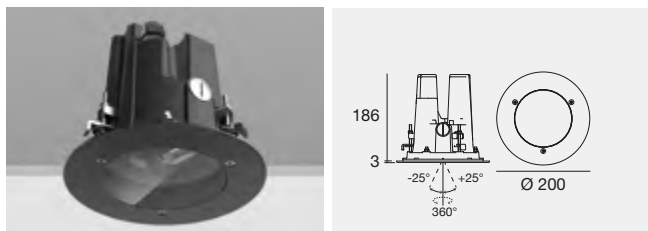

		Cct	lm S - lm D	Opt	
WH	76790	M	2773 - On req	15	(16°)
BB	76820	W	2889 - On req	30	(37°)
GG	76850	N	2966 - On req	50	(52°)
DALI					
WH	76796				
BB	76826				
GG	76856				
WH	76791	HC	M 2773 - On req	15	(15°)
BB	76821	HC	W 2889 - On req	30	(32°)
GG	76851	HC	N 2966 - On req	50	(45°)
DALI					
WH	76797	HC			
BB	76827	HC			
GG	76857	HC			

Recessed casings: (pag 453)

Recessed casings

ABS 99673 Recessed casing for brick or concrete-mounted installation

suitable for: Guardian Ø110 7,2W
Guardian_J Ø110 7,2W

ABS 83328 Recessed casing for brick or concrete-mounted installation

suitable for: Guardian Ø200 13W - 16W - 19W
Guardian_J Ø200 13W - 16W - 19W

POL 83331 Template for cementing in polystyrene foam

suitable for: Guardian Ø200 13W - 16W - 19W
Guardian_J Ø200 13W - 16W - 19W

ZN 83330 Case back for outer casing closure 83328

suitable for: Guardian Ø200 13W - 16W - 19W
Guardian_J Ø200 13W - 16W - 19W

Finishes

WH	White	GG	Grey	POL	Polystyrene
BB	Black	ZN	Galvanised Steel		

Cct

M	2700	N	4000
W	3000		

Accessories

HC Honeycomb

Downlights