

ryo


Materials

Polyester powder-coated aluminium body
and protective surface treatment
Transparent polycarbonate diffuser





ryo range

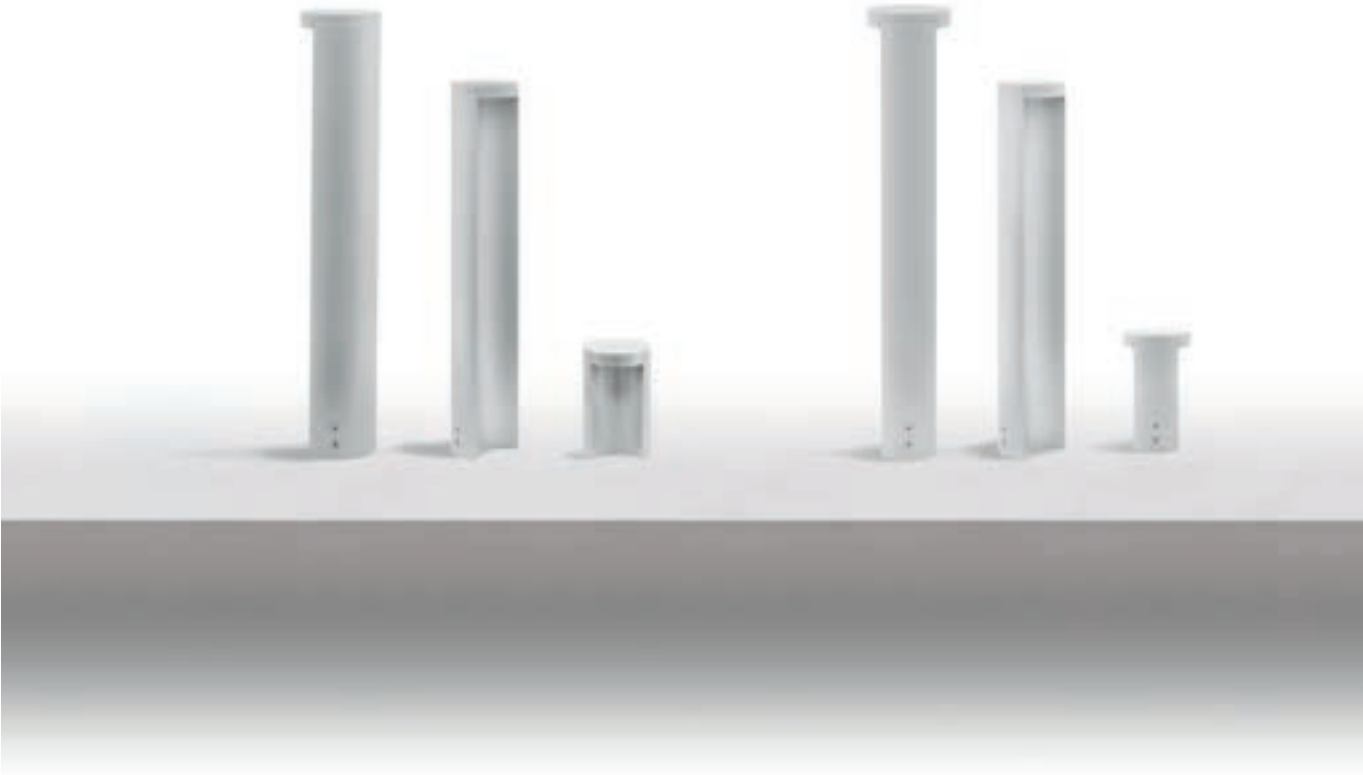

Ryo




4,2 W	250 x Ø150 mm
8,4 W	250 x Ø150 mm
9 W	820 x Ø150 mm 1120 x Ø150 mm
18 W	820 x Ø150 mm 1120 x Ø150 mm
Finish	GreyBK GreyDarkBrown
arrayLED	2700 3000
Optics	General
Driver	On/Off

ryo lighting concept

Concept



The Ryo name indicates its peculiar character: during the night the stem's concave profile comes alive and flooded by decorative and functional light. The vertical plan lighting provides a reference point during the night, using coating surface fixture's luminance to reduce consumptions. Light distribution on path results smooth and deep, perfect for public and residential projects.

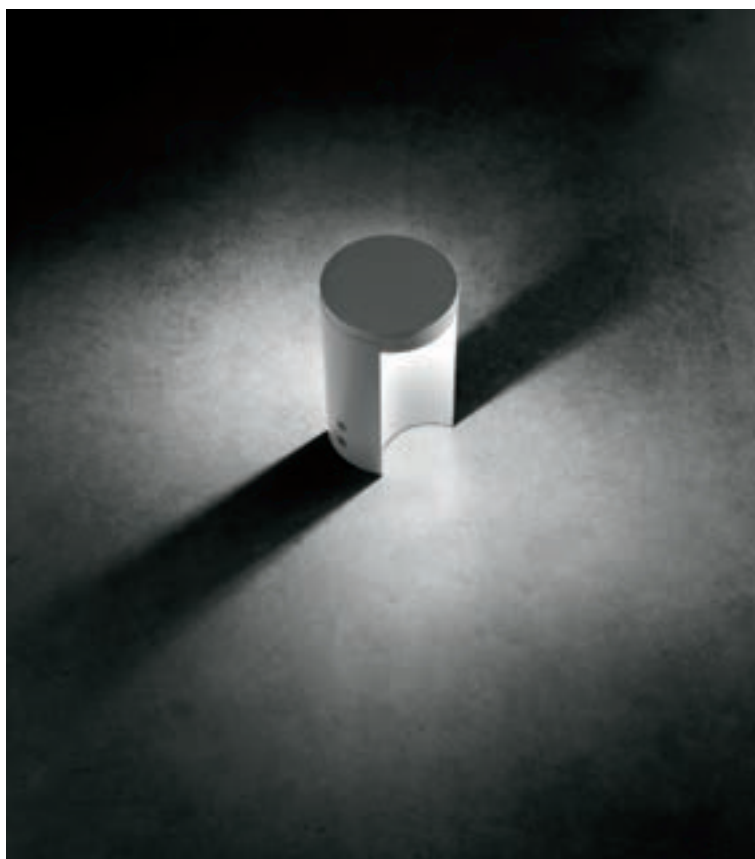

Unidirectional emission

Ideal for pathway lighting, this solution provides a great visual orientation and creates a certain rhythm inside the pathways, also outlining the walking areas through light and shade.


64736N00

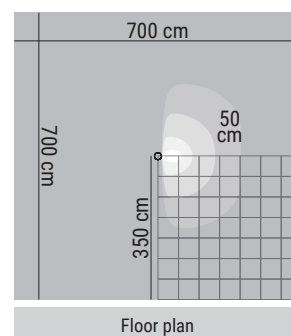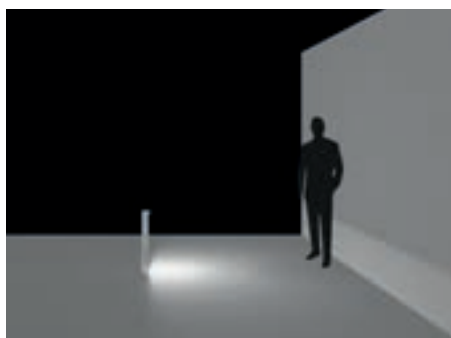


Bidirectional emission

This type of emission is particularly functional to light up large areas or gardens, since they require a diffusive light coming from both sides of the bollard.

64735W00

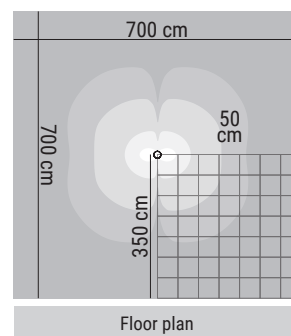

Ryo | Bollards | 198-264 V AC | arrayLED 4,2 W DC - 5,2 W AC




		Cct	lm S - D	Optic
Grey	64761	M 2700	728 - 517	00 General (17°)
BK Grey	64759	W 3000	778 - 535	
DarkBrown	64760			

Accessories Pag. 651

RTG 64761W00 / 64760W00

Ryo | Bollards | 100-240 V AC | arrayLED 9 W DC - 10 W AC




		Cct	lm S - D	Optic
Grey	64734	M 2700	1208 - 1019	00 General (17°)
BK Grey	64721	W 3000	1294 - 1054	
DarkBrown	64726			

Accessories Pag. 651

RTG 64734W00 / 64726W00


Ryo | Bollards | 100-240 V AC | arrayLED 9 W DC - 10 W AC



		Cct	lm S - D	Optic
Grey	64736	M 2700	1208 - 1019	00 General (17°)
BK Grey	64723	W 3000	1294 - 1054	
DarkBrown	64728			

Accessories Pag. 651



Ryo | Bollards | 100-240 V AC | arrayLED 8,4 W DC - 10 W AC



		Cct	lm S - D	Optic
Grey	64764	M 2700	1456 - 1034	00 General (46°)
BK Grey	64762	W 3000	1556 - 1070	
DarkBrown	64763			

Accessories Pag. 651



Ryo | Bollards | 176-240 V AC | arrayLED 18 W DC - 20 W AC



		Cct	lm S - D	Optic
Grey	64735	M 2700	2416 - 2038	00 General (46°)
BK Grey	64722	W 3000	2588 - 2108	
DarkBrown	64727			

Accessories Pag. 651


Ryo | Bollards | 176-240 V AC | arrayLED 18 W DC - 20 W AC



		Cct	lm S - D	Optic
Grey	64737	M 2700	2416 - 2038	00 General (46°)
BK Grey	64724	W 3000	2588 - 2108	
DarkBrown	64729			

Accessories Pag. 651

Accessories



description	type
64758	Tie rods
suitable for: Ryo	