

MAXI TUBE

Polycarbonate with UV protection. Neoprene cables.



Technical details


Opal or embossed polycarbonate tube with waterproof closing system using side plugs in transparent polycarbonate. The diameter of the tube is 33 mm.




Scale 1:1

612


Maxi Tube | topLED | 220-240 V AC | 13 W DC - 14,5 W AC




Maxi Tube | topLED | 220-240 V AC | 20 W DC - 22 W AC




Maxi Tube | topLED | 220-240 V AC




Maxi Tube IN&OUT | topLED | 220-240 V AC | 13 W DC - 14,5 W AC



Maxi Tube IN&OUT | topLED | 220-240 V AC | 20 W DC - 22 W AC



Maxi Tube IN&OUT | topLED | 220-240 V AC



	Cct	Im S - Im D	Opt
CRI 90			
OP 92245	W	1440 - 1154	30 (99°x 85°)
EB 92442	N	1501 - 1226	12 (107°x 129°)
DALI - CRI 90			
OP 84359			
EB 84357			

Accessories (pag 615)



	Cct	Im S - Im D	Opt
CRI 90			
OP 92246	W	2318 - 1904	30 (126°x 106°)
EB 92443	N	2478 - 2022	12 (128°x 125°)
DALI - CRI 90			
OP 84363			
EB 84361			

Accessories (pag 615)



	Cct	Im S - Im D	Im S - Im D	Opt
CRI 90				
37W DC - 40,5W AC	W	3974 - 3231	2479 - 2017	30 (137°x 95°)
OP 92247	N	4248 - 3431	2699 - 2196	12 (143°x 118°)
EB 92444				
DALI - CRI 90				
20W DC - 22W AC				
OP 84367				
EB 84365				

Accessories (pag 615)



	Cct	Im S - Im D	Opt
CRI 90			
OP 92353	W	1440 - 1154	30 (99°x 85°)
EB 92448	N	1501 - 1226	12 (107°x 129°)
DALI - CRI 90			
OP 84371			
EB 84369			

Accessories (pag 615)



	Cct	Im S - Im D	Opt
CRI 90			
OP 92356	W	2318 - 1904	30 (126°x 106°)
EB 92449	N	2478 - 2022	12 (128°x 125°)
DALI - CRI 90			
OP 84375			
EB 84373			

Accessories (pag 615)



	Cct	Im S - Im D	Im S - Im D	Opt
CRI 90		37W	20W	
37W DC - 40,5W AC	W	3974 - 3231	2479 - 2017	30 (137°x 95°)
OP 92357	N	4248 - 3431	2699 - 2196	12 (143°x 118°)
EB 92450				
DALI - CRI 90				
20W DC - 22W AC				
OP 84379				
EB 84377				

Accessories (pag 615)

Finishes	Cct
OP Opaline	W 3000
EB Embossed	N 4000

Linear systems

613

ROZAFKA CASTLE

Shkodra (Albania)

Lighting Designer:

Fulvio Baldeschi

Photography:

Pietro Savorelli

Linear system

614


Multiple connection

Fixture available in two variations: version **Maxi Tube** with single input cable for installation of a single article or as end-of-line, version **Maxi Tube IN&OUT** with double cable input and output cable to be able to create continuous lines of light with the use of specific accessories (On-Off / DALI max 600W).

Maxi Tube: with single cable



Maxi Tube IN&OUT: with double cable, one input and one output

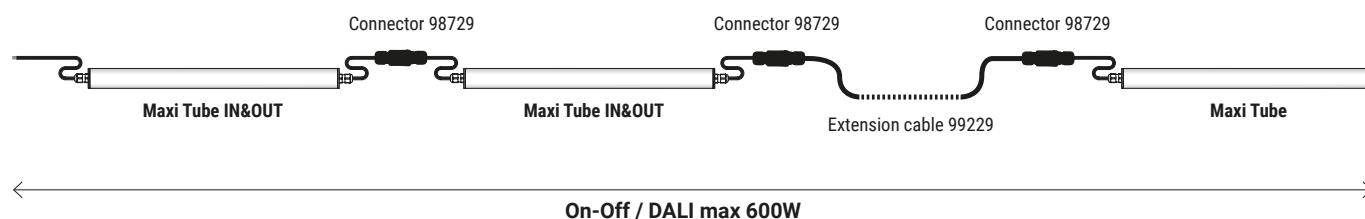

Accessories

1x



99226

Fastening kit with nickel-plated steel clips. Two fastening kits are required for installation.

suitable for: Maxi Tube / Maxi Tube IN&OUT

1x



98695

Fastening kit with safety clasp. Two fastening kits are required for installation.

suitable for: Maxi Tube / Maxi Tube IN&OUT



99229

per meter

Extension cable in neoprene 2x1 mm² ON-OFF. Example: 99229 x 3 pz = 3 m.

83205

per meter

Extension cable in neoprene 4x1,5 mm² DALI. Example: 83205 x 3 pz = 3 m.

suitable for: Maxi Tube / Maxi Tube IN&OUT


1x



99227

Fastening kit with nickel-plated steel clips and connector. Two fastening kits are required for installation.

suitable for: Maxi Tube / Maxi Tube IN&OUT



C-F100017

Suspension fixing system with 2000 mm long steel cable. Two fastening kits are required for installation.

suitable for: Maxi Tube / Maxi Tube IN&OUT



98729

Quick connector IP68 socket/plug. 2 poles ON-OFF.

99768

Quick connector IP68 socket/plug. 5 poles DALI.

suitable for: Maxi Tube / Maxi Tube IN&OUT