

CAPITAL 200

FAÇADE LIGHTING

Allowing a smooth blending in every architectural background through its modern design and extremely sleek profile, **CAPITAL 200** delivers a powerful output from a compact body with outstanding performances. Fitted with a variety of optional high build and design optics groups for the utmost optical efficiency, this versatile floodlight also assures balanced projection and photometric flexibility tailored to the selective demands of the most sophisticated architectural needs.




C A P I T A L 2 0 0

Fox Belysning AB Tellusgängen 8 Telefonplan 126 26 Hägersten 08-440 85 40

GRIVEN

CAPITAL 200

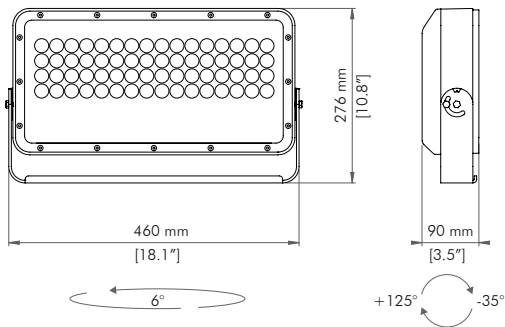

BEAM ANGLE REFERENCE

RGBW		WHITE LIGHT	
SPOT	8°	SPOT	12°
NARROW	12°	NARROW	15°
MEDIUM	23°	MEDIUM	25°
WIDE	43°	WIDE	47°
EXTRA WIDE	68°	EXTRA WIDE	61°
ELLIPTICAL	11°x41°	ELLIPTICAL	14°x39°
ELLIPTICAL WIDE	22°x39°	ELLIPTICAL WIDE	23°x37°
WALL WASH	14°(5° incline)x37°	WALL WASH	19°(5° incline)x38°

MAX OUTPUT
16275 lm
(SP CW configuration)

PHOTOMETRIC DETAILS AVAILABLE ON OUR WEBSITE

FEATURES AND OPTIONS



ACCESSORIES



CODES

AL5010 CAPITAL 200
AL5012 CAPITAL 200 POLAR EDITION

OPTICS	LED TYPE	CONTROL SYSTEM
SP Spot	RN RGB+W 4000K	R DMX-RDM
NA Narrow	DW From 2700K to 6500K	W DMX-RDM wireless
ME Medium	CW Cold White 6500K	D DALI
WI Wide	NW Natural White 4000K	
EW Extra wide	WW Warm White 3000K	
EL Elliptical		
WL Elliptical wide		
WW Wall wash		

FINISH	CABLE TYPE
W White RAL 9003	S POWER IN, DMX IN, DMX OUT
G GRIVEN Grey	C Monocable with connectors
A Anthracite RAL 7016	M Monocable without connectors
B Black RAL 9005	

NOTES

Unless an RDM compatible control is used, CAPITAL 200 must always be purchased with AL1321 Infrared Remote Control. More CAPITAL 200 units can be controlled with one AL1321.

TECHNICAL SPECIFICATIONS

CAPITAL 200 is an IP67 medium sized floodlight, whose die cast aluminium body hosts 64 high brightness RGBW, Dynamic White, Cold White, Natural White, Warm White or, on request, monochrome power LEDs. Dimensions: 460 mm x 90 mm x 276 mm. Available in DMX, automatic and Master-Slave mode, it also features RFU (Remote firmware update), and RDM (Remote device management) functions. DALI or DMX-RDM wireless control available on request. Unless an RDM compatible control is used, one Infrared Remote Control AL1321 must always be purchased for one or more CAPITAL 200 units in order to access DMX addressing, stand-alone operations and DMX channels configurations. Power supply: standard 100÷277V / 50-60Hz. Power consumption: RGBW 0.71A @ 230V / 155W max, W 0.68A @ 230V / 148W max. An Electrical Class I appliance, it also features self-resetting fuse protection as well as integrated electronic thermal protection management. The Polar Edition, fitted with an integrated de-icing system with electrically heated glass, is available on request. Operating temperature: -40°C to 50°C (-40°F to 122°F).

DIGITAL CONTROL SYSTEM SPECIFICATIONS AND CONFIGURATIONS AVAILABLE ON OUR WEBSITE



AUSTRALIA_Adelaide Oval, Adelaide



CAPITAL 200 US

FAÇADE LIGHTING

Allowing a smooth blending in every architectural background through its modern design and extremely sleek profile, **CAPITAL 200 US** delivers a powerful output from a compact body with outstanding performances at long distances owing to its ultra narrow optics.




CAPITAL 200 US

Fox Belysning AB Tellusgängen 8 Telefonplan 126 26 Hägersten 08-440 85 40


GRIVEN

CAPITAL 200 US

GRIVEND

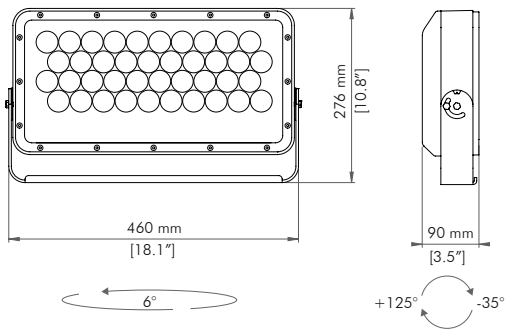

BEAM ANGLE REFERENCE

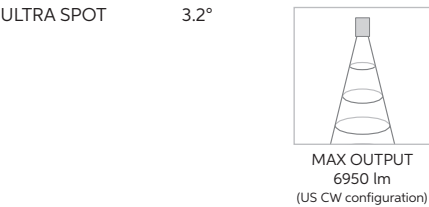


PHOTOMETRIC DETAILS AVAILABLE ON OUR WEBSITE

FEATURES AND OPTIONS



ACCESSORIES

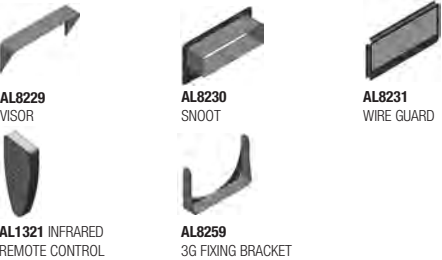

CODES

AL5010 CAPITAL 200
AL5012 CAPITAL 200 POLAR EDITION

OPTICS	LED TYPE	CONTROL SYSTEM
US Ultra spot	RN RGB+W 4000K DW From 2700K to 6500K CW Cold White 6500K NW Natural White 4000K WW Warm White 3000K	R DMX-RDM W DMX-RDM wireless D DALI

FINISH	CABLE TYPE
W White RAL 9003 G GRIVEN Grey A Anthracite RAL 7016 B Black RAL 9005	S POWER IN, DMX IN, DMX OUT C Monocable with connectors M Monocable without connectors

NOTES

Unless an RDM compatible control is used, CAPITAL 200 US must always be purchased with AL1321 Infrared Remote Control. More CAPITAL 200 US units can be controlled with one AL1321.

TECHNICAL SPECIFICATIONS

CAPITAL 200 US is an IP67 medium sized floodlight, whose die cast aluminium body hosts 40 high brightness RGBW, Dynamic White, Cold White, Natural White, Warm White or, on request, monochrome power LEDs. Dimensions: 460 mm x 90 mm x 276 mm. Available in DMX, automatic and Master-Slave mode, it also features RFU (Remote firmware update), and RDM (Remote device management) functions. DALI or DMX-RDM wireless control available on request. Unless an RDM compatible control is used, one Infrared Remote Control AL1321 must always be purchased for one or more CAPITAL 200 US units in order to access DMX addressing, stand-alone operations and DMX channels configurations. Power supply: standard 100÷277V / 50-60Hz. Power consumption: 0.63A @ 230V / 139W max. An Electrical Class I appliance, it also features self-resetting fuse protection as well as integrated electronic thermal protection management. The Polar Edition, fitted with an integrated de-icing system with electrically heated glass, is available on request. Operating temperature: -40°C to 50°C (-40°F to 122°F).

DIGITAL CONTROL SYSTEM SPECIFICATIONS AND CONFIGURATIONS AVAILABLE ON OUR WEBSITE



HUNGARY_Puskás Arena, Budapest



CAPITAL 200 MC

FAÇADE LIGHTING

Responding to aesthetic appeal and chromatic adaptability criteria, **CAPITAL 200 MC** features multichip LEDs, which enhance seamless light distribution and smooth colour transition. Allowing a perfect blending in every architectural background through its eye-catching design and extremely sleek profile, **CAPITAL 200 MC** delivers a powerful output from a compact body with outstanding performances.




CAPITAL 200 MC

Fox Belysning AB Tellusgängen 8 Telefonplan 126 26 Hägersten 08-440 85 40

GRIVEN

CAPITAL 200 MC

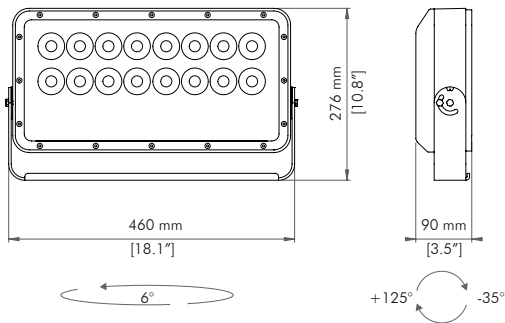

BEAM ANGLE REFERENCE

SPOT	7°
NARROW	10°
MEDIUM	23°
WIDE	35°

MAX OUTPUT
4524 lm
(SP DW configuration)

PHOTOMETRIC DETAILS AVAILABLE ON OUR WEBSITE

FEATURES AND OPTIONS

MC
RGBW

DW

RAL9003

GRIVEN GREY

RAL7016

RAL9005

IP67

IK09

9.5 KG

OPTIONAL
ANTI-SALINE

OPTIONAL
POLAR

DMX

RFU

RDM

OPTIONAL
DALI

OPTIONAL
WIRELESS DATA

CLASS

CE

SP[®]
C US

ACCESSORIES

AL8229
VISOR

AL8230
SNOOT

AL8231
WIRE GUARD

AL1321 INFRARED
REMOTE CONTROL

AL8259
3G FIXING BRACKET

CODES

AL5011 CAPITAL 200 MC

AL5013 CAPITAL 200 MC POLAR EDITION

OPTICS	LED TYPE	CONTROL SYSTEM
SP Spot	RN RGB+W 4000K	R DMX-RDM
NA Narrow	DW From 3000K to 6500K	W DMX-RDM wireless
ME Medium		D DALI
WI Wide		

FINISH

- W White RAL 9003
- G GRIVEN Grey
- A Anthracite RAL 7016
- B Black RAL 9005

CABLE TYPE

- S POWER IN, DMX IN, DMX OUT
- C Monocable with connectors
- M Monocable without connectors

NOTES

Unless an RDM compatible control is used, CAPITAL 200 MC must always be purchased with AL1321 Infrared Remote Control. More CAPITAL 200 MC units can be controlled with one AL1321.

TECHNICAL SPECIFICATIONS

CAPITAL 200 MC is an IP67 medium sized floodlight, whose die cast aluminium body hosts 16 high brightness RGBW or Dynamic White multichip LEDs. Dimensions: 460 mm x 90 mm x 276 mm. Available in DMX, automatic and Master-Slave mode, it also features RFU (Remote firmware update), and RDM (Remote device management) functions. DALI or DMX-RDM wireless control available on request. Unless an RDM compatible control is used, one Infrared Remote Control AL1321 must always be purchased for one or more CAPITAL 200 MC units in order to access DMX addressing, stand-alone operations and DMX channels configurations. Power supply: standard 100÷277V / 50-60Hz. Power consumption: 0.71A @ 230V / 156W max. An Electrical Class I appliance, it also features self-resetting fuse protection as well as integrated electronic thermal protection management. The Polar Edition, fitted with an integrated de-icing system with electrically heated glass, is available on request. Operating temperature: -40°C to 50°C (-40°F to 122°F).

DIGITAL CONTROL SYSTEM SPECIFICATIONS AND CONFIGURATIONS AVAILABLE ON OUR WEBSITE



ECUADOR_Cathedral of the Immaculate Conception, Cuenca

