

PARADE D-RGB-510



Designed for refined wall grazing effects, the Parade D-RGB series, featuring 5 or 10 high efficiency RGB full colour LEDs and a comprehensive selection of optics groups, offers an array of innovative and cost efficient outdoor and indoor lighting solutions. Benefiting from an IP67 protection rate, compact size and lightweight manageability, these high performance modular bars can be easily installed in any position and orientation.



TECHNICAL SPECIFICATIONS

5 or 10 high brightness RGB full colour power LEDs units
Continuously variable light intensity
DMX, automatic and Master-Slave mode
Remote firmware update (RFU)
Power supply:
standard 100÷240V / 50-60Hz
Power consumption:
D-RGB-5 0.15A @ 230V / 20W max
D-RGB-10 0.3A @ 230V / 40W max
Electrical class: I
Self-resetting fuse protection
Integrated electronic thermal protection management
Meets CE safety standards

Extruded aluminium body
IP67
Operating temperature:
-40°C to 50°C (-40°F to 122°F)
D-RGB-5: 2.8 Kg
D-RGB-10: 4.7 Kg

DIGITAL CONTROL SYSTEM SPECIFICATIONS AND CONFIGURATIONS AVAILABLE ON OUR WEBSITE



PARADE D-RGB-5 10

LINEAR WALL GRAZING

CODES

AL2310 PARADE D-RGB-5 NARROW
AL2312 PARADE D-RGB-5 MEDIUM
AL2314 PARADE D-RGB-5 WIDE
AL2316 PARADE D-RGB-5 ELLIPTICAL

AL2300 PARADE D-RGB-10 NARROW
AL2302 PARADE D-RGB-10 MEDIUM
AL2304 PARADE D-RGB-10 WIDE
AL2306 PARADE D-RGB-10 ELLIPTICAL

FEATURES AND OPTIONS




*PARADE D-RGB-5
**PARADE D-RGB-10



BEAM ANGLE REFERENCE


	D-RGB-5	D-RGB-10
NARROW	18°x27°	15°x40°
MEDIUM	28°x36°	28°x46°
WIDE	39°x45°	35°x52°
ELLIPTICAL	20°x57°	15°x59°

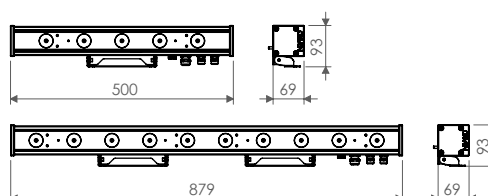

PHOTOMETRIC DETAILS AVAILABLE ON OUR WEBSITE







LINEAR WALL GRazing



 GRIVEN