



PARADE S is a modular and adjustable high luminance linear module featuring 20, 40 or 60 RGBW LEDs grouped in clusters of 4 LEDs each, whereas white LED configurations are also available. Superb output with real uniform coverage even on close-up installations is provided by the specifically conceived elliptical and elliptical wide optics purposely designed for true wall washing effects. The outstandingly powerful luminous flux tops the standard range of similar products available on the market and a truly comfortable set up is guaranteed by the total absence of external power supply box requirement.



TECHNICAL SPECIFICATIONS

20, 40 or 60 high brightness RGBW or white power LEDs units
Continuously variable light intensity
DMX remote control
Remote firmware update (RFU)
RDM function
Infrared remote control
Power supply:
standard 100÷240V / 50-60Hz
Power Consumption:
S-RGBW-20 0.17A @ 230V / 28W max
S-RGBW-40 0.35A @ 230V / 49W max
S-RGBW-60 0.45A @ 230V / 72W max
Electrical class: I
Self-resetting fuse protection

Meets CE and CSA safety standards
Extruded aluminium body
IP67
Operating temperature:
-40°C to 50°C (-40°F to 122°F)
Integrated electronic thermal protection management
Polar Edition, featuring an integrated de-icing system with electrically heated glass, available on request.
S-20: 2.7 Kg
S-40: 4.5 Kg
S-60: 6 Kg

DIGITAL CONTROL SYSTEM SPECIFICATIONS AND CONFIGURATIONS AVAILABLE ON OUR WEBSITE



PARADE S-20 40 60

LINEAR WALL GRAZING

CODES

AL2585/87/90 PARADE S-RGBW-20/40/60 MEDIUM
AL2554/64/74 PARADE S-RGBW-20/40/60 WIDE
AL2558/68/78 PARADE S-RGBW-20/40/60 ELLIPTICAL
AL2580/84/88 PARADE S-RGBW-20/40/60 ELLIPTICAL WIDE
AL2582/86/89 PARADE S-RGBW-20/40/60 WALL WASH

AL3114/24/34 PARADE S-CW-20/40/60 MEDIUM
AL3110/20/30 PARADE S-CW-20/40/60 WIDE
AL3111/21/31 PARADE S-CW-20/40/60 ELLIPTICAL
AL3112/22/32 PARADE S-CW-20/40/60 ELLIPTICAL WIDE
AL3113/23/33 PARADE S-CW-20/40/60 WALL WASH

AL3119/29/39 PARADE S-WW-20/40/60 MEDIUM
AL3115/25/35 PARADE S-WW-20/40/60 WIDE
AL3116/26/36 PARADE S-WW-20/40/60 ELLIPTICAL
AL3117/27/37 PARADE S-WW-20/40/60 ELLIPTICAL WIDE
AL3118/28/38 PARADE S-WW-20/40/60 WALL WASH

AL3160/65/70 PARADE S-DW-20/40/60 MEDIUM
AL3161/66/71 PARADE S-DW-20/40/60 WIDE
AL3162/67/72 PARADE S-DW-20/40/60 ELLIPTICAL
AL3163/68/73 PARADE S-DW-20/40/60 ELLIPTICAL WIDE
AL3164/69/74 PARADE S-DW-20/40/60 WALL WASH

NOTES

On request, Parade S is available also in the CSA certified version.

The Polar Edition can be ordered by adding PE to the code.

Parade S must always be purchased with AL1321 Infrared Remote Control. More units of Parade S can be controlled with one AL1321.

ACCESSORIES



AL4333 BARNDOR FOR PARADE S-20
AL4337 BARNDOR FOR PARADE S-40
AL4341 BARNDOR FOR PARADE S-60



AL4330 SNOOT FOR PARADE S-20
AL4334 SNOOT FOR PARADE S-40
AL4338 SNOOT FOR PARADE S-60



AL4331 VISOR FOR PARADE S-20
AL4335 VISOR FOR PARADE S-40
AL4339 VISOR FOR PARADE S-60



AL1321 INFRARED REMOTE CONTROL

FEATURES AND OPTIONS




*PARADE S-RGBW-20
** PARADE S-RGBW-40/60



BEAM ANGLE REFERENCE

MEDIUM	27°x39°
WIDE	45°
ELLIPTICAL	14°x55°
ELLIPTICAL WIDE	37°x109°
WALL WASH	18° (6° incline) x 47°

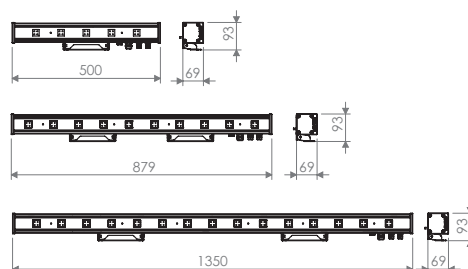

PHOTOMETRIC DETAILS AVAILABLE ON OUR WEBSITE







LINEAR WALL GRAZING

 GRIVEN