

dirigo



The Dirigo series is a new lighting concept for outdoor spaces. Available as single elements or modules to create continuous lines, it is a ground profile designed to illuminate walkways and other foot traffic areas, and be placed along paths and walls to mark out routes. It can be safely walked on, and its distinctive and award-winning design features a hidden light source that creates controlled, ground-hugging and glare-free illumination.

Materials

Aluminium or AISI 316L stainless steel body



dirigo lighting concept

Concept

Invisible during the day. Main actor during the night. Dirigo creates lighting paths through an elegant opposite plans game, hiding the source. Its peculiar profile's section makes the fixture compact and solid, perfectly integrated in all outdoor contexts.


Technology and materials

Dirigo series available in brushed stainless steel AISI 316L or anodized extruded aluminum with polyester powder pre-coating antioxiide treatment.



Grazing light

The internal Led source gradient was studied for the best lighting distribution, along the pathways..



Range

Dirigo is available as single module or prepared for continuous line installation.

Single module (L. 1mt)

Sealed and complete source profile, end caps, integrated driver 24V DCo.

Continuous line installation modules

On measure cutting profiles, prepared for continuous line installation up to 5/10m. Led source available with a separated code and on measure cutting.
Mechanical connection joints between profiles.
Remote driver 24 V DC.



Complete element version





System

Robust design

The opposing level structure of Dirigo's single profile makes this appliance particularly sturdy and resistant. The absence of raw edges makes it ideal for public and private outdoor applications. Dirigo can be walked on and is extremely safe for users.



Dirigo_FL2 Aluminium | Linear profiles | 100-264 V | stripLED 14,4 W

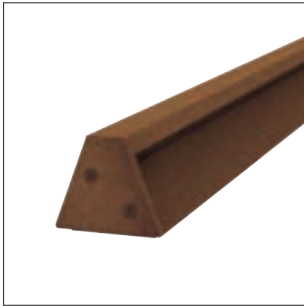


CRI 80

BK Grey	64643	3000K	1454 lm	W	General	00
Grey	64642					
Cor-Ten	64594					



Dirigo_FL1 Steel | Linear profiles | 100-264 V | stripLED 14,4 W




CRI 80

Steel	64590	3000K	1454 lm	W	General	00
-------	--------------	-------	---------	----------	---------	-----------




ACCESSORIES AND CONFIGURATION



Sealing caps

Aluminium
2 pcs


BK Grey	64641
Grey	64640
Cor-Ten	64589



Joining caps

Aluminium
1 pc

BK Grey	64661
Grey	64663
Cor-Ten	64662



62403
Lighting unit

Led strip 14,4 W/m
3000K
5 mt

62403N
Lighting unit
Led strip 14,4 W/m
4000K
5 mt



89629
Connection cable


2 mt




99000
Extension

2 mt


Electronics




99331
ON/OFF
150 W




99332
0/1-10V
150 W



99722
DALI
120 W

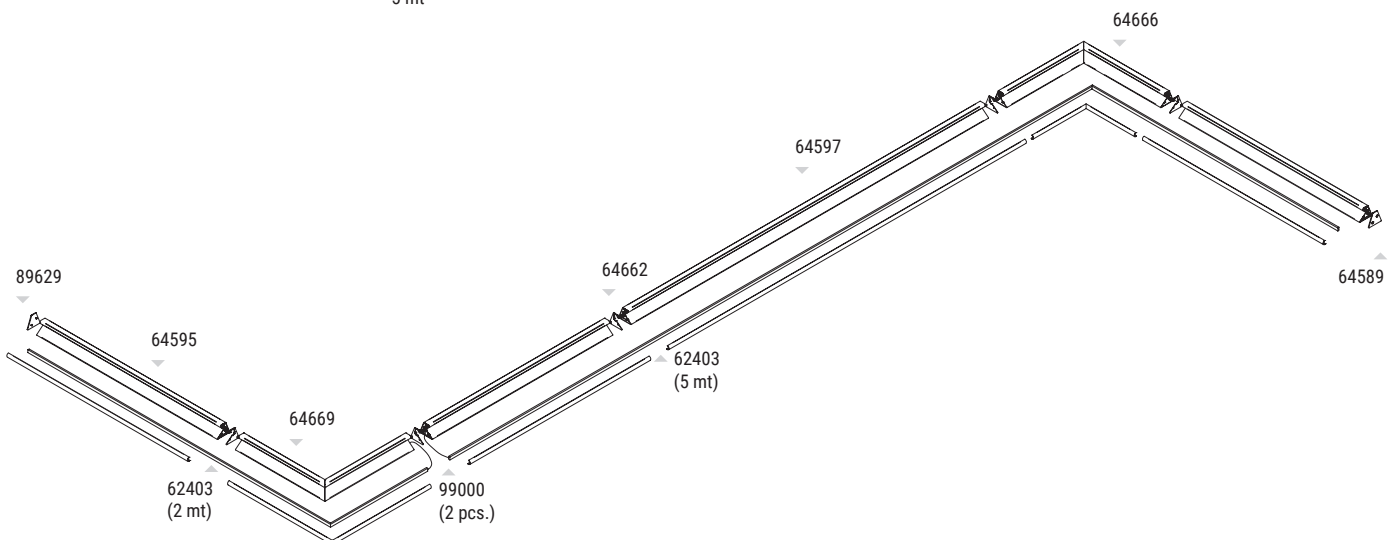

Dirigo_M2 Aluminium MASTER | Linear profiles




BK Grey	64645	1010 mm
Grey	64644	1010 mm
Cor-Ten	64595	1010 mm

Master

To be completed with dedicated installation accessories and with lighting unit

Dirigo_M2 Aluminium SLAVE | Linear profiles




BK Grey	62400	1000 mm
Grey	62401	1000 mm
Cor-Ten	62402	1000 mm
BK Grey	64647	2000 mm
Grey	64646	2000 mm
Cor-Ten	64597	2000 mm

Slave

To be completed with dedicated installation accessories and with lighting unit


Dirigo_M2 Aluminium IN-corner | Linear profiles

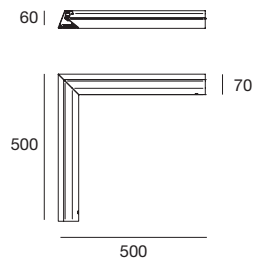

BK Grey	64664	500 x 500 mm
Grey	64665	500 x 500 mm
Cor-Ten	64666	500 x 500 mm

To be completed with dedicated installation accessories and with lighting unit


Dirigo_M2 Aluminium OUT-corner | Linear profiles

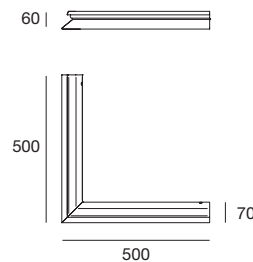

BK Grey	64667	500 x 500 mm
Grey	64668	500 x 500 mm
Cor-Ten	64669	500 x 500 mm

To be completed with dedicated installation accessories and with lighting unit

Dirigo_M1 Steel MASTER | Linear profiles




Steel **64591** 1010 mm

Master

To be completed with dedicated installation accessories and with lighting unit

Dirigo_M1 Steel SLAVE | Linear profiles




Steel **64648** 1000 mm

Slave


To be completed with dedicated installation accessories and with lighting unit

ACCESSORIES AND CONFIGURATION



64592
Sealing caps

Stainless steel
2 pcs



64593
Joining caps

Stainless steel
1 pc



62403
Lighting unit

Led strip 14,4 W/m
3000K
5 mt

62403N
Lighting unit

Led strip 14,4 W/m
4000K
5 mt



89629
Connection cable


2 mt




99000
Extension

2 mt


Electronics



99331
ON/OFF
150 W



99332
0/1-10V
150 W



99722
DALI
120 W

