


edith

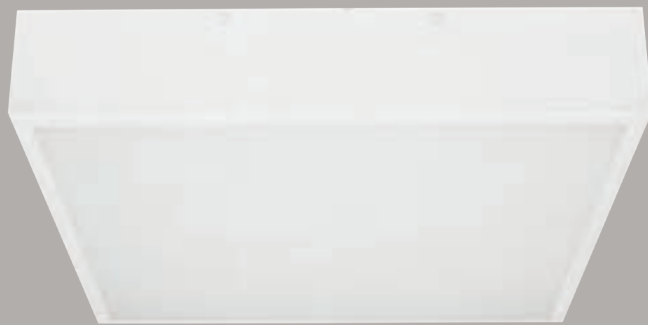

Edith is the ideal partner for an effective environmental lighting of work spaces. It offers high performance and energy saving fully complying with the regulations in force. Installation is straightforward, thanks to the perfect integration with modular dropped ceilings: this makes designing the lighting of a space easy and intuitive.

Materials

Aluminium body
PMMA diffuser



Edith_M FL ON/OFF | Ceiling luminaires | 220-240 V | topLED 30 W DC - 33 W AC



78 | | 66



596

Efficiency - CRI 80

| | | | | | | | |
|-------|--------|--------------|--------|---------|----------|---------|-----------|
| White | ON/OFF | 97850 | 3000 K | 3990 lm | W | General | 00 |
| White | DALI | 97851 | 4000 K | 4227 lm | N | | |

Accessories



98282

Suspension wiring



98311

Frame



98313

Frame

RTG 97850W00
97850N00




UGR<19

Edith_M FL ON/OFF | Ceiling luminaires | 220-240 V | topLED 45 W DC - 49 W AC



78 | | 66



596

Efficiency - CRI 80

| | | | | | | | |
|-------|--------|--------------|--------|---------|----------|---------|-----------|
| White | ON/OFF | 97854 | 3000 K | 5675 lm | W | General | 00 |
| White | DALI | 97855 | 4000 K | 6026 lm | N | | |

Accessories



98282

Suspension wiring



98311

Frame



98313

Frame

RTG 97854W00
97854N00




Pixartprinting | Treviso, Italy



Edith_M | Single cable self-supporting kit


| size | suitable for | |
|--------------|---------------------|--------------|
| 603 x 603 mm | Edith_MFL 596 x 596 | 98311 |

Galvanised calendered metal support frame, for flushed installation with a quick-coupling mounting system.
Article to be combined with Edith_modular 600x600.

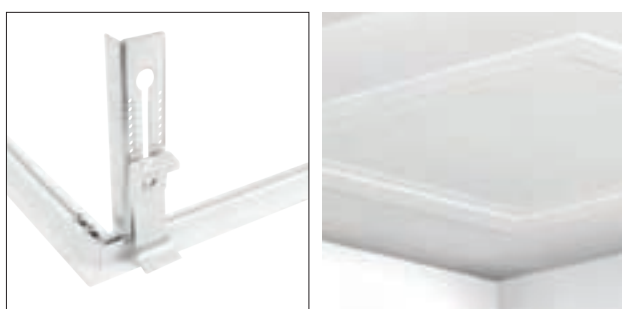Edith_M | Single cable self-supporting kit

| size | suitable for | |
|--------------|---------------------|--------------|
| 655 x 655 mm | Edith_MFL 596 x 596 | 98313 |

Aluminium support frame with embossed white finish, for exposed installation.
Article to be combined with Edith_modular 600x600, 600x300, 1200x300 and 1200x600.

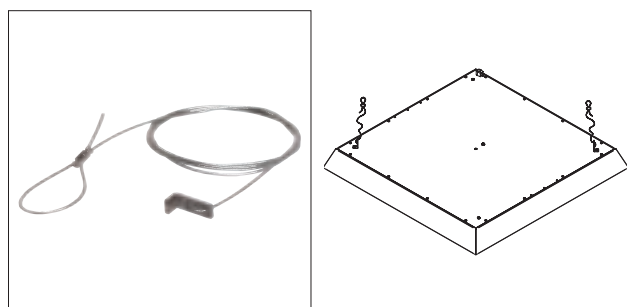Edith_M | Single cable self-supporting kit

| size | suitable for | |
|---------|---------------------|--------------|
| 2500 mm | Edith_MFL 596 x 596 | 98282 |

2.5-metre long steel safety cord with fixing bracket. It is recommended to apply at least two cords on the upper part between opposite corners of the ceiling lamp.


Edith_S | Ceiling luminaires | topLED 30 W 840 mA




CRI 80

| | | | | | | |
|-------|--------------|--------|---------|----------|---------|-----------|
| White | 96471 | 3000 K | 4293 lm | W | General | 00 |
| | | 4000 K | 4495 lm | N | | |


Electronics



99093
ON/OFF
1 art.




99187
0/1-10V DALI
1 art.




99330
DALI
1 art.



96471W00

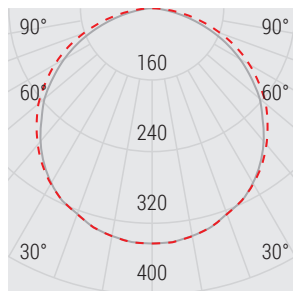


Photometric curve



Light beam



100 LUX 150 LUX 175 LUX 200 LUX 250 LUX 300 LUX 350 LUX

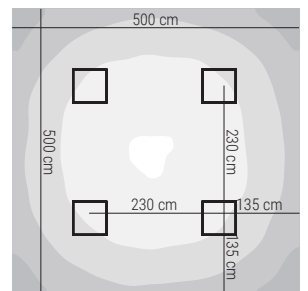

Floor plan

Endress+Hauser Italia | Milan, Italy



