


ice-cut66

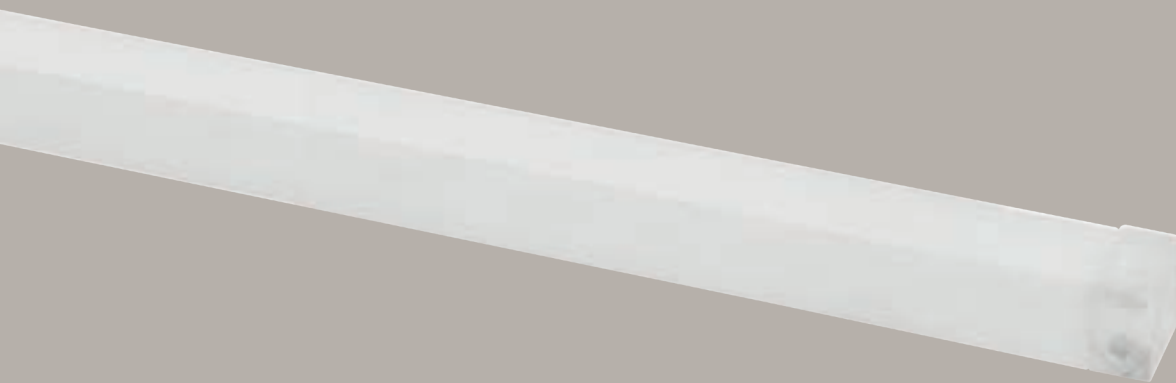

Extremely slender at only 10 millimetres thick, lightweight, and easy to install in any space, Ice-Cut66 can be used to create segmented light scenes or continuous lines, thanks to the cables exiting at the bottom of the light. This smart solution produces perfectly distributed intensity along the length of the light.


Materials

Translucent polycarbonate body





RTG 96741W00

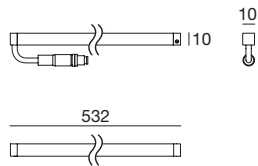


6 W - CRI 80

Opaline 96740	2700K	420 lm	M	General	00
	3000K	438 lm	W		
	4000K	478 lm	N		

Electronics

89179 ON/OFF 1 - 4 art.	89359 ON/OFF 1 - 8 art.	99331 ON/OFF 1 - 25 art.	99332 0/1-10V 1 - 25 art.	99722 DALI 1 - 20 art.
--------------------------------------	--------------------------------------	---------------------------------------	--	-------------------------------------

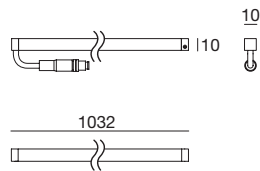


12 W - CRI 80

Opaline 96741	2700K	840 lm	M	General	00
	3000K	875 lm	W		
	4000K	956 lm	N		

Electronics

89179 ON/OFF 1 - 2 art.	89359 ON/OFF 1 - 4 art.	99331 ON/OFF 1 - 12 art.	99332 0/1-10V 1 - 12 art.	99722 DALI 1 - 10 art.
--------------------------------------	--------------------------------------	---------------------------------------	--	-------------------------------------



18 W - CRI 80

Opaline 96742	2700K	1260 lm	M	General	00
	3000K	1313 lm	W		
	4000K	1434 lm	N		


Electronics

89179 ON/OFF 1 art.	89359 ON/OFF 1 - 2 art.	99331 ON/OFF 1 - 7 art.	99332 0/1-10V 1 - 7 art.	99722 DALI 1 - 6 art.
----------------------------------	--------------------------------------	--------------------------------------	---------------------------------------	------------------------------------

Accessories

98398 2 x Fixing clips	99231 1 m Cable	99232 1 m Extension
-------------------------------------	------------------------------	----------------------------------

Ice-Cut66_F | Linear profiles | 24V | topLED 12 W/m

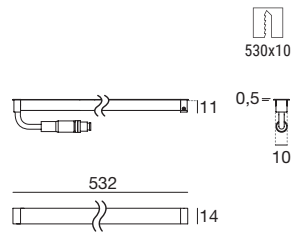


6 W - CRI 80

Opaline	81255	2700K	420 lm	M	General	00
		3000K	438 lm	W		
		4000K	478 lm	N		

Electronics

89179 ON/OFF 1 - 4 art.	89359 ON/OFF 1 - 8 art.	99331 ON/OFF 1 - 25 art.	99332 0/1-10V 1 - 25 art.	99722 DALI 1 - 20 art.

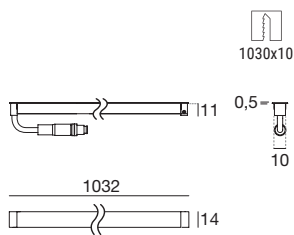


12 W - CRI 80

Opaline	81256	2700K	840 lm	M	General	00
		3000K	875 lm	W		
		4000K	956 lm	N		

Electronics

89179 ON/OFF 1 - 2 art.	89359 ON/OFF 1 - 4 art.	99331 ON/OFF 1 - 12 art.	99332 0/1-10V 1 - 12 art.	99722 DALI 1 - 10 art.

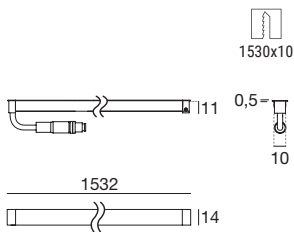

18 W - CRI 80

Opaline	81257	2700K	1260 lm	M	General	00
		3000K	1313 lm	W		
		4000K	1434 lm	N		

Electronics

89179 ON/OFF 1 art.	89359 ON/OFF 1 - 2 art.	99331 ON/OFF 1 - 7 art.	99332 0/1-10V 1 - 7 art.	99722 DALI 1 - 6 art.

Accessories



99231 1 m Cable	99232 1 m Extension
------------------------------	----------------------------------