




ilamt

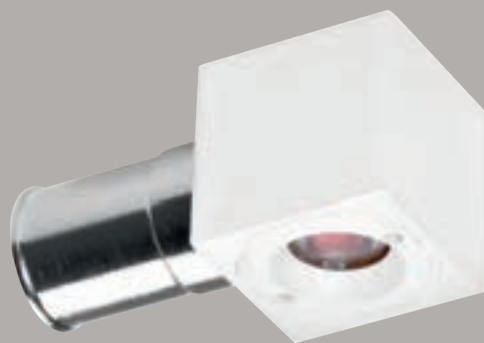

Ilamt comes small, squared and with minimal energy consumption. An applique for creating games of light and enhancing details, like objects placed on shelves.

Materials
Brass body

Ilamt | Wall light | powerLED 1 W 350 mA



18



Efficiency - CRI 80


White	93986	2700 K	136 lm	M	Spot	15
Nickel	93988	3000 K	145 lm	W	Medium Flood	30
		4000 K	155 lm	N	Flood	60

Electronics

89144 ON/OFF 1 - 2 art.
99708 0/1-10V converter 1 - 4 art.
 + driver CV 24V 981
99711 DALI converter 1 - 4 art.
 + driver CV 24V 981

Recessed casing
 1009 **84337**

Ilamt | Wall light | powerLED 2 W 630 mA



24



Efficiency - CRI 80


White	93566	2700 K	219 lm	M	Spot	10
Nickel	86679	3000 K	233 lm	W	Medium Flood	30
		4000 K	249 lm	N	Flood	50

Electronics

89147 ON/OFF 1 - 2 art.
99710 0/1-10V converter 1 art.
 + driver CV 24V 981
99713 DALI converter 1 art.
 + driver CV 24V 981

Recessed casing
 1009 **84349**

Ilamt66 | Wall light | powerLED 2 W 630 mA



24



Efficiency - CRI 80

White	97086	2700 K	219 lm	M	Narrow Spot	08
Nickel	97088	3000 K	233 lm	W	Spot	15
		4000 K	249 lm	N	Medium Flood	30
					Flood	60

Electronics

89420 ON/OFF 1 - 2 art.
99179 ON/OFF 3 - 6 art.
99186 ON/OFF 6 - 12 art.

Recessed casing
 1009 **84349**

IP66