

MINI TUBE

Polycarbonate with UV protection. Neoprene cables.





Minimum dimensions

LED tube with minimum dimensions, with a profile just 18 mm in diameter. The reduced dimensions allow easy and functional installations. Applied on the edges, corners or niches of shelving, Mini Tube is perfectly integrated into the setting.


IP65

IK08

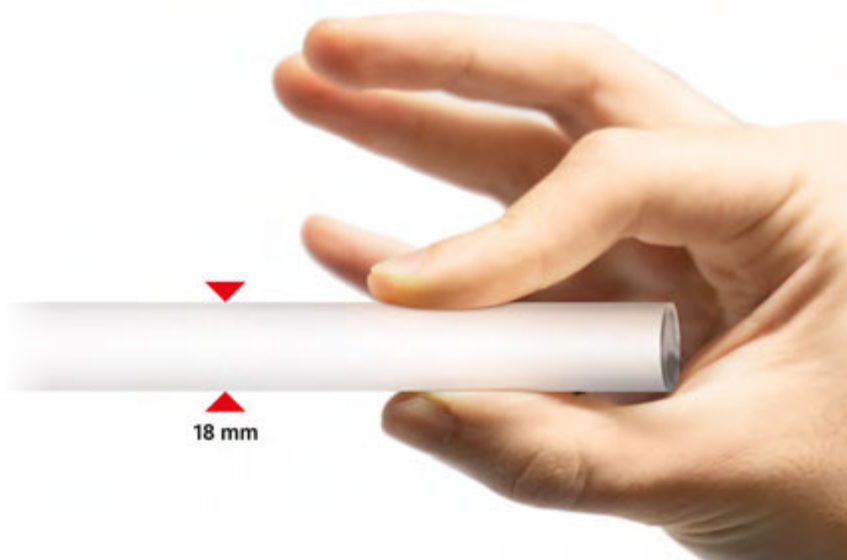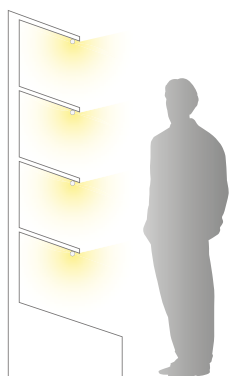

608


Mini Tube | topLED | 220-240 V AC



	Cct	lm S - lm D	Opt
L 331 - 4,5 W DC - 5,2 W AC			
OP 92392	W 586 - 465 N 612 - 486		00 (Diffused)
L 621 - 7,5 W DC - 8,5 W AC			
OP 92393	W 1172 - 929 N 1224 - 971		00 (Diffused)
L 911 - 9 W DC - 10,5 W AC			
OP 92421	W 1354 - 1069 N 1414 - 1116		00 (Diffused)
L 1201 - 12 W DC - 13,5 W AC			
OP 92422	W 2039 - 1626 N 2129 - 1698		00 (Diffused)
L 1491 - 14 W DC - 15,5 W AC			
OP 92423	W 2461 - 1951 N 2570 - 2038		00 (Diffused)
L 1781 - 16,5 W DC - 18 W AC			
OP 92424	W 2883 - 2285 N 3012 - 2387		00 (Diffused)

Accessories (pag 611)

Mini Tube IN&OUT | topLED | 220-240 V AC



	Cct	lm S - lm D	Opt
L 331 - 4,5 W DC - 5,2 W AC			
OP 92384	W 586 - 465 N 612 - 486		00 (Diffused)
L 621 - 7,5 W DC - 8,5 W AC - CRI 80			
OP 92385	W 1172 - 929 N 1224 - 971		00 (Diffused)
L 911 - 9 W DC - 10,5 W AC			
OP 92386	W 1354 - 1069 N 1414 - 1116		00 (Diffused)
L 1201 - 12 W DC - 13,5 W AC			
OP 92387	W 2039 - 1626 N 2129 - 1698		00 (Diffused)
L 1491 - 14 W DC - 15,5 W AC			
OP 92390	W 2461 - 1951 N 2570 - 2038		00 (Diffused)
L 1781 - 16,5 W DC - 18 W AC			
OP 92391	W 2883 - 2285 N 3012 - 2387		00 (Diffused)

Accessories (pag 611)

Finishes	Cct
OP Opaline	W 3000 N 4000

Linear systems



Accessories



2x

included

Polycarbonate clip springs kit.

suitable for: Mini Tube / Mini Tube IN&OUT



99229

per meter

Extension cable in neoprene 2x1 mm² ON-OFF.

Example: 99229 x 3 pz = 3 m.

suitable for: Mini Tube / Mini Tube IN&OUT



2x

98710

Nickel-plated steel springs kit.

suitable for: Mini Tube / Mini Tube IN&OUT



98729

Quick connector IP68 socket/plug.

2 poles ON-OFF.

suitable for: Mini Tube / Mini Tube IN&OUT

Multiple connection

Fixture available in two variations: version

Mini Tube with single input cable for installation

of a single article or as end-of-line, version **Mini**

TubeIN&OUT with double cable input and output cable

to be able to create continuous lines of light with the

use of specific accessories (Max 600W).

Mini Tube: with single cable



Mini Tube IN&OUT: with double cable, one input and one output

