

The background is a detailed line-art illustration in a muted grey tone. It depicts an industrial or construction setting. At the top, a large flywheel is visible. To the right, a worker in a hard hat and safety gear is working on a structure. In the center, a large gear or wheel is prominent. On the left, a person wearing safety glasses is shown in profile, looking down. At the bottom, a worker in a hard hat and safety vest is holding a clipboard. To the right of the worker, there is a recycling symbol and a building with windows. The overall style is technical and industrial.

MAESTRO 3.0

PROFESSIONAL ARCHITECTURAL LIGHTING

Orma

i-LèD




orma

Materials

Aluminium body

AISI 316L stainless steel flange

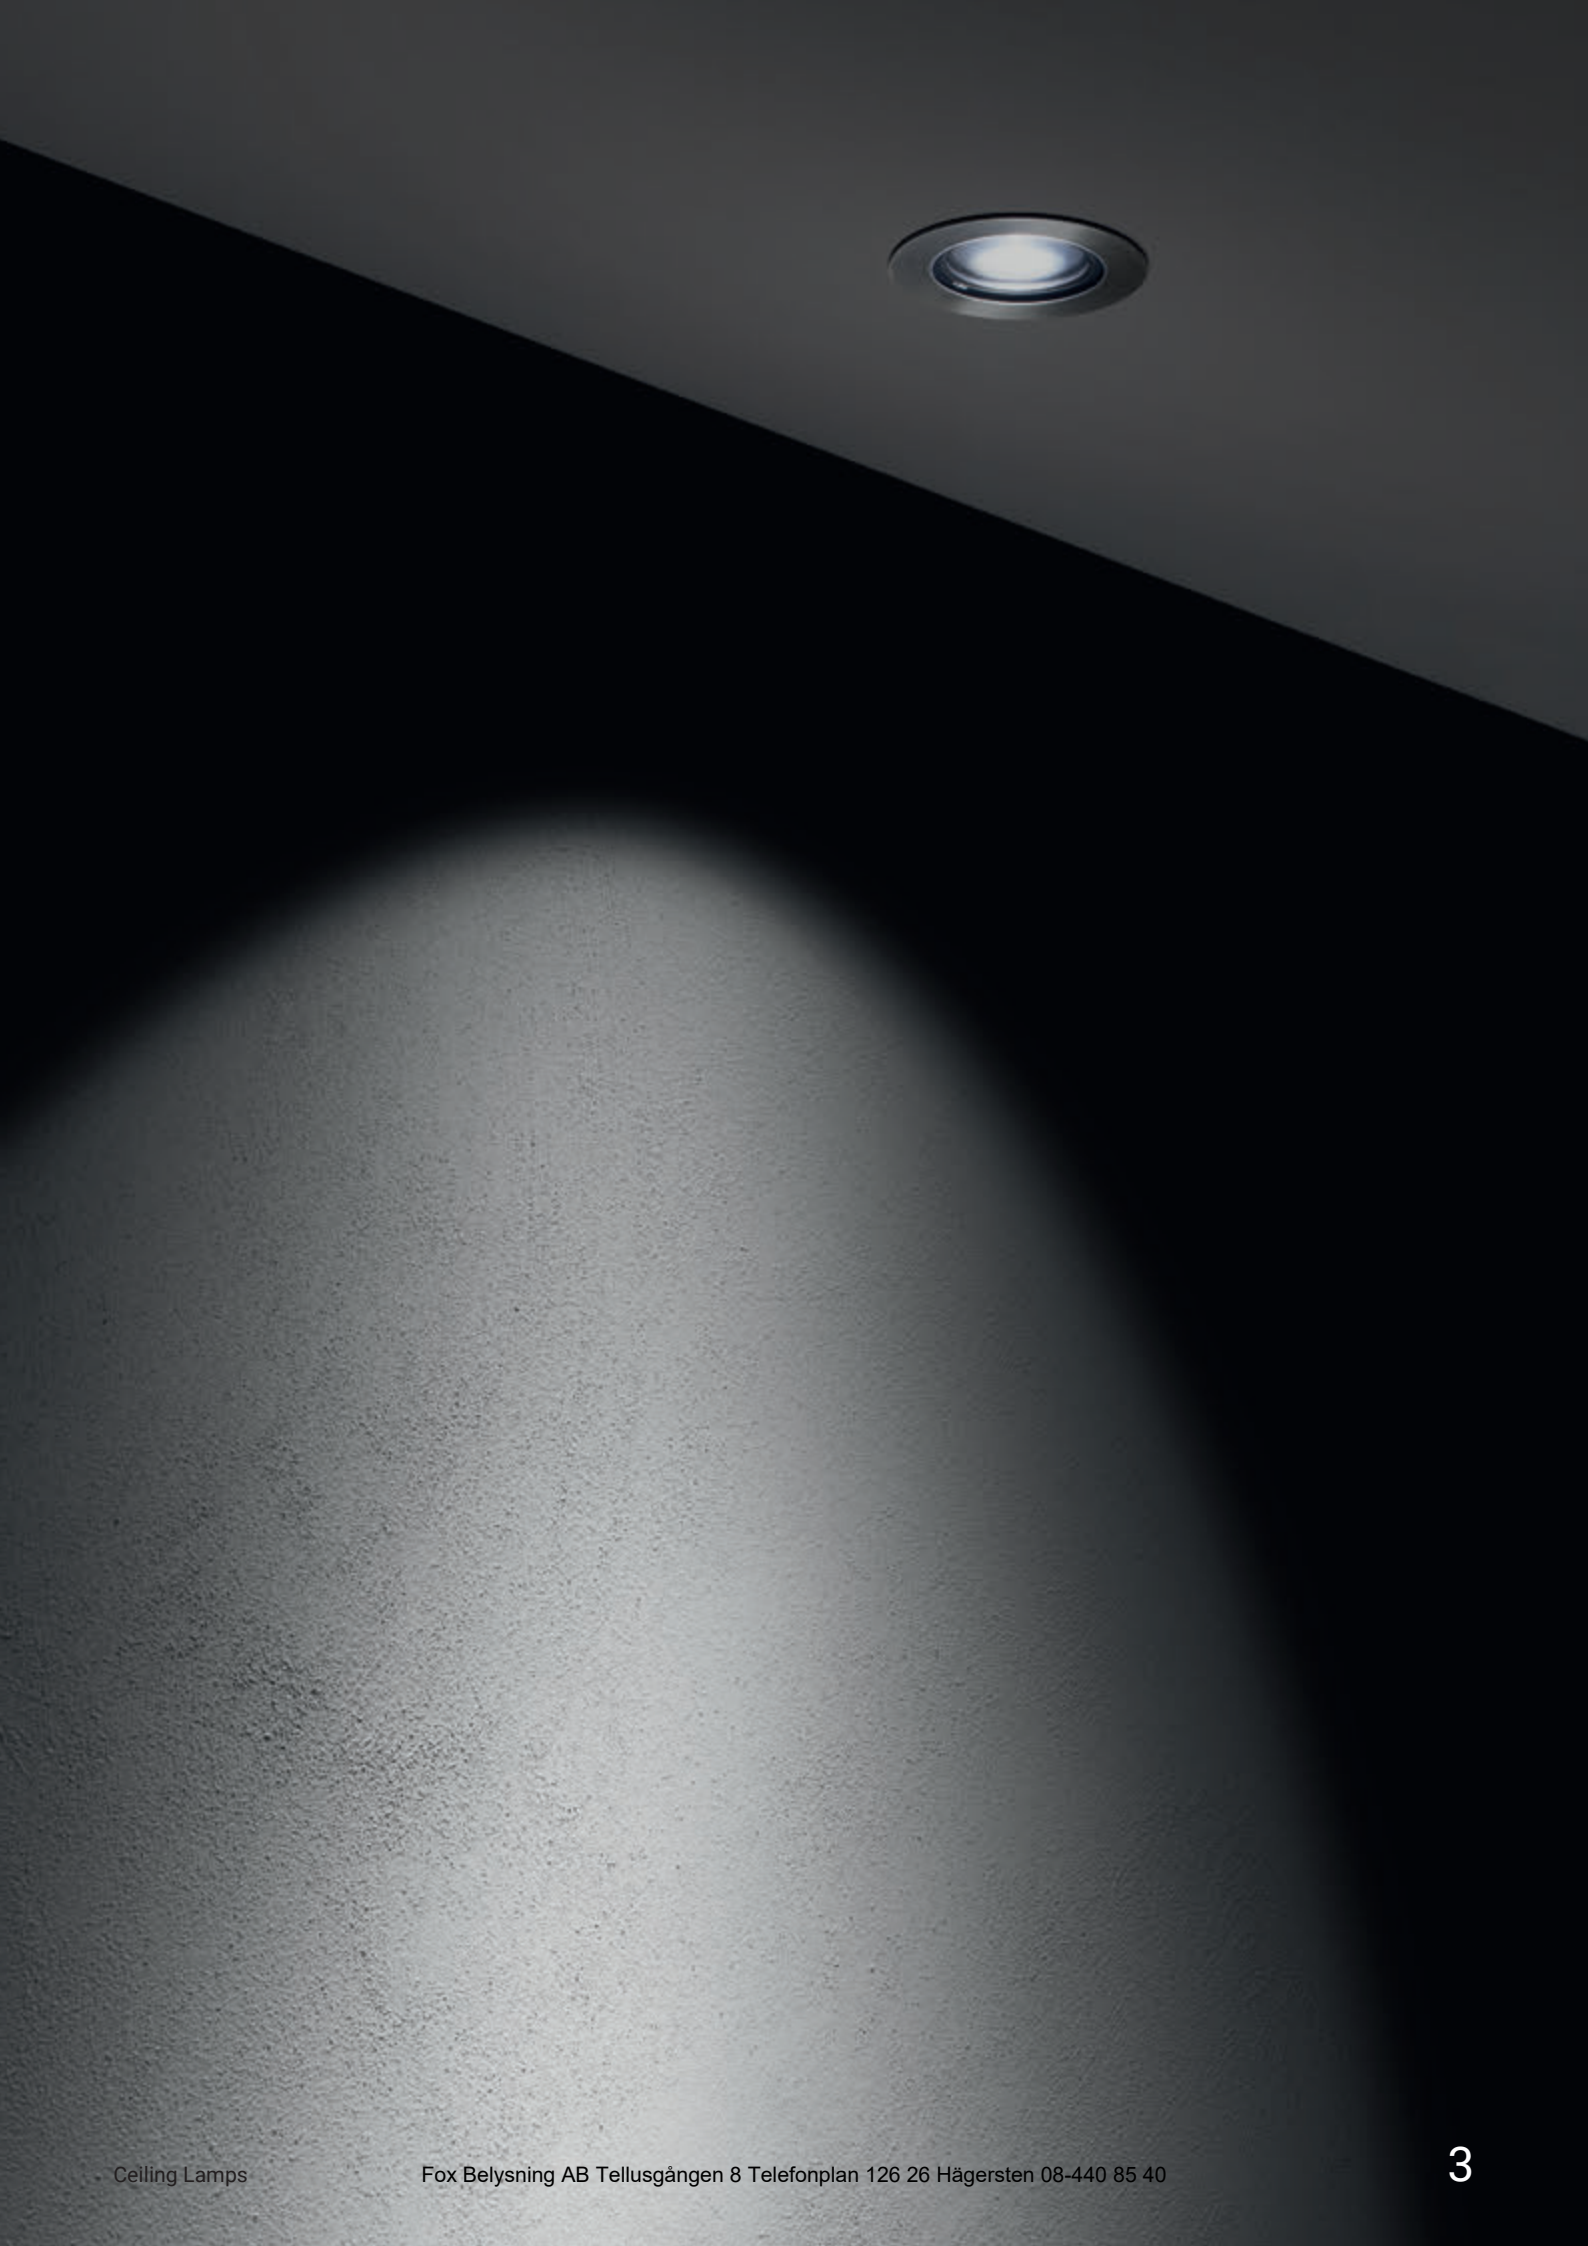

orma_c range



	_C Ceiling	_CJ Ceiling Adjustable
4W/5W	64 mm	64 mm
8W/9W	97 mm	97 mm
12W/13W	138 mm	138 mm
Accessories	HC DL	HC
Finish	Steel Alu	Steel Alu
CRI 80	2700K - 3000K - 4000K	2700K - 3000K - 4000K
Optics	Spot - Flood - Wide Flood Elliptic	Spot - Flood Wide Flood
Driver	On/Off - 1/10 V - DALI	On/Off - 1/10 V - DALI
Current	C.C. C.V.	C.C. C.V.
	55 mm 86 mm 127 mm	55 mm 86 mm 127 mm

Small overall dimensions

A small-footprint downlight, from 46 to barely 50 mm, with a small flange and Optics designed to fit inside the body. This smart solution makes the product easier to install.



Visual comfort

Depending on how the light is positioned, its beam can be optimised using the appropriate accessory. The honeycomb filter screens secondary light and reduces direct glare, while maintaining the same high and diffuse quality.

If the light is installed in a grazing position and you wish to light only part of the wall, you can use the darklight filter to section part of the beam and prevent direct glare even close to the source.



Orma



Orma
+ honeycomb



Orma
+ darklight


The range

A wide range of lighting options, including three Optics: spot, medium flood, and flood. There are also three sizes, and a choice of AC or DC. The Orma_C downlight range includes CJ swivel versions, which can be adjusted with a screwdriver without opening the body.



± 25° (8 W - 13 W)
± 20° (4 W)

Orma_C | Downlight | powerLED



C.C. - 4W DC 350 mA	Cct	lm S - D	Optic
Steel/Alu 81223	M 2700	490 - 270	15 Spot (22°)
	W 3000	490 - 270	30 Flood (29°)
	N 4000	529 - 292	60 W.Flood (48°)
			25 Elliptic -

HC 4W 350 DC mA	Cct	lm S - D	Optic
Steel/Alu 81224	M 2700	490 - 186	15 Spot (20°)
	W 3000	490 - 186	30 Flood (25°)
	N 4000	529 - 201	60 Flood (37°)

DL 4W DC 350 mA	Cct	lm S - D	Optic
Steel/Alu 81225	M 2700	490 - 193	15 Spot (22°)
	W 3000	490 - 193	30 Flood (30°)
	N 4000	529 - 208	60 W.Flood (55°)

Electronics

89421	99183	83100
ON/OFF 1 art. p 65 x l 74 x h 27	ON/OFF 2 - 3 art. p 80 x l 100 x h 31	DALI 1 - 4 art. p 54 x l 121 x h 26

C.V. - 5W DC 24 V DC	Cct	lm S - D	Optic
Steel/Alu 81226	M 2700	490 - 270	15 Spot (22°)
	W 3000	490 - 270	30 Flood (29°)
	N 4000	529 - 292	60 W.Flood (48°)
			25 Elliptic -

HC C.V. - 5W DC 24 V DC	Cct	lm S - D	Optic
Steel/Alu 81227	M 2700	490 - 186	15 Spot (20°)
	W 3000	490 - 186	30 Flood (25°)
	N 4000	529 - 201	60 Flood (37°)

DL C.V. - 5W DC 24 V DC	Cct	lm S - D	Optic
Steel/Alu 81228	M 2700	490 - 193	15 Spot (22°)
	W 3000	490 - 193	30 Flood (30°)
	N 4000	529 - 208	60 W.Flood (55°)

Electronics


89488	89179	89359	99332	99722
ON/OFF 1 - 2 art. p 80 x l 100 x h 31	ON/OFF 1 - 4 art. p 92 x l 117 x h 38	ON/OFF 1 - 9 art. p 115 x l 140 x h 50	0/1-10V 1 - 29 art. p 150 x l 60 x h 35	DALI 1 - 23 art. p 191 x l 63 x h 38



C.V. version with
converter integrated
in the cable

Recessed casing Pag. 8

Orma_CJ | Downlight | powerLED



C.C. - 4W DC 350 mA	Cct	lm S - D	Optic
Steel/Alu 81241	M 2700	490 - 270	15 Spot (22°)
	W 3000	490 - 270	30 Flood (29°)
	N 4000	529 - 292	60 W.Flood (49°)


Electronics

89421	99183	83100
ON/OFF 1 art. p 65 x l 74 x h 27	ON/OFF 2 - 3 art. p 80 x l 100 x h 31	DALI 1 - 4 art. p 54 x l 121 x h 26

C.V. - 5W DC 24 V DC	Cct	lm S - D	Optic
Steel/Alu 81242	M 2700	490 - 270	15 Spot (22°)
	W 3000	490 - 270	30 Flood (29°)
	N 4000	529 - 292	60 W.Flood (49°)

Electronics


89488	89179	89359	99332	99722
ON/OFF 1 - 2 art. p 80 x l 100 x h 31	ON/OFF 1 - 4 art. p 92 x l 117 x h 38	ON/OFF 1 - 9 art. p 115 x l 140 x h 50	0/1-10V 1 - 29 art. p 150 x l 60 x h 35	DALI 1 - 23 art. p 191 x l 63 x h 38

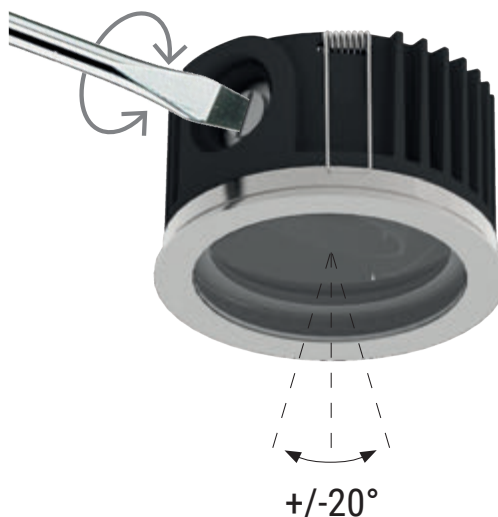

C.V. version with
converter integrated
in the cable

Recessed casing Pag. 8

Orma_C | Downlight | arrayLED



86

C.C. - 8W DC 220 mA	Cct	lm S - D	Optic
Steel/Alu 81229	M 2700	1088 - 858	15 Spot (15°)
	W 3000	1088 - 894	30 Flood (31°)
	N 4000	1173 - 944	60 W.Flood (61°)

HC C.C. - 8W DC 220 mA	Cct	lm S - D	Optic
Steel/Alu 81230	M 2700	1088 - 619	15 Spot (15°)
	W 3000	1088 - 645	30 Flood (27°)
	N 4000	1173 - 681	60 W.Flood (49°)

DL C.C. - 8W DC 220 mA	Cct	lm S - D	Optic
Steel/Alu 81231	M 2700	1088 - 575	15 Spot (16°)
	W 3000	1088 - 599	30 Flood (29°)
	N 4000	1173 - 633	60 W.Flood (53°)

Electronics

99342 83154

ON/OFF 1 art.
p 80 x l 100 x h 31

DALI 1 art.
p 54 x l 121 x h 26



C.V. - 9W DC 24 V DC	Cct	lm S - D	Optic
Steel/Alu 81232	M 2700	1209 - 954	15 Spot (15°)
	W 3000	1209 - 996	30 Flood (31°)
	N 4000	1303 - 1052	60 W.Flood (61°)

HC C.V. - 9W DC 24 V DC	Cct	lm S - D	Optic
Steel/Alu 81233	M 2700	1209 - 687	15 Spot (15°)
	W 3000	1209 - 716	30 Flood (27°)
	N 4000	1303 - 756	60 W.Flood (49°)

DL C.V. - 9W DC 24 V DC	Cct	lm S - D	Optic
Steel/Alu 81234	M 2700	1209 - 639	15 Spot (16°)
	W 3000	1209 - 666	30 Flood (29°)
	N 4000	1303 - 703	60 W.Flood (53°)

Electronics

89179 89359 99331 99332 99722

ON/OFF 1 - 2 art.
p 92 x l 117 x h 38

ON/OFF 1 - 5 art.
p 115 x l 140 x h 50

ON/OFF 1 - 15 art.
p 150 x l 160 x h 35

0/1-10V 1 - 15 art.
p 150 x l 160 x h 35



DALI 1 - 12 art.
p 191 x l 163 x h 38



C.V. version with converter integrated in the lamp body

Recessed casing Pag. 8

Orma_CJ | Downlight | arrayLED



86

C.C. - 8W DC 220 mA	Cct	lm S - D	Optic
Steel/Alu 81243	M 2700	1088 - 858	15 Spot (15°)
	W 3000	1088 - 894	30 Flood (31°)
	N 4000	1173 - 944	60 W.Flood (61°)

HC C.C. - 8W DC 220 mA	Cct	lm S - D	Optic
Steel/Alu 82452	M 2700	1072 - 619	15 Spot (15°)
	W 3000	1117 - 645	30 Flood (27°)
	N 4000	1100 - 681	60 W.Flood (49°)

Electronics

99342 83154

ON/OFF 1 art.
p 80 x l 100 x h 31

DALI 1 art.
p 54 x l 121 x h 26



C.V. - 9W DC 24 V DC	Cct	lm S - D	Optic
Steel/Alu 81244	M 2700	1209 - 954	15 Spot (15°)
	W 3000	1209 - 996	30 Flood (31°)
	N 4000	1303 - 1052	60 W.Flood (61°)

HC C.V. - 9W DC 24 V DC	Cct	lm S - D	Optic
Steel/Alu 82453	M 2700	1209 - 687	15 Spot (15°)
	W 3000	1209 - 716	30 Flood (27°)
	N 4000	1303 - 756	60 W.Flood (49°)

Electronics

89179 89359 99331 99332 99722

ON/OFF 1 - 2 art.
p 92 x l 117 x h 38

ON/OFF 1 - 5 art.
p 115 x l 140 x h 50

ON/OFF 1 - 15 art.
p 150 x l 160 x h 35

0/1-10V 1 - 15 art.
p 150 x l 160 x h 35


DALI 1 - 12 art.
p 191 x l 163 x h 38



C.V. version with converter integrated in the lamp body

Recessed casing Pag. 8

Orma_C | Downlight | arrayLED



C.C. - 12W DC 350 mA	Cct	lm S - D	Optic
Steel/Alu 81235	M 2700	1724 - 1379	15 Spot (14°)
	W 3000	1724 - 1379	30 Flood (31°)
	N 4000	1854 - 1485	60 W.Flood (61°)

HC C.C. - 12W DC 350 mA	Cct	lm S - D	Optic
Steel/Alu 81236	M 2700	1724 - 981	15 Spot (13°)
	W 3000	1724 - 981	30 Flood (28°)
	N 4000	1854 - 1055	60 W.Flood (49°)

DL C.C. - 12W DC 350 mA	Cct	lm S - D	Optic
Steel/Alu 81237	M 2700	1724 - 1094	15 Spot (14°)
	W 3000	1724 - 1094	30 Flood (29°)
	N 4000	1854 - 1178	60 W.Flood (52°)

Electronics

99183	83100
ON/OFF 1 art. p 80 x l 100 x h 31	DALI 1 art. p 54 x l 121 x h 26

C.V. - 13 W DC 24 V DC	Cct	lm S - D	Optic
Steel/Alu 81238	M 2700	1724 - 1379	15 Spot (14°)
	W 3000	1724 - 1379	30 Flood (31°)
	N 4000	1854 - 1485	60 W.Flood (61°)

HC C.V. - 13 W DC 24 V DC	Cct	lm S - D	Optic
Steel/Alu 81239	M 2700	1724 - 981	15 Spot (13°)
	W 3000	1724 - 981	30 Flood (28°)
	N 4000	1854 - 1055	60 W.Flood (49°)

DL C.V. - 13 W DC 24 V DC	Cct	lm S - D	Optic
Steel/Alu 81240	M 2700	1724 - 1094	15 Spot (14°)
	W 3000	1724 - 1094	30 Flood (29°)
	N 4000	1854 - 1178	60 W.Flood (52°)

Electronics

89179	89359	99331	99332	99722
ON/OFF 1 art. p 92 x l 117 x h 38	ON/OFF 1 - 3 art. p 115 x l 140 x h 50	ON/OFF 1 - 10 art. p 150 x l 160 x h 35	0/1-10V 1 - 10 art. p 150 x l 160 x h 35	DALI 1 - 8 art. p 191 x l 63 x h 38



C.V. version with converter integrated in the lamp body



Recessed casing Pag. 8

Recessed casing



description
99749 Recessed light casing (to be completed with universal grille 99750)
suitable for: Orma_C / Orma_CJ

Orma_CJ | Downlight | arrayLED



C.C. - 12W DC 350 mA	Cct	lm S - D	Optic
Steel/Alu 81245	M 2700	1724 - 1317	15 Spot (22°)
	W 3000	1724 - 1317	30 Flood (33°)
	N 4000	1854 - 1417	60 W.Flood (61°)

HC C.C. - 12W DC 350 mA	Cct	lm S - D	Optic
Steel/Alu 82454	M 2700	1724 - 935	15 Spot (20°)
	W 3000	1724 - 935	30 Flood (27°)
	N 4000	1854 - 1005	60 W.Flood (48°)

Electronics

99183	83100
ON/OFF 1 art. p 80 x l 100 x h 31	DALI 1 art. p 54 x l 121 x h 26

C.V. - 13 W DC 24 V DC	Cct	lm S - D	Optic
Steel/Alu 81246	M 2700	1724 - 1317	15 Spot (22°)
	W 3000	1724 - 1317	30 Flood (33°)
	N 4000	1854v1417	60 W.Flood (61°)

HC C.V. - 13 W DC 24 V DC	Cct	lm S - D	Optic
Steel/Alu 82455	M 2700	1724 - 935	15 Spot (20°)
	W 3000	1724 - 935	30 Flood (27°)
	N 4000	1854 - 1005	60 W.Flood (48°)

Electronics

89179	89359	99331	99332	99722
ON/OFF 1 art. p 92 x l 117 x h 38	ON/OFF 1 - 3 art. p 115 x l 140 x h 50	ON/OFF 1 - 10 art. p 150 x l 160 x h 35	0/1-10V 1 - 10 art. p 150 x l 160 x h 35	DALI 1 - 8 art. p 191 x l 63 x h 38

C.V. version with converter integrated in the lamp body

Recessed casing Pag. 8



description
99750 Universal grille for recessed light casing 99749
suitable for: Orma_C / Orma_CJ






orma

Materials

Aluminium body

AISI 316L stainless steel flange

Orma_AM | Up-Light | powerLED



C.C. - 4W DC 350 mA	Cct	lm S - D	Optic
Steel/Alu 83631	M 2700	490 - 129	07 Asymm. -
	W 3000	490 - 129	
	N 4000	529 - 139	

Electronics

89421	99183	83100
ON/OFF 1 art. p 65 x l 74 x h 27	ON/OFF 2 - 3 art. p 80 x l 100 x h 31	DALI 1 - 4 art. p 54 x l 121 x h 26


C.V. 24 V - 5W DC	Cct	lm S - D	Optic
Steel/Alu 83633	M 2700	490 - 129	07 Asymm. -
	W 3000	490 - 129	
	N 4000	529 - 139	

Electronics

89488	89179	89359	99332	99722
ON/OFF 1 - 2 art. p 80 x l 100 x h 31	ON/OFF 1 - 4 art. p 92 x l 117 x h 38	ON/OFF 1 - 9 art. p 115 x l 140 x h 50	0/1-10V 1 - 29 art. p 150 x l 60 x h 35	DALI 1 - 23 art. p 191 x l 63 x h 38

Recessed casing Pag. 13

Orma_AM | Up-Light | arrayLED



C.C. - 12W DC 350 mA	Cct	lm S - D	Optic
Steel/Alu 83639	M 2700	1724 - 597	07 Asymm. -
	W 3000	1724 - 597	
	N 4000	1854 - 642	

Electronics

99183	83100
ON/OFF 1 art. p 80 x l 100 x h 31	DALI 1 art. p 54 x l 121 x h 26


C.V. 24 V - 13W DC	Cct	lm S - D	Optic
Steel/Alu 83641	M 2700	1724 - 597	07 Asymm. -
	W 3000	1724 - 597	
	N 4000	1854 - 642	

Electronics

89179	89359	99331	99332	99722
ON/OFF 1 art. p 92 x l 117 x h 38	ON/OFF 1 - 3 art. p 115 x l 140 x h 50	ON/OFF 1 - 10 art. p 150 x l 60 x h 35	0/1-10V 1 - 10 art. p 150 x l 60 x h 35	DALI 1 - 8 art. p 191 x l 63 x h 38

Recessed casing Pag. 13

Orma_AM | Up-Light | arrayLED



C.C. - 8W DC 220 mA	Cct	lm S - D	Optic
Steel/Alu 83635	M 2700	1088 - 300	07 Asymm. -
	W 3000	1088 - 312	
	N 4000	1173 - 330	

Electronics

99342	83154
ON/OFF 1 art. p 80 x l 100 x h 31	DALI 1 art. p 54 x l 121 x h 26


C.V. 24 V - 9W DC	Cct	lm S - D	Optic
Steel/Alu 83637	M 2700	1209 - 333	07 Asymm. -
	W 3000	1209 - 347	
	N 4000	1303 - 366	

Electronics

89179	89359	99331	99332	99722
ON/OFF 1 - 2 art. p 92 x l 117 x h 38	ON/OFF 1 - 5 art. p 115 x l 140 x h 50	ON/OFF 1 - 15 art. p 150 x l 60 x h 35	0/1-10V 1 - 15 art. p 150 x l 60 x h 35	DALI 1 - 12 art. p 191 x l 63 x h 38

Recessed casing Pag. 13

Orma_IM | Up-Light | powerLED



C.C. 4W DC 350 mA	Cct	lm S - D	Optic
Steel Alu 83630	M 2700	490 - 129	07 Asymm. -
	W 3000	490 - 129	
	N 4000	529 - 139	

Electronics

89421	99183	83100
ON/OFF 1 art. p 65 x l 74 x h 27	ON/OFF 2 - 3 art. p 80 x l 100 x h 31	DALI 1 - 4 art. p 54 x l 121 x h 26


C.V. 24 V - 5W DC	Cct	lm S - D	Optic
Steel Alu 83632	M 2700	490 - 129	07 Asymm. -
	W 3000	490 - 129	
	N 4000	529 - 139	

Electronics

89488	89179	89359	99332	99722
ON/OFF 1 - 2 art. p 80 x l 100 x h 31	ON/OFF 1 - 4 art. p 92 x l 117 x h 38	ON/OFF 1 - 9 art. p 115 x l 140 x h 50	0/1-10V 1 - 29 art. p 150 x l 60 x h 35	DALI 1 - 23 art. p 191 x l 63 x h 38

Recessed casing Pag. 13

Orma_IM | Up-Light | arrayLED



C.C. - 12W DC 350 mA	Cct	lm S - D	Optic
Steel Alu 83638	M 2700	1724 - 597	07 Asymm. -
	W 3000	1724 - 597	
	N 4000	1854 - 642	

Electronics

99183	83100
ON/OFF 1 art. p 80 x l 100 x h 31	DALI 1 art. p 54 x l 121 x h 26


C.V. 24 V - 13W DC	Cct	lm S - D	Optic
Steel Alu 83640	M 2700	1724 - 597	07 Asymm. -
	W 3000	1724 - 597	
	N 4000	1854 - 642	

Electronics

89179	89359	99331	99332	99722
ON/OFF 1 art. p 92 x l 117 x h 38	ON/OFF 1 - 3 art. p 115 x l 140 x h 50	ON/OFF 1 - 10 art. p 150 x l 60 x h 35	0/1-10V 1 - 10 art. p 150 x l 60 x h 35	DALI 1 - 8 art. p 191 x l 63 x h 38

Recessed casing Pag. 13

Orma_IM | Up-Light | arrayLED



C.C. - 8W DC 220 mA	Cct	lm S - D	Optic
Steel Alu 83634	M 2700	1088 - 300	07 Asymm. -
	W 3000	1088 - 312	
	N 4000	1173 - 330	

Electronics

99342	83154
ON/OFF 1 art. p 80 x l 100 x h 31	DALI 1 art. p 54 x l 121 x h 26


C.V. 24 V - 9W DC	Cct	lm S - D	Optic
Steel Alu 83636	M 2700	1209 - 333	07 Asymm. -
	W 3000	1209 - 347	
	N 4000	1303 - 366	

Electronics

89179	89359	99331	99332	99722
ON/OFF 1 - 2 art. p 92 x l 117 x h 38	ON/OFF 1 - 5 art. p 115 x l 140 x h 50	ON/OFF 1 - 15 art. p 150 x l 60 x h 35	0/1-10V 1 - 15 art. p 150 x l 60 x h 35	DALI 1 - 12 art. p 191 x l 63 x h 38

Recessed casing Pag. 13

Recessed casing



description	type
99650 Recessed casings	PVC
suitable for: Orma_AM 4W / Orma_AM 5W / Orma_IM 4W / Orma_IM 5W	



description	type
99651 Recessed casings	PVC
suitable for: Orma_AM 8W / Orma_AM 9W / Orma_IM 8W / Orma_IM 9W	



description	type
99652 Recessed casings	PVC
suitable for: Orma_AM 12W / Orma_AM 13W / Orma_IM 12W / Orma_IM 13W	



description	type
99560 Recessed casings	PVC
suitable for: Orma_AM 4W / Orma_AM 5W	



description	type
99563 Recessed casings	PVC
suitable for: Orma_AM 8W / Orma_AM 9W	




description	type
99564 Recessed casings	PVC
suitable for: Orma_AM 12W / Orma_AM 13W	



description	type
99855 Recessed casings	PVC
suitable for: Orma_AM 4W / Orma_AM 5W	






description	type
99856 Recessed casings	PVC
suitable for: Orma_AM 8W / Orma_AM 9W	



description	type
99857 Recessed casings	PVC
suitable for: Orma_AM 12W / Orma_AM 13W	

Half Moon Optics

Optics conceived for wall and floor recessed installation, they allow the creation of perfectly marked and visible luminous paths. The particular Moon optics allow the luminous cone to be sectioned in favour of high visual comfort and to be easily directed so that the positioning is not restricted in the installation phase.

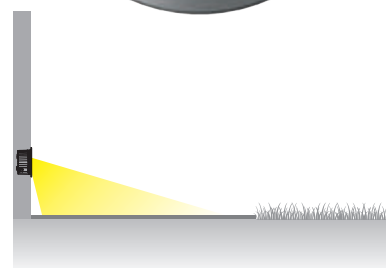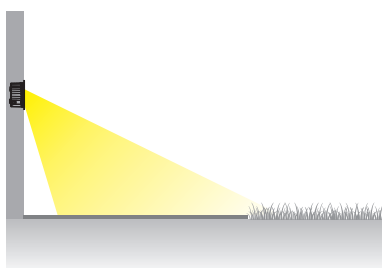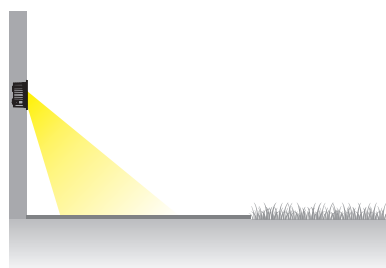

Thanks to the tilting system built into the optics compartment, Orma Half Moon is able to adapt to different installation heights, defining the diffusion of the light up to 3 metres away from the source.

orma

Materials

Aluminium body


AISI 316L stainless steel flange

Extra-clear tempered glass diffuser






orma range

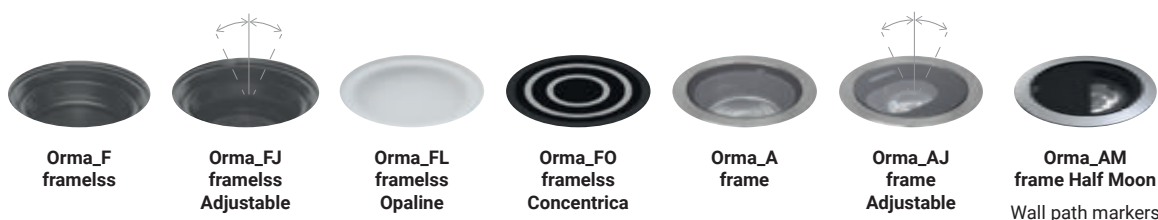

	Orma_F framelss	Orma_FJ framelss Adjustable	Orma_FL framelss Opaline	Orma_FO framelss Concentrica	Orma_A frame	Orma_AJ frame Adjustable	Orma_AM frame Half Moon Wall path markers
Ø22,5	1W CC 1,5W CV	-	1W CC 1,5W CV	-	-	-	-
Ø42	-	-	-	1,5W CV	-	-	-
Ø54 - Ø56	4W CC 5W CV	4W CC 5W CV	1W CC 1,5W CV	1W CC 1,5W CV	4W CC 5W CV	4W CC 5W CV	4W CC 5W CV
Ø64	-	-	-	-	-	-	-
Ø85 - Ø87	8W CC 9W CV	8W CC 9W CV	2W CC 2,5W CV	2W CC 2,5W CV	8W CC - 9W CV 8W RGBW	8W CC 9W CV	8W CC 9W CV
Ø97	-	-	-	-	-	-	-
Ø125 - Ø127	12W CC 13W CV	12W CC 13W CV	4W CC 5W CV	4W CC 5W CV	12W CC 13W CV	12W CC 13W CV	12W CC 13W CV
Ø138	-	-	-	-	-	-	-
Accessories	HC DL	HC	-	-	HC DL	HC	-
Finish	Glass Alu	Glass Alu	Glass Alu	Black White Grey	Steel Alu	Steel Alu	Steel Alu
CRI 80	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K RGBW	2700K 3000K 4000K	2700K 3000K 4000K
Optic	Spot Flood Wide Flood	Spot Flood Wide Flood	General	General	Spot Flood Wide Flood General Elliptic	Spot Flood Wide Flood	Asymm.

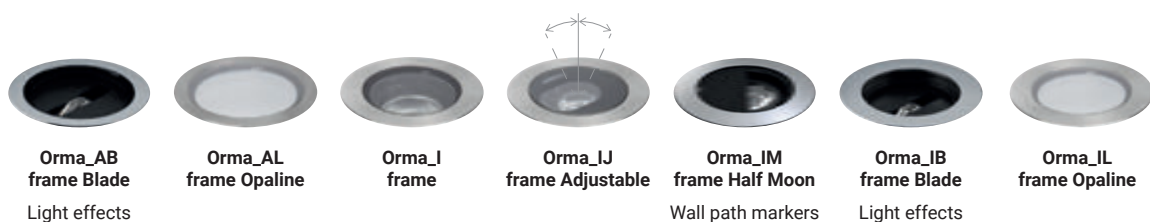

Ø22,5	-	-	-	-	-	-	-
Ø42	-	-	-	-	-	-	-
Ø54 - Ø56	-	1W CC 1,5W CV	-	-	-	-	-
Ø64	-	-	4W CC 5W CV	4W CC 5W CV	4W CC 5W CV	-	1W CC 1,5W CV
Ø85 - Ø87	8W CC 9W CV	2W CC 2,5W CV	-	-	-	-	-
Ø97	-	-	8W CC - 9W CV 8W RGBW	8W CC 9W CV	8W CC 9W CV	8W CC 9W CV	2W CC 2,5W CV
Ø125 - Ø127	-	4W CC 4,5W CV	-	-	-	-	-
Ø138	-	-	12W CC 13W CV	12W CC 13W CV	12W CC 13W CV	-	4W CC 5W CV
Accessories	-	-	HC DL	HC	-	-	-
Finish	Steel Alu	Steel Alu	Steel Alu	Steel Alu Brass Alu	Steel Alu	Steel Alu	Steel Alu
CRI 80	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K RGBW	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K
Optic	E.W.Flood	General	Spot Flood Wide Flood General Elliptic	Spot Flood Wide Flood	Asymm.	E.W.Flood	General

Vast range

Orma is a complete recess-mounted family with compact sizes, and sturdy, reliable materials with high grades of protection: temporary IK10 and IP68, ideal for tight installation spaces.

In addition to the embossed steel flange, the range is enriched by the new Brass finish. The recess-mounted steel flange is completed by the brand new version with an all-glass front flush with the floor and a path-marker with concentric optics.





The swinging versions can also be easily and quickly directed using a flat screwdriver on the specific screw, without having to open the lamp body and consequently taking the risk of compromising the waterproof seal. Orma was conceived with a unique application versatility which provides the designer with a vast range of possible shapes, finish and optics combinations. Flush, all-glass or in metal, Orma can adapt to any setting, even the most unusual one, thanks to the possibility of choosing from no less than 8 diameters and an innovative square-shaped flange. On a technical lighting level, new optics packages are introduced: Spot, Flood, Wide Flood, Extra Wide Flood, General, Elliptic, asymmetrical swing with Half Moon optics.



Blade Optics


The Blade optics let you light windows, arches and architraves, emphasising the architecture and its details. The entirely recess-mounted structure lets the window open and close without interference.

The light beam is very narrow laterally and then opens up to almost 180° at the front, enhancing the inner face of the openings without glare or light pollution.

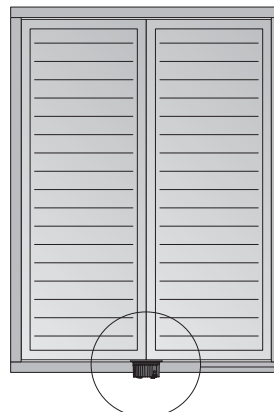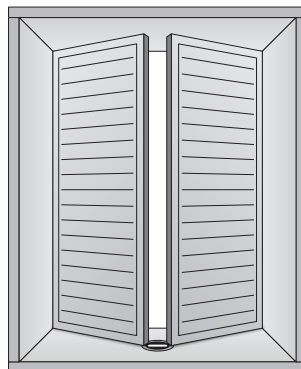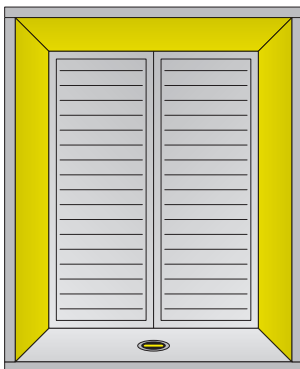


Concentric Optics

An exclusive design, recess-mounted path marker, flush with the pavement, it is capable of creating beautiful effects and giving the paths correct directionality with a sturdy structure capable of withstanding traffic weighing up to 2000 kg. The family includes four diameters: 42 mm, 56 mm, 87 mm, 127 mm and 5 power versions: 1 W, 1,5 W, 2 W, 2,5 W, 4 W, 5 W. A diverse and vast range available to professionals and their creativity.

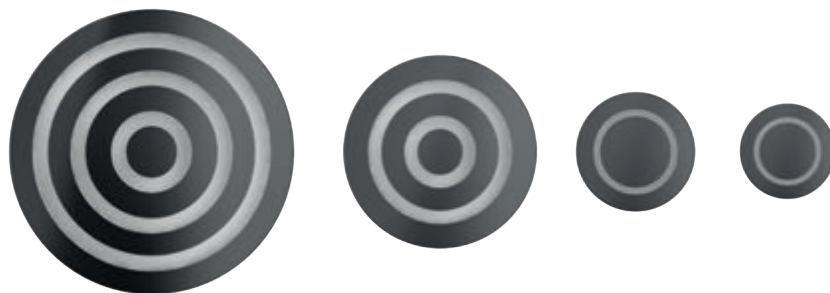


Half Moon Optics


Optics conceived for wall and floor recessed installation, they allow the creation of perfectly marked and visible luminous paths. The particular Moon optics allow the luminous cone to be sectioned in favour of high visual comfort and to be easily directed so that the positioning is not restricted in the installation phase.

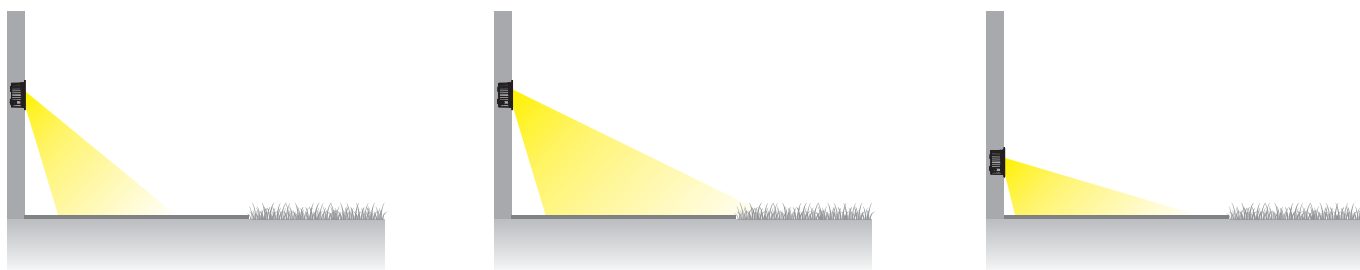

Thanks to the tilting system built into the optics compartment, Orma Half Moon is able to adapt to different installation heights, defining the diffusion of the light up to 3 metres away from the source.

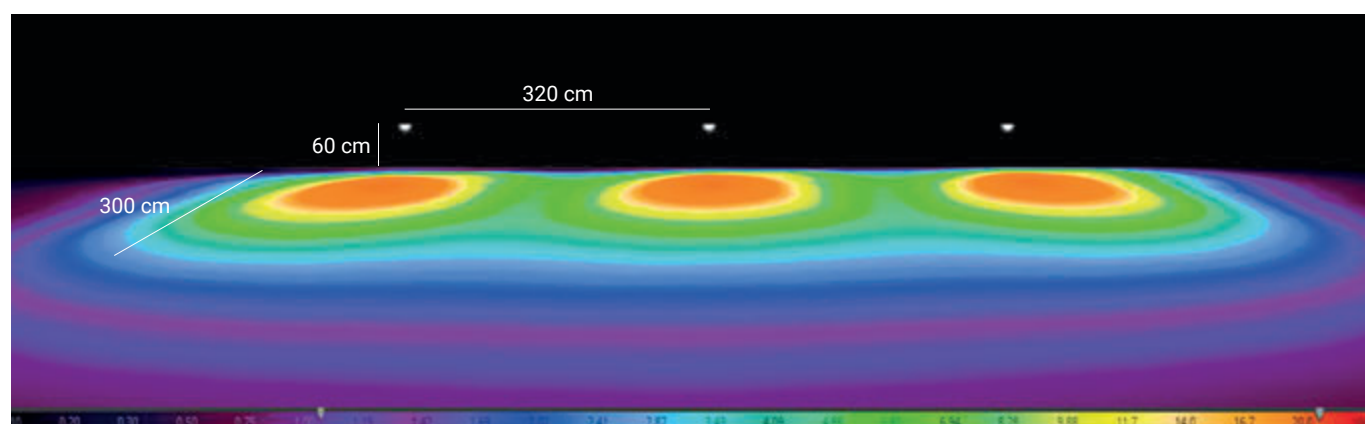

Orma_F | Up-Light | powerLED




C.C. 1W DC - 350mA	Cct	Im S - D	Optic
82697	M 2700	136 - 71	20 Flood (26°)
	W 3000	145 - 75	35 W.Flood (45°)
	N 4000	155 - 81	

Electronics

89419	89421	99183	83100
ON/OFF 1 - 2 art. p 65 x l 74 x h 27	ON/OFF 3 - 6 art. p 65 x l 74 x h 27	ON/OFF 6 - 12 art. p 80 x l 100 x h 31	DALI 1 - 14 art. p 54 x l 121 x h 26

Recessed casing Pag. 40/41

Orma_F | Up-Light | powerLED



C.C. 4W DC - 350mA	Cct	Im S - D	Optic
82657	M 2700	490 - 287	15 Spot (16°)
82658	W 3000	490 - 287	30 Flood (30°)
82659	N 4000	529 - 309	60 W.Flood (55°)

Electronics

89421	99183	83100
ON/OFF 1 art. p 65 x l 74 x h 27	ON/OFF 2 - 3 art. p 80 x l 100 x h 31	DALI 1 - 4 art. p 54 x l 121 x h 26


C.V. 5W DC - 24 V DC	Cct	Im S - D	Optic
82660	M 2700	490 - 287	15 Spot (16°)
82661	W 3000	490 - 287	30 Flood (30°)
82662	N 4000	529 - 309	60 W.Flood (55°)

Electronics

89488	89179	89359	99332	99722
ON/OFF 1 - 2 art. p 80 x l 100 x h 31	ON/OFF 1 - 4 art. p 92 x l 117 x h 38	ON/OFF 1 - 9 art. p 115 x l 140 x h 50	0/1-10V 1 - 29 art. p 150 x l 60 x h 35	DALI 1 - 23 art. p 191 x l 63 x h 38

Recessed casing Pag. 40/41

Orma_F | Up-Light | powerLED




C.V. 1,5W DC - 24 V DC	Cct	Im S - D	Optic
82698	M 2700	136 - 71	20 Flood (26°)
	W 3000	145 - 75	35 W.Flood (45°)
	N 4000	155 - 81	

Electronics

89488	89179	89359	99332	99722
ON/OFF 1 - 9 art. p 80 x l 100 x h 31	ON/OFF 1 - 15 art. p 92 x l 117 x h 38	ON/OFF 1 - 30 art. p 115 x l 140 x h 50	0/1-10V 1 - 98 art. p 150 x l 60 x h 35	DALI 1 - 78 art. p 191 x l 63 x h 38

Recessed casing Pag. 40/41

Orma_F | Up-Light | ArrayLED



C.C. 8W DC - 220mA	Cct	Im S - D	Optic
82669	M 2700	1088 - 689	15 Spot (17°)
C.C. 8W DC - 220mA HC	W 3000	1088 - 718	30 Flood (30°)
82670	N 4000	1173 - 758	60 W.Flood (60°)
C.C. 8W DC - 220mA DL			
82671			

Electronics

99342 **83154**

ON/OFF 1 art. p 80 x l 100 x h 31
DALI 1 art. p 54 x l 121 x h 26

C.V. 9W DC - 24 V DC	Cct	Im S - D	Optic
82672	M 2700	1209 - 689	15 Spot (17°)
C.V. 9W DC - 24 V DC HC	W 3000	1209 - 718	30 Flood (30°)
82673	N 4000	1303 - 758	60 W.Flood (60°)
C.V. 9W DC - 24 V DC DL			
82674			


Electronics

89179 **89359** **99331** **99332** **99722**

ON/OFF 1 - 2 art. p 92 x l 117 x h 38
ON/OFF 1 - 5 art. p 115 x l 140 x h 50
ON/OFF 1 - 15 art. p 150 x l 160 x h 35
0/1-10V 1 - 15 art. p 150 x l 160 x h 35
DALI 1 - 12 art. p 191 x l 63 x h 38

Recessed casing Pag. 40/41

Orma_F | Up-Light | ArrayLED



C.C. 12W - 350mA	Cct	Im S - D	Optic
82683	M 2700	1724 - 1365	15 Spot (12°)
C.C. 12W - 350mA HC	W 3000	1724 - 1365	30 Flood (31°)
82684	N 4000	1854 - 1466	60 W.Flood (57°)
C.C. 12W - 350mA DL			
82685			

Electronics

99183 **83100**

ON/OFF 1 art. p 80 x l 100 x h 31
DALI 1 art. p 54 x l 121 x h 26

C.V. 13W DC - 24 V DC	Cct	Im S - D	Optic
82686	M 2700	1724 - 1365	15 Spot (12°)
C.V. 13W DC - 24 V DC HC	W 3000	1724 - 1365	30 Flood (31°)
82687	N 4000	1854 - 1466	60 W.Flood (57°)
C.V. 13W DC - 24 V DC DL			
82688			



Electronics

89179 **89359** **99331** **99332** **99722**

ON/OFF 1 art. p 92 x l 117 x h 38
ON/OFF 1 - 3 art. p 115 x l 140 x h 50
ON/OFF 1 - 10 art. p 150 x l 160 x h 35
0/1-10V 1 - 10 art. p 150 x l 160 x h 35
DALI 1 - 8 art. p 191 x l 63 x h 38

Recessed casing Pag. 40/41

Orma_FJ | Up-Light | powerLED



C.C. 4W DC - 350mA	Cct	lm S - D	Optic
Glass /Alu 82663	M 2700	490 - 287	15 Spot (16°)
	W 3000	490 - 287	30 Flood (30°)
	N 4000	529 - 309	60 W.Flood (55°)

Electronics

89421	99183	83100
ON/OFF 1 art. p 65 x l 74 x h 27	ON/OFF 2 - 3 art. p 80 x l 100 x h 31	DALI 1 - 4 art. p 54 x l 121 x h 26


C.V. 5W DC - 24 V DC	Cct	lm S - D	Optic
Glass /Alu 82664	M 2700	490 - 287	15 Spot (16°)
	W 3000	490 - 287	30 Flood (30°)
	N 4000	529 - 309	60 W.Flood (55°)

Electronics

89488	89179	89359	99332	99722
ON/OFF 1 - 2 art. p 80 x l 100 x h 31	ON/OFF 1 - 4 art. p 92 x l 117 x h 38	ON/OFF 1 - 9 art. p 115 x l 140 x h 50	0/1-10V 1 - 29 art. p 150 x l 60 x h 35	DALI 1 - 23 art. p 191 x l 63 x h 38

Recessed casing Pag. 40/41

Orma_FJ | Up-Light | ArrayLED



C.C. 8W DC - 220mA	Cct	lm S - D	Optic
Glass /Alu 82675	M 2700	1088 - 689	15 Spot (17°)
C.C. 8W DC - 220mA HC	W 3000	1088 - 718	30 Flood (30°)
Glass /Alu 82676	N 4000	1173 - 758	60 W.Flood (60°)

Electronics


99342	83154
ON/OFF 1 art. p 80 x l 100 x h 31	DALI 1 art. p 54 x l 121 x h 26

C.V. 9W DC - 24 V DC	Cct	lm S - D	Optic
Glass /Alu 82677	M 2700	1209 - 689	15 Spot (17°)
C.V. 9W DC - 24 V DC HC	W 3000	1209 - 718	30 Flood (30°)
Glass /Alu 82678	N 4000	1303 - 758	60 W.Flood (60°)

Electronics

89179	89359	99331	99332	99722
ON/OFF 1 - 2 art. p 92 x l 117 x h 38	ON/OFF 1 - 5 art. p 115 x l 140 x h 50	ON/OFF 1 - 15 art. p 150 x l 60 x h 35	0/1-10V 1 - 15 art. p 150 x l 60 x h 35	DALI 1 - 12 art. p 191 x l 63 x h 38

Recessed casing Pag. 40/41



C.C. 12W DC - 350mA	Cct	lm S - D	Optic
Glass /Alu 82689	M 2700	1724 - 1202	15 Spot (22°)
C.C. 12W DC - 350mA HC	W 3000	1724 - 1202	30 Flood (30°)
Glass /Alu 82690	N 4000	1854 - 1292	60 W.Flood (58°)

Electronics

99183	83100
ON/OFF 1 art. p 80 x l 100 x h 31	DALI 1 art. p 54 x l 121 x h 26


C.V. 13W DC - 24 V DC	Cct	lm S - D	Optic
Glass /Alu 82691	M 2700	1724 - 1202	15 Spot (22°)
C.V. 13W DC - 24 V DC HC	W 3000	1724 - 1202	30 Flood (30°)
Glass /Alu 82692	N 4000	1854 - 1292	60 W.Flood (58°)

Electronics

89179	89359	99331	99332	99722
ON/OFF 1 art. p 92 x l 117 x h 38	ON/OFF 1 - 3 art. p 115 x l 140 x h 50	ON/OFF 1 - 10 art. p 150 x l 60 x h 35	0/1-10V 1 - 10 art. p 150 x l 60 x h 35	DALI 1 - 8 art. p 191 x l 63 x h 38

Recessed casing Pag. 40/41

Orma_FL | Up-Light | powerLED




C.C. 1W DC - 350mA	Cct	lm S - D	Optic
Glass Alu 82699	M 2700	136 - 12	00 General -
	W 3000	145 - 13	
	N 4000	155 - 14	

Electronics

89419	89421	99183	83100
ON/OFF 1 - 2 art. p 65 x l 74 x h 27	ON/OFF 3 - 6 art. p 65 x l 74 x h 27	ON/OFF 6 - 12 art. p 80 x l 100 x h 31	DALI 1 - 14 art. p 54 x l 121 x h 26

Recessed casing Pag. 40/41

Orma_FL | Path-Marker | powerLED



C.C. 1W DC - 350mA	Cct	lm S - D	Optic
Glass Alu 82667	M 2700	136 - 8	00 General -
	W 3000	145 - 8	
	N 4000	155 - 8	

Electronics

89419	89421	99183	83100
ON/OFF 1 - 2 art. p 65 x l 74 x h 27	ON/OFF 3 - 6 art. p 65 x l 74 x h 27	ON/OFF 6 - 12 art. p 80 x l 100 x h 31	DALI 1 - 14 art. p 54 x l 121 x h 26


C.V. 1,5W DC - 24 V DC	Cct	lm S - D	Optic
Glass Alu 82668	M 2700	136 - 8	00 General -
	W 3000	145 - 8	
	N 4000	155 - 8	

Electronics

89488	89179	89359	99332	99722
ON/OFF 1 - 9 art. p 80 x l 100 x h 31	ON/OFF 1 - 15 art. p 92 x l 117 x h 38	ON/OFF 1 - 30 art. p 115 x l 140 x h 50	0/1-10V 1 - 98 art. p 150 x l 60 x h 35	DALI 1 - 78 art. p 191 x l 63 x h 38

Recessed casing Pag. 40/41

Orma_FL | Up-Light | powerLED




C.V. 1,5W DC - 24 V DC	Cct	lm S - D	Optic
Glass Alu 82700	M 2700	136 - 12	00 General -
	W 3000	145 - 13	
	N 4000	155 - 14	

Electronics

89488	89179	89359	99332	99722
ON/OFF 1 - 9 art. p 80 x l 100 x h 31	ON/OFF 1 - 15 art. p 92 x l 117 x h 38	ON/OFF 1 - 30 art. p 115 x l 140 x h 50	0/1-10V 1 - 98 art. p 150 x l 60 x h 35	DALI 1 - 78 art. p 191 x l 63 x h 38

Recessed casing Pag. 40/41

Orma_FL | Path-Marker | powerLED



C.C. 2W DC- 630mA	Cct	lm S - D	Optic
Glass /Alu 82681	M 2700	249 - 14	00 General -
	W 3000	266 - 15	
	N 4000	284 - 15	

Electronics

89420	99179	99186	83102
ON/OFF 1 - 2 art. p 65 x l 74 x h 27	ON/OFF 3 - 6 art. p 80 x l 100 x h 31	ON/OFF 6 - 12 art. p 92 x l 117 x h 38	DALI 1 - 14 art. p 54 x l 121 x h 26


C.V. 2,5W DC - 24 V DC	Cct	lm S - D	Optic
Glass /Alu 82682	M 2700	249 - 14	00 General -
	W 3000	266 - 15	
	N 4000	284 - 15	

Electronics

89488	89179	89359	99332	99722
ON/OFF 1 - 5 art. p 80 x l 100 x h 31	ON/OFF 1 - 9 art. p 92 x l 117 x h 38	ON/OFF 1 - 18 art. p 115 x l 140 x h 50	0/1-10V 1 - 56 art. p 150 x l 60 x h 35	DALI 1 - 45 art. p 191 x l 63 x h 38

Recessed casing Pag. 40/41

Orma_FL | Path-Marker | powerLED



C.C. 4W DC - 350mA	Cct	lm S - D	Optic
Glass /Alu 82695	M 2700	490 - 50	00 General -
	W 3000	490 - 50	
	N 4000	529 - 54	

Electronics

89421	99183	83100
ON/OFF 1 art. p 65 x l 74 x h 27	ON/OFF 2 - 3 art. p 80 x l 100 x h 31	DALI 1 - 4 art. p 54 x l 121 x h 26


C.V. 5W DC - 24 V DC	Cct	lm S - D	Optic
Glass /Alu 82696	M 2700	490 - 50	00 General -
	W 3000	490 - 50	
	N 4000	529 - 54	

Electronics

89488	89179	89359	99332	99722
ON/OFF 1 - 2 art. p 80 x l 100 x h 31	ON/OFF 1 - 4 art. p 92 x l 117 x h 38	ON/OFF 1 - 9 art. p 115 x l 140 x h 50	0/1-10V 1 - 29 art. p 150 x l 60 x h 35	DALI 1 - 23 art. p 191 x l 63 x h 38

Recessed casing Pag. 40/41

Orma_FO | Drive-over spotlights | 24 V DC | topLED 1,5 W DC



	Cct	Im S - D	Optic
White 95474	M 2700	54 - On req	00 General -
Black 95475	W 3000	60 - On req	
Grey 95476	N 4000	63 - On req	



Electronics

89488	89179	89359	99332	99722
ON/OFF 1 - 9 art. p 80 x l 100 x h 31	ON/OFF 1 - 15 art. p 92 x l 117 x h 38	ON/OFF 1 - 30 art. p 115 x l 140 x h 50	0/1-10V 1 - 98 art. p 150 x l 60 x h 35	DALI 1 - 78 art. p 191 x l 63 x h 38

RTG 95474W00 / 95475W00

Recessed casing Pag. 40/41

Orma_FO | Up-Light | powerLED



C.C. 2W DC - 630mA	Cct	Im S - D	Optic
Black 82679	M 2700	249 - 12	00 General -
	W 3000	266 - 13	
	N 4000	284 - 13	

Electronics

89420	99179	99186	83102
ON/OFF 1 - 2 art. p 65 x l 74 x h 27	ON/OFF 3 - 6 art. p 80 x l 100 x h 31	ON/OFF 6 - 12 art. p 92 x l 117 x h 38	DALI 1 - 14 art. p 54 x l 121 x h 26


C.V. 2,5W DC - 24 V DC	Cct	Im S - D	Optic
Black 82680	M 2700	249 - 12	00 General -
	W 3000	266 - 13	
	N 4000	284 - 13	

Electronics

89488	89179	89359	99332	99722
ON/OFF 1 - 5 art. p 80 x l 100 x h 31	ON/OFF 1 - 9 art. p 92 x l 117 x h 38	ON/OFF 1 - 18 art. p 115 x l 140 x h 50	0/1-10V 1 - 56 art. p 150 x l 60 x h 35	DALI 1 - 45 art. p 191 x l 63 x h 38

Recessed casing Pag. 40/41

Orma_FO | Up-Light | powerLED



C.C. 1W DC - 350mA	Cct	Im S - D	Optic
Black 82665	M 2700	136 - 6	00 General -
	W 3000	145 - 6	
	N 4000	155 - 7	

Electronics

89419	89421	99183	83100
ON/OFF 1 - 2 art. p 65 x l 74 x h 27	ON/OFF 3 - 6 art. p 80 x l 100 x h 31	ON/OFF 6 - 12 art. p 92 x l 117 x h 38	DALI 1 - 14 art. p 54 x l 121 x h 26



C.V. 1,5W DC - 24 V DC	Cct	Im S - D	Optic
Black 82666	M 2700	136 - 6	00 General -
	W 3000	145 - 6	
	N 4000	155 - 7	

Electronics

89488	89179	89359	99332	99722
ON/OFF 1 - 9 art. p 80 x l 100 x h 31	ON/OFF 1 - 15 art. p 92 x l 117 x h 38	ON/OFF 1 - 30 art. p 115 x l 140 x h 50	0/1-10V 1 - 98 art. p 150 x l 60 x h 35	DALI 1 - 78 art. p 191 x l 63 x h 38

Recessed casing Pag. 40/41

Orma_FO | Up-Light | powerLED



C.C. 4W DC - 350mA	Cct	Im S - D	Optic
Black 82693	M 2700	490 - 34	00 General -
	W 3000	490 - 34	
	N 4000	529 - 37	

Electronics

89421	99183	83100
ON/OFF 1 art. p 65 x l 74 x h 27	ON/OFF 2 - 3 art. p 80 x l 100 x h 31	DALI 1 - 4 art. p 54 x l 121 x h 26

C.V. 5W DC - 24 V DC	Cct	Im S - D	Optic
Black 82694	M 2700	490 - 34	00 General -
	W 3000	490 - 34	
	N 4000	529 - 37	


Electronics

89488	89179	89359	99332	99722
ON/OFF 1 - 2 art. p 80 x l 100 x h 31	ON/OFF 1 - 4 art. p 92 x l 117 x h 38	ON/OFF 1 - 9 art. p 115 x l 140 x h 50	0/1-10V 1 - 29 art. p 150 x l 60 x h 35	DALI 1 - 23 art. p 191 x l 63 x h 38

Recessed casing Pag. 40/41



Orma_A | Up-Light | powerLED



C.C. 4W DC - 350mA	Cct	lm S - D	Optic
Steel Alu 81181	M 2700	490 - 270	15 Spot (22°)
	W 3000	490 - 270	30 Flood (29°)
	N 4000	529 - 292	60 W.Flood (49°)
			25 Elliptic -

	HC	Cct	lm S - D	Optic
SteelAlu 81182	M	2700	490 - 186	15 Spot (20°)
	W	3000	490 - 186	30 Flood (25°)
	N	4000	529 - 201	60 Flood (37°)

		DL	Cct	lm S - D	Optic
SteelAlu	81183	M	2700	490 - 193	15 Spot (22°)
		W	3000	490 - 193	30 Flood (30°)
		N	4000	529 - 208	60 W.Flood (55°)

Electronics

89421	99183	83100
ON/OFF 1 art. p 65 x l 74 x h 27	ON/OFF 2 - 3 art. p 80 x l 100 x h 31	DALI 1 - 4 art. p 54 x l 121 x h 26

C.V. 5W DC - 24 V DC	Cct	lm S - D	Optic
Steel Alu 81184	M 2700	490 - 270	15 Spot (22°)
	W 3000	490 - 270	30 Flood (29°)
	N 4000	529 - 292	60 W.Flood (49°)
			25 Elliptic -

		HC	Cct	lm S - D	Optic
SteelAlu	81185	M	2700	490 - 186	15 Spot (20°)
		W	3000	490 - 186	30 Flood (25°)
		N	4000	529 - 201	60 Flood (37°)


		DL	Cct	lm S - D	Optic	
SteelAlu	81186	M	2700	490 - 193	15	Spot (22°)
		W	3000	490 - 193	30	Flood (30°)
		N	4000	529 - 208	60	W.Flood (55°)

Electronics

89488	89179	89359	99332	99722
ON/OFF 1 - 2 art. p 80 x l 100 x h 31	ON/OFF 1 - 4 art. p 92 x l 117 x h 38	ON/OFF 1 - 9 art. p 115 x l 140 x h 50	0/1-10V 1 - 29 art. p 150 x l 160 x h 35	DALI 1 - 23 art. p 191 x l 163 x h 38

Recessed casing Pag. 40/41

Orma_A | Up-Light | arrayLED



C.C. - 8W DC - 220 mA	Cct	lm S - D	Optic
Steel Alu 81187	M 2700	1088 - 858	15 Spot (15°)
	W 3000	1088 - 894	30 Flood (31°)
	N 4000	1173 - 944	60 W.Flood (61°)

		HC	Cct	lm S - D	Optic
SteelAlu	81188	M	2700	1088 - 619	15 Spot (15°)
		W	3000	1088 - 645	30 Flood (27°)
		N	4000	1173 - 681	60 W.Flood (49°)

		DL	Cct	lm S - D	Optic
SteelAlu	81189	M	2700	1088 - 575	15 Spot (16°)
		W	3000	1088 - 599	30 Flood (29°)
		N	4000	1173 - 633	60 W.Flood (53°)

Electronics

99342	83154
ON/OFF 1 art. p 80 x l 100 x h 31	DALI 1 art. p 54 x l 121 x h 26

C.V. 9W DC - 24 V DC	Cct	lm S - D	Optic
Steel Alu 81190	M 2700	1209 - 954	15 Spot (15°)
	W 3000	1209 - 996	30 Flood (31°)
	N 4000	1303 - 1052	60 W.Flood (61°)

		HC	Cct	lm S - D	Optic
Steel	Alu	81191	M 2700	1209 - 687	15 Spot (15°)
			W 3000	1209 - 716	30 Flood (27°)
			N 4000	1303 - 756	60 W.Flood (49°)

		DL	Cct	lm S - D	Optic
SteelAlu	81192	M	2700	1209 - 639	15 Spot (16°)
		W	3000	1209 - 666	30 Flood (29°)
		N	4000	1303 - 703	60 W.Flood (53°)

Electronics

89179	89359	99331	99332	99722
ON/OFF 1 - 2 art. p 92 x l 117 x h 38	ON/OFF 1 - 5 art. p 115 x l 140 x h 50	ON/OFF 1 - 15 art. p 150 x l 160 x h 35	0/1-10V 1 - 15 art. p 150 x l 160 x h 35	DALI 1 - 12 art. p 191 x l 163 x h 38


RGBW - 8W DC - 630 mA	Cct	Optic
Steel Alu 81322	Q RGBW natural white	06 N.Spot -
	V RGBW warm white	15 Spot -
		45 W.Flood -
		00 General -

Electronics

99743+99702	99333	DMX	Driver	Switching
Dimmer RF 1 - 12 art.	Dimmer DMX 2 - 12 art.	DMX Controllers CV 24V/48V Pag. 952 - 953	Driver CV 48V Pag. 941	Switching CV 48V Pag. 932

Recessed casing Pag. 40/41

Orma_A | Up-Light | arrayLED



C.C. 12W DC - 350mA

Steel/Alu	81193	Cct	lm S - D	Optic
		M 2700	1724 - 1379	15 Spot (14°)
		W 3000	1724 - 1379	30 Flood (31°)
		N 4000	1854 - 1485	60 W.Flood (61°)

HC

Steel/Alu	81194	Cct	lm S - D	Optic
		M 2700	1724 - 981	15 Spot (14°)
		W 3000	1724 - 981	30 Flood (28°)
		N 4000	1854 - 1055	60 W.Flood (49°)

DL

Steel/Alu	81195	Cct	lm S - D	Optic
		M 2700	1724 - 1094	15 Spot (14°)
		W 3000	1724 - 1094	30 Flood (30°)
		N 4000	1854 - 1178	60 W.Flood (52°)

Electronics

99183 **83100**

ON/OFF DALI
1 art. 1 art.
p 80 x l 100 x h 31 p 54 x l 121 x h 26

C.V. 13W DC - 24 V DC

Steel/Alu	81196	Cct	lm S - D	Optic
		M 2700	1724 - 1379	15 Spot (14°)
		W 3000	1724 - 1379	30 Flood (31°)
		N 4000	1854 - 1485	60 W.Flood (60°)

HC

Steel/Alu	81197	Cct	lm S - D	Optic
		M 2700	1724 - 981	15 Spot (14°)
		W 3000	1724 - 981	30 Flood (28°)
		N 4000	1854 - 1055	60 W.Flood (49°)

DL

Steel/Alu	81198	Cct	lm S - D	Optic
		M 2700	1724 - 1094	15 Spot (14°)
		W 3000	1724 - 1094	30 Flood (30°)
		N 4000	1854 - 1178	60 W.Flood (52°)


Electronics

89179 **89359** **99331** **99332** **99722**

ON/OFF ON/OFF ON/OFF 0/1-10V DALI
1 art. 1 - 3 art. 1 - 10 art. 1 - 10 art. 1 - 8 art.
p 92 x l 117 x h 38 p 115 x l 140 x h 50 p 150 x l 60 x h 35 p 150 x l 60 x h 35 p 191 x l 63 x h 38

Recessed casing Pag. 40/41

Orma_AJ | Up-Light | powerLED



C.C. 4W DC - 350mA	Cct	lm S - D	Optic
Steel Alu 81205	M 2700	490 - 270	15 Spot (22°)
	W 3000	490 - 270	30 Flood (29°)
	N 4000	529 - 292	60 W.Flood (49°)

Electronics

89421	99183	83100
ON/OFF 1 art. p 65 x l 74 x h 27	ON/OFF 2 - 3 art. p 80 x l 100 x h 31	DALI 1 - 4 art. p 54 x l 121 x h 26


C.V. 5W DC - 24 V DC	Cct	lm S - D	Optic
Steel Alu 81206	M 2700	490 - 270	15 Spot (22°)
	W 3000	490 - 270	30 Flood (29°)
	N 4000	529 - 292	60 W.Flood (49°)

Electronics

89488	89179	89359	99332	99722
ON/OFF 1 - 2 art. p 80 x l 100 x h 31	ON/OFF 1 - 4 art. p 92 x l 117 x h 38	ON/OFF 1 - 9 art. p 115 x l 140 x h 50	0/1-10V 1 - 29 art. p 150 x l 160 x h 35	DALI 1 - 23 art. p 191 x l 163 x h 38

Recessed casing Pag. 40/41

Orma_AJ | Up-Light | arrayLED



C.C. - 8W DC - 220 mA	Cct	lm S - D	Optic
Steel Alu 81207	M 2700	1088 - 858	15 Spot (15°)
	W 3000	1088 - 894	30 Flood (32°)
	N 4000	1173 - 944	60 W.Flood (61°)

C.C. - 8W DC - 220 mA HC

Cct	lm S - D	Optic
M 2700	1088 - 619	15 Spot (15°)
W 3000	1088 - 645	30 Flood (27°)
N 4000	1173 - 681	60 W.Flood (49°)

Electronics

99342	83154
ON/OFF 1 art. p 80 x l 100 x h 31	DALI 1 art. p 54 x l 121 x h 26

C.V. 9W DC - 24 V DC	Cct	lm S - D	Optic
Steel Alu 81208	M 2700	1209 - 954	15 Spot (15°)
	W 3000	1209 - 996	30 Flood (32°)
	N 4000	1303 - 1052	60 W.Flood (61°)


C.V. 9W DC - 24 V DC HC

Cct	lm S - D	Optic
M 2700	1209 - 687	15 Spot (15°)
W 3000	1209 - 716	30 Flood (32°)
N 4000	1303 - 756	60 W.Flood (61°)

Electronics

89179	89359	99331	99332	99722
ON/OFF 1 - 2 art. p 92 x l 117 x h 38	ON/OFF 1 - 5 art. p 115 x l 140 x h 50	ON/OFF 1 - 15 art. p 150 x l 160 x h 35	0/1-10V 1 - 15 art. p 150 x l 160 x h 35	DALI 1 - 12 art. p 191 x l 163 x h 38

Recessed casing Pag. 40/41

**C.C. - 12W DC - 350 mA**

	Cct	Im S - D	Optic
Steel/Alu 81209	M 2700	1724 - 1317	15 Spot (22°)
	W 3000	1724 - 1317	30 Flood (34°)
	N 4000	1854 - 1417	60 W.Flood (61°)

C.C. - 12W DC - 350 mA HC

	Cct	Im S - D	Optic
Steel/Alu 82462	M 2700	1724 - 935	15 Spot (20°)
	W 3000	1724 - 935	30 Flood (27°)
	N 4000	1854 - 1005	60 W.Flood (48°)

Electronics

99183 83100

ON/OFF DALI
1 art. 1 art.
p 80 x l 100 x h 31 p 54 x l 121 x h 26

C.V. 13W DC - 24 V DC

	Cct	Im S - D	Optic
Steel/Alu 81210	M 2700	1724 - 1317	15 Spot (22°)
	W 3000	1724 - 1317	30 Flood (34°)
	N 4000	1854 - 1417	60 W.Flood (61°)

C.V. 13W DC - 24 V DC HC


	Cct	Im S - D	Optic
Steel/Alu 82463	M 2700	1724 - 935	15 Spot (20°)
	W 3000	1724 - 935	30 Flood (27°)
	N 4000	1854 - 1005	60 W.Flood (48°)

Electronics

89179 89359 99331 99332 99722

ON/OFF ON/OFF ON/OFF 0/1-10V DALI
1 art. 1 - 3 art. 1 - 10 art. 1 - 10 art. 1 - 8 art.
p 92 x l 117 x h 38 p 115 x l 140 x h 50 p 150 x l 60 x h 35 p 150 x l 60 x h 35 p 191 x l 63 x h 38

Recessed casing Pag. 40/41



C.C. 1W DC - 350mA	Cct	lm S - D	Optic
Steel/Alu 81217	M 2700	136 - 16	00 General -
	W 3000	145 - 18	
	N 4000	155 - 19	

Electronics


89419	89421	99183	83100
ON/OFF 1 - 2 art. p 65 x l 74 x h 27	ON/OFF 3 - 6 art. p 65 x l 74 x h 27	ON/OFF 6 - 12 art. p 80 x l 100 x h 31	DALI 1 - 14 art. p 54 x l 121 x h 26

C.V. 1,5W DC - 24 V DC	Cct	lm S - D	Optic
Steel/Alu 81218	M 2700	136 - 16	00 General -
	W 3000	145 - 18	
	N 4000	155 - 19	

Electronics

89488	89179	89359	99332	99722
ON/OFF 1 - 9 art. p 80 x l 100 x h 31	ON/OFF 1 - 15 art. p 92 x l 117 x h 38	ON/OFF 1 - 30 art. p 115 x l 140 x h 50	0/1-10V 1 - 98 art. p 150 x l 160 x h 35	DALI 1 - 78 art. p 191 x l 163 x h 38

Recessed casing Pag. 40/41



C.C. 2W DC - 630 mA	Cct	lm S - D	Optic
Steel/Alu 81219	M 2700	249 - 24	00 General -
	W 3000	266 - 26	
	N 4000	284 - 28	

Electronics


89420	99179	99186	83102
ON/OFF 1 - 2 art. p 65 x l 74 x h 27	ON/OFF 3 - 6 art. p 80 x l 100 x h 31	ON/OFF 6 - 12 art. p 92 x l 117 x h 38	DALI 1 - 14 art. p 54 x l 121 x h 26

C.V. 2,5W DC - 24 V DC	Cct	lm S - D	Optic
Steel/Alu 81220	M 2700	249 - 24	00 General -
	W 3000	266 - 26	
	N 4000	284 - 28	

Electronics

89488	89179	89359	99332	99722
ON/OFF 1 - 5 art. p 80 x l 100 x h 31	ON/OFF 1 - 9 art. p 92 x l 117 x h 38	ON/OFF 1 - 18 art. p 115 x l 140 x h 50	0/1-10V 1 - 56 art. p 150 x l 160 x h 35	DALI 1 - 45 art. p 191 x l 163 x h 38

Recessed casing Pag. 40/41



C.C. 4W DC - 350mA	Cct	Im S - D	Optic
SteelAlu 81221	M 2700	490 - 89	00 General -
	W 3000	490 - 89	
	N 4000	529 - 96	

Electronics

89421	99183	83100
ON/OFF 1 art. p 65 x l 74 x h 27	ON/OFF 2 - 3 art. p 80 x l 100 x h 31	DALI 1 - 4 art. p 54 x l 121 x h 26




C.V. 4,5W DC - 24 V DC	Cct	Im S - D	Optic
SteelAlu 81222	M 2700	490 - 89	00 General -
	W 3000	490 - 89	
	N 4000	529 - 96	

Electronics

89488	89179	89359	99332	99722
ON/OFF 1 - 2 art. p 80 x l 100 x h 31	ON/OFF 1 - 4 art. p 92 x l 117 x h 38	ON/OFF 1 - 9 art. p 115 x l 140 x h 50	0/1-10V 1 - 29 art. p 150 x l 60 x h 35	DALI 1 - 23 art. p 191 x l 63 x h 38

Recessed casing Pag. 40/41

Orma_I | Up-Light | powerLED



C.C. 4W DC - 350mA	Cct	Im S - D	Optic
Steel/Alu 80582	M 2700	490 - 270	15 Spot (22°)
	W 3000	490 - 270	30 Flood (29°)
	N 4000	529 - 292	60 W.Flood (49°)
			25 Elliptic -

C.C. 4W DC - 350mA HC	Cct	Im S - D	Optic
Steel/Alu 80583	M 2700	490 - 186	15 Spot (20°)
	W 3000	490 - 186	30 Flood (25°)
	N 4000	529 - 201	60 Flood (37°)

C.C. 4W DC - 350mA DL	Cct	Im S - D	Optic
Steel/Alu 80584	M 2700	490 - 193	15 Spot (22°)
	W 3000	490 - 193	30 Flood (30°)
	N 4000	529 - 208	60 W.Flood (55°)

Electronics

89421	99183	83100
ON/OFF 1 art. p 65 x l 74 x h 27	ON/OFF 2 - 3 art. p 80 x l 100 x h 31	DALI 1 - 4 art. p 54 x l 121 x h 26

C.V. 5W DC - 24 V DC	Cct	Im S - D	Optic
Steel/Alu 80585	M 2700	490 - 270	15 Spot (22°)
	W 3000	490 - 270	30 Flood (29°)
	N 4000	529 - 292	60 W.Flood (49°)
			25 Elliptic -

C.V. 5W DC - 24 V DC HC	Cct	Im S - D	Optic
Steel/Alu 80586	M 2700	490 - 186	15 Spot (20°)
	W 3000	490 - 186	30 Flood (25°)
	N 4000	529 - 201	60 Flood (37°)



C.V. 5W DC - 24 V DC DL	Cct	Im S - D	Optic
Steel/Alu 80587	M 2700	490 - 193	15 Spot (22°)
	W 3000	490 - 193	30 Flood (30°)
	N 4000	529 - 208	60 W.Flood (55°)

Electronics

89488	89179	89359	99332	99722
ON/OFF 1 - 2 art. p 80 x l 100 x h 31	ON/OFF 1 - 4 art. p 92 x l 117 x h 38	ON/OFF 1 - 9 art. p 115 x l 140 x h 50	0/1-10V 1 - 29 art. p 150 x l 160 x h 35	DALI 1 - 23 art. p 191 x l 163 x h 38

Recessed casing Pag. 40/41

Orma_I | Up-Light | arrayLED



C.C. - 8W DC - 220 mA	Cct	Im S - D	Optic
Steel/Alu 80588	M 2700	1088 - 858	15 Spot (15°)
	W 3000	1088 - 894	30 Flood (32°)
	N 4000	1173 - 944	60 W.Flood (61°)

C.C. - 8W DC - 220 mA HC	Cct	Im S - D	Optic
Steel/Alu 80589	M 2700	1088 - 619	15 Spot (15°)
	W 3000	1088 - 645	30 Flood (27°)
	N 4000	1173 - 681	60 W.Flood (49°)

C.C. - 8W DC - 220 mA DL	Cct	Im S - D	Optic
Steel/Alu 80590	M 2700	1088 - 575	15 Spot (16°)
	W 3000	1088 - 599	30 Flood (29°)
	N 4000	1173 - 633	60 W.Flood (53°)

Electronics

99342	83154
ON/OFF 1 art. p 80 x l 100 x h 31	DALI 1 art. p 54 x l 121 x h 26

C.V. 9W DC - 24 V DC	Cct	Im S - D	Optic
Steel/Alu 81172	M 2700	1209 - 954	15 Spot (15°)
	W 3000	1209 - 996	30 Flood (32°)
	N 4000	1303 - 1052	60 W.Flood (61°)

C.V. 9W DC - 24 V DC HC	Cct	Im S - D	Optic
Steel/Alu 81173	M 2700	1209 - 687	15 Spot (15°)
	W 3000	1209 - 716	30 Flood (27°)
	N 4000	1303 - 756	60 W.Flood (49°)

C.V. 9W DC - 24 V DC DL	Cct	Im S - D	Optic
Steel/Alu 81174	M 2700	1209 - 639	15 Spot (16°)
	W 3000	1209 - 666	30 Flood (29°)
	N 4000	1303 - 703	60 W.Flood (53°)

Electronics

89179	89359	99331	99332	99722
ON/OFF 1 - 2 art. p 92 x l 117 x h 38	ON/OFF 1 - 5 art. p 115 x l 140 x h 50	ON/OFF 1 - 15 art. p 150 x l 160 x h 35	0/1-10V 1 - 15 art. p 150 x l 160 x h 35	DALI 1 - 12 art. p 191 x l 163 x h 38


RGBW - 8W DC - 630 mA	Cct	Optic
Steel/Alu 81321	Q RGBW natural white	06 N.Spot -
	V RGBW warm white	15 Spot -
		45 W.Flood -
		00 General -

Electronics

99743+99702	99333	DMX	Driver	Switching
Dimmer RF 1 - 12 art.	Dimmer DMX 2 - 12 art.	DMX Controllers CV 24V/48V Pag. 952 - 953	Driver CV 48V Pag. 941	Switching CV 48V Pag. 932

Recessed casing Pag. 40/41

Orma_I | Up-Light | arrayLED



C.C. 12W DC - 350mA	Cct	lm S - D	Optic
Steel/Alu 81175	M 2700	1724 - 1379	15 Spot (14°)
	W 3000	1724 - 1379	30 Flood (31°)
	N 4000	1854 - 1485	60 W.Flood (60°)

C.C. 12W DC - 350mA HC	Cct	lm S - D	Optic
Steel/Alu 81176	M 2700	1724 - 981	15 Spot (14°)
	W 3000	1724 - 981	30 Flood (28°)
	N 4000	1854 - 1055	60 W.Flood (49°)

C.C. 12W DC - 350mA DL	Cct	lm S - D	Optic
Steel/Alu 81177	M 2700	1724 - 1094	15 Spot (14°)
	W 3000	1724 - 1094	30 Flood (30°)
	N 4000	1854 - 1178	60 W.Flood (52°)

Electronics

99183 **83100**

ON/OFF DALI
1 art. 1 art.
p 80 x l 100 x h 31 p 54 x l 121 x h 26

C.V. 13W DC - 24 V DC	Cct	lm S - D	Optic
Steel/Alu 81178	M 2700	1724 - 1379	15 Spot (14°)
	W 3000	1724 - 1379	30 Flood (31°)
	N 4000	1854 - 1485	60 W.Flood (60°)

C.V. 13W DC - 24 V DC HC	Cct	lm S - D	Optic
Steel/Alu 81179	M 2700	1724 - 981	15 Spot (14°)
	W 3000	1724 - 981	30 Flood (28°)
	N 4000	1854 - 1055	60 W.Flood (49°)

C.V. 13W DC - 24 V DC DL	Cct	lm S - D	Optic
Steel/Alu 81180	M 2700	1724 - 1094	15 Spot (14°)
	W 3000	1724 - 1094	30 Flood (30°)
	N 4000	1854 - 1178	60 W.Flood (52°)


Electronics

89179 **89359** **99331** **99332** **99722**

ON/OFF ON/OFF ON/OFF 0/1-10V DALI
1 art. 1 - 3 art. 1 - 10 art. 1 - 10 art. 1 - 8 art.
p 92 x l 117 x h 38 p 115 x l 140 x h 50 p 150 x l 60 x h 35 p 150 x l 60 x h 35 p 191 x l 63 x h 38

Recessed casing Pag. 40/41

Orma_IJ | Up-Light | powerLED



C.C. 4W DC - 350mA	Cct	lm S - D	Optic
Steel Alu 81199	M 2700	490 - 270	15 Spot (22°)
Brass Alu 82521	W 3000	490 - 270	30 Flood (29°)
	N 4000	529 - 292	60 W.Flood (49°)

Electronics


89421	99183	83100
ON/OFF 1 art. p 65 x l 74 x h 27	ON/OFF 2 - 3 art. p 80 x l 100 x h 31	DALI 1 - 4 art. p 54 x l 121 x h 26

C.V. 5W DC - 24 V DC	Cct	lm S - D	Optic
Steel Alu 81200	M 2700	490 - 270	15 Spot (22°)
Brass Alu 82522	W 3000	490 - 270	30 Flood (29°)
	N 4000	529 - 292	60 W.Flood (49°)

Electronics

89488	89179	89359	99332	99722
ON/OFF 1 - 2 art. p 80 x l 100 x h 31	ON/OFF 1 - 4 art. p 92 x l 117 x h 38	ON/OFF 1 - 9 art. p 115 x l 140 x h 50	0/1-10V 1 - 29 art. p 150 x l 60 x h 35	DALI 1 - 23 art. p 191 x l 63 x h 38


Recessed casing Pag. 40/41

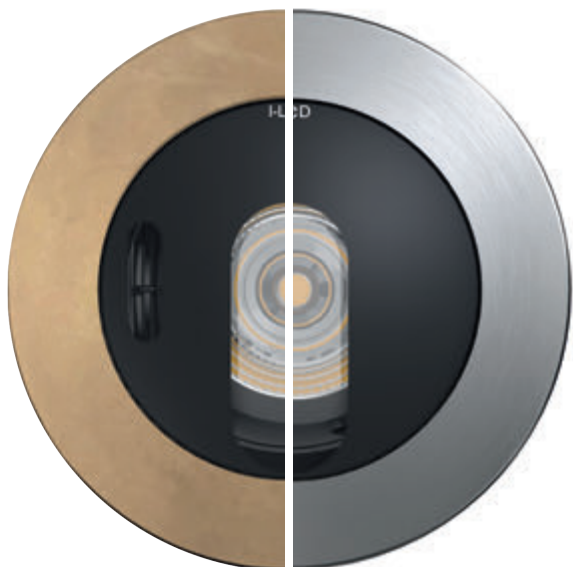

Orma_IJ Brass

Orma_IJ Steel

Orma_IJ | Up-Light | arrayLED



C.C. - 8W DC - 220mA	Cct	lm S - D	Optic
Steel Alu 81201	M 2700	1088 - 858	15 Spot (15°)
Brass Alu 82523	W 3000	1088 - 894	30 Flood (32°)
	N 4000	1173 - 944	60 W.Flood (61°)

C.C. - 8W DC - 220mA HC

Cct	lm S - D	Optic
M 2700	1088 - 619	15 Spot (15°)
W 3000	1088 - 645	30 Flood (27°)
N 4000	1173 - 681	60 W.Flood (49°)

Electronics

99342	83154
ON/OFF 1 art. p 80 x l 100 x h 31	DALI 1 art. p 54 x l 121 x h 26

C.V. 9W DC - 24 V DC	Cct	lm S - D	Optic
Steel Alu 81202	M 2700	1209 - 954	15 Spot (15°)
Brass Alu 82524	W 3000	1209 - 996	30 Flood (32°)
	N 4000	1303 - 1052	60 W.Flood (61°)


C.V. 9W DC - 24 V DC HC

Cct	lm S - D	Optic
M 2700	1209 - 687	15 Spot (15°)
W 3000	1209 - 716	30 Flood (32°)
N 4000	1303 - 756	60 W.Flood (61°)

Electronics

89179	89359	99331	99332	99722
ON/OFF 1 - 2 art. p 92 x l 117 x h 38	ON/OFF 1 - 5 art. p 115 x l 140 x h 50	ON/OFF 1 - 15 art. p 150 x l 60 x h 35	0/1-10V 1 - 15 art. p 150 x l 60 x h 35	DALI 1 - 12 art. p 191 x l 63 x h 38

Recessed casing Pag. 40/41



C.C. - 12W DC - 350mA	Cct	lm S - D	Optic
Steel/Alu 81203	M 2700	1724 - 1317	15 Spot (22°)
Brass/Alu 82525	W 3000	1724 - 1317	30 Flood (34°)
	N 4000	1854 - 1417	60 W.Flood (61°)

C.C. - 12W DC - 350mA HC	Cct	lm S - D	Optic
Steel/Alu 82458	M 2700	1724 - 935	15 Spot (20°)
	W 3000	1724 - 935	30 Flood (27°)
	N 4000	1854 - 1005	60 W.Flood (48°)

Electronics

99183 **83100**

ON/OFF DALI
1 art. 1 art.
p 80 x l 100 x h 31 p 54 x l 121 x h 26

C.V. 13W DC - 24 V DC	Cct	lm S - D	Optic
Steel/Alu 81204	M 2700	1724 - 1317	15 Spot (22°)
Brass/Alu 82526	W 3000	1724 - 1317	30 Flood (34°)
	N 4000	1854 - 1417	60 W.Flood (61°)

C.V. 13W DC - 24 V DC HC	Cct	lm S - D	Optic
Steel/Alu 82459	M 2700	1724 - 935	15 Spot (20°)
	W 3000	1724 - 935	30 Flood (27°)
	N 4000	1854 - 1005	60 W.Flood (48°)


Electronics

89179 **89359** **99331** **99332** **99722**

ON/OFF ON/OFF ON/OFF 0/1-10V DALI
1 art. 1 - 3 art. 1 - 10 art. 1 - 10 art. 1 - 8 art.
p 92 x l 117 x h 38 p 115 x l 140 x h 50 p 150 x l 60 x h 35 p 150 x l 60 x h 35 p 191 x l 63 x h 38

Recessed casing Pag. 40/41

Orma_IL | Path-Marker | powerLED



C.C. 1W DC - 350mA	Cct	lm S - D	Optic
Steel/Alu 81211	M 2700	136 - 16	00 General -
	W 3000	145 - 18	
	N 4000	155 - 19	

Electronics

89419	89421	99183	83100
ON/OFF 1 - 2 art. p 65 x l 74 x h 27	ON/OFF 3 - 6 art. p 65 x l 74 x h 27	ON/OFF 6 - 12 art. p 80 x l 100 x h 31	DALI 1 - 14 art. p 54 x l 121 x h 26



C.V. 1,5W DC - 24 V DC	Cct	lm S - D	Optic
Steel/Alu 81212	M 2700	136 - 16	00 General -
	W 3000	145 - 18	
	N 4000	155 - 19	

Electronics

89488	89179	89359	99332	99722
ON/OFF 1 - 9 art. p 80 x l 100 x h 31	ON/OFF 1 - 15 art. p 92 x l 117 x h 38	ON/OFF 1 - 30 art. p 115 x l 140 x h 50	0/1-10V 1 - 98 art. p 150 x l 60 x h 35	DALI 1 - 78 art. p 191 x l 63 x h 38

Recessed casing Pag. 40/41

Orma_IL | Path-Marker | powerLED



C.C. 2W DC - 630mA	Cct	lm S - D	Optic
Steel/Alu 81213	M 2700	249 - 24	00 General -
	W 3000	266 - 26	
	N 4000	284 - 28	

Electronics


89420	99179	99186	83102
ON/OFF 1 - 2 art. p 65 x l 74 x h 27	ON/OFF 3 - 6 art. p 80 x l 100 x h 31	ON/OFF 6 - 12 art. p 92 x l 117 x h 38	DALI 1 - 14 art. p 54 x l 121 x h 26

C.V. 2,5W DC - 24 V DC	Cct	lm S - D	Optic
Steel/Alu 81214	M 2700	249 - 24	00 General -
	W 3000	266 - 26	
	N 4000	284 - 28	

Electronics

89488	89179	89359	99332	99722
ON/OFF 1 - 5 art. p 80 x l 100 x h 31	ON/OFF 1 - 9 art. p 92 x l 117 x h 38	ON/OFF 1 - 18 art. p 115 x l 140 x h 50	0/1-10V 1 - 56 art. p 150 x l 60 x h 35	DALI 1 - 45 art. p 191 x l 63 x h 38

Recessed casing Pag. 40/41



C.C. 4W DC - 350mA	Cct	Im S - D	Optic
Steel/Alu 81215	M 2700	490 - 89	00 General -
	W 3000	490 - 89	
	N 4000	529 - 96	

Electronics

89421	99183	83100
ON/OFF 1 art. p 65 x l 74 x h 27	ON/OFF 2 - 3 art. p 80 x l 100 x h 31	DALI 1 - 4 art. p 54 x l 121 x h 26

C.V. 5W DC - 24 V DC	Cct	Im S - D	Optic
Steel/Alu 81216	M 2700	490 - 89	00 General -
	W 3000	490 - 89	
	N 4000	529 - 96	


Electronics

89488	89179	89359	99332	99722
ON/OFF 1 - 2 art. p 80 x l 100 x h 31	ON/OFF 1 - 4 art. p 92 x l 117 x h 38	ON/OFF 1 - 9 art. p 115 x l 140 x h 50	0/1-10V 1 - 29 art. p 150 x l 60 x h 35	DALI 1 - 23 art. p 191 x l 63 x h 38

Recessed casing Pag. 40/41

Recessed casing

Orma A / AJ / AL / I / IJ / IL



description	type
99650 Recessed casings	PVC

suitable for: Orma_A 4W - 5W / Orma_AJ 4W - 5W
Orma_AL 1W - 1,5W / Orma_I 4W - 5W
Orma_IJ 4W - 5W / Orma_IL 1W - 1,5W



description	type
99652 Recessed casings	PVC

suitable for: Orma_A 12W - 13W / Orma_AJ 12W - 13W
Orma_AL 4W - 4,5W / Orma_I 12W - 13W
Orma_IJ 12W - 13W / Orma_IL 4W - 5W



description	type
99651 Recessed casings	PVC

suitable for: Orma_A 8W - 9W / Orma_AJ 8W - 9W
Orma_AL 2W - 2,5W / Orma_I 8W - 9W / Orma_IJ 8W - 9W
Orma_IL 2W - 2,5W

Orma A / AJ / AL



description	type
99560 Recessed casings	PVC

suitable for: Orma_A 4W - 5W / Orma_AJ 4W - 5W
Orma_AL 1W - 1,5W



description	type
99564 Recessed casings	PVC

suitable for: Orma_A 12W - 13W / Orma_AJ 12W - 13W
Orma_AL 4W - 4,5W




description	type
99563 Recessed casings	PVC

suitable for: Orma_A 8W - 9W / Orma_AJ 8W - 9W
Orma_AL 2W - 2,5W



description	type
99855 Recessed casings	PVC

suitable for: Orma_A 4W - 5W / Orma_AJ 4W - 5W
Orma_AL 1W - 1,5W



description	type
99856 Recessed casings	PVC

suitable for: Orma_A 8W - 9W / Orma_AJ 8W - 9W
Orma_AL 2W - 2,5W



description	type
99857 Recessed casings	PVC

suitable for: Orma_A 12W - 13W / Orma_AJ 12W - 13W
Orma_AL 4W - 4,5W

Orma F / FJ / FL / FO



description	type
99925 Recessed casings	PVC

suitable for: Orma_F 1W / Orma_FL 1,5W



description	type
99922 Recessed casings	PVC

suitable for: Orma_F 4W - 5W / Orma_FJ 4W - 5W
Orma_FL 1W - 1,5W / Orma_FO 1W - 1,5W (Ø 56)




description	type
99923 Recessed casings	PVC

suitable for: Orma_F 8W - 9W / Orma_FJ 8W - 9W
Orma_FL 2W - 2,5W / Orma_FO 2W - 2,5W




description	type
99924 Recessed casings	PVC

suitable for: Orma_F 12W - 13W / Orma_FJ 12W - 13W
Orma_FL 4W - 5W / Orma_FO 4W - 5W



description	type
98292 Recessed casing	PVC

suitable for: Orma_FO 1,5W (Ø 42)




description	type
98291 Recessed casing	

suitable for: Orma_FO 1,5W (Ø 42)


Orma F / FJ / FL / FO



description	type
83036 Recessed casings	PVC
suitable for: Orma_F 1W / Orma_FL 1W	



description	type
83037 Recessed casings	PVC
suitable for: Orma_F 1,5W / Orma_FL 1,5W	



description	type
83038 Recessed casings	PVC
suitable for: Orma_F 4W - 5W / Orma_FJ 4W - 5W Orma_FL 1W - 1,5W / Orma_FO 1W - 1,5W (Ø 56)	




description	type
83039 Recessed casings	PVC
suitable for: Orma_F 8W - 9W / Orma_FJ 8W - 9W Orma_F 2W - 2,5W - Orma_FO 2W - 2,5W	



description	type
83040 Recessed casings	PVC
suitable for: Orma_F 12W - 13W / Orma_FJ 12W - 13W Orma_FL 4W - 5W / Orma_FO 4W - 5W	


INSTALLATION

Installation in a few quick steps (**Recessed casing 99563 + Orma AJ 81207W15**)

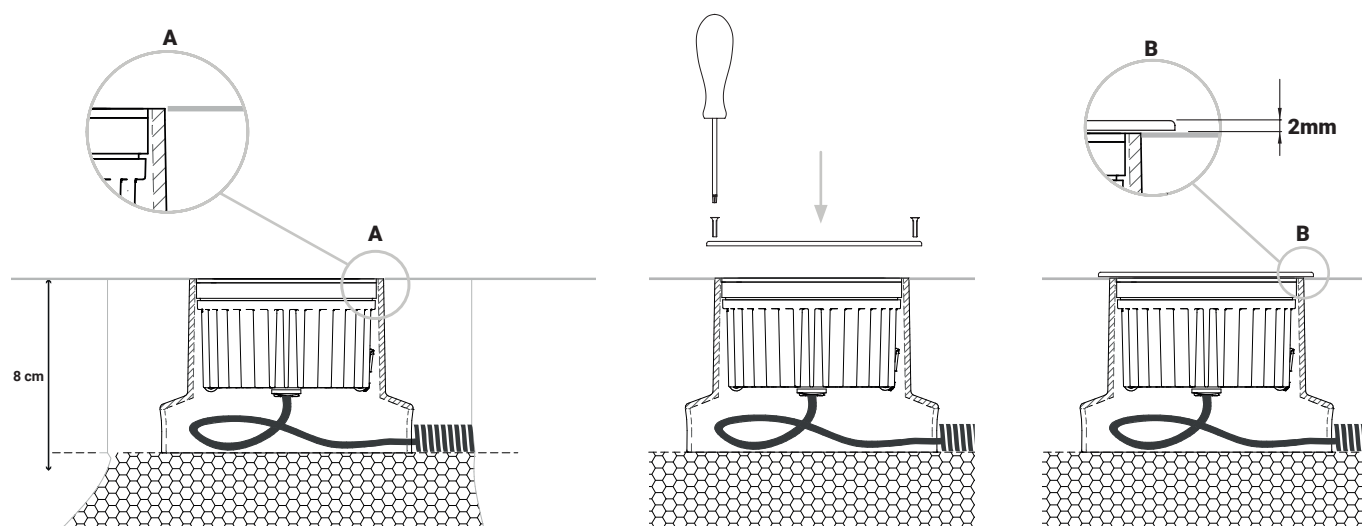

LOCKING SYSTEM

Technologically advanced outer casings that offer maximum pointing stability when using the orientable version of the equipment thanks to the special grooves that stabilise the screw and prevent rotation thereof over time.

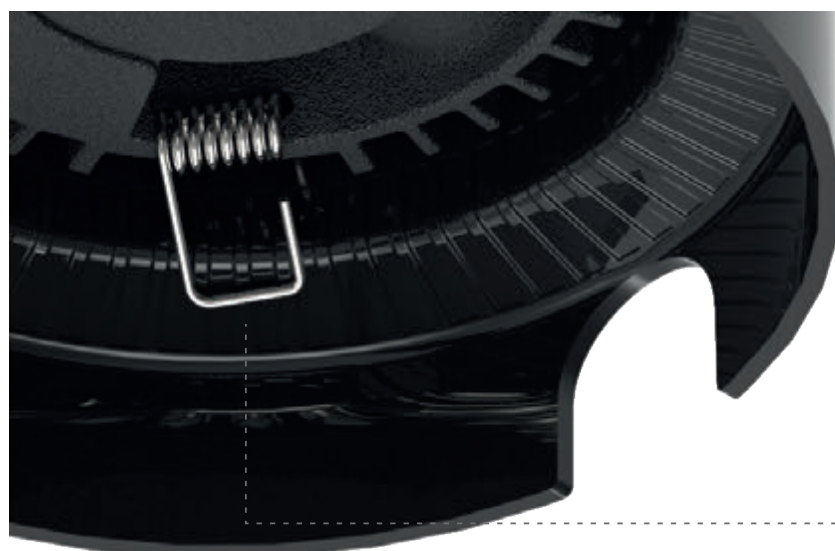

Maximum pointing stability when using the tilting version (Orma_J)



orma


Materials

Aluminium body

AISI 316L stainless steel flange



Orma_AB | Arc light | powerLED



C.C. - 8W DC 630 mA	Cct	lm S - D	Optic
Steel/Alu 83642	M 2700	854 - 217	18 W.Flood (9-64°)
	W 3000	854 - 217	
	N 4000	922 - 234	

Electronics

99179	99186	83102
ON/OFF 1 art. p 80 x l 100 x h 31	ON/OFF 2 - 3 art. p 92 x l 117 x h 38	DALI 1 - 3 art. p 53 x l 121 x h 26


C.V. 9W DC 24V DC	Cct	lm S - D	Optic
Steel/Alu 83643	M 2700	854 - 217	18 W.Flood (9-64°)
	W 3000	854 - 217	
	N 4000	922 - 234	

Electronics

89179	89359	99331	99332	99722
ON/OFF 1 - 2 art. p 92 x l 117 x h 38	ON/OFF 1 - 5 art. p 115 x l 140 x h 50	ON/OFF 1 - 15 art. p 150 x l 60 x h 35	0/1-10V 1 - 15 art. p 150 x l 60 x h 35	DALI 1 - 12 art. p 191 x l 63 x h 38

Recessed casing Pag. 43

Orma_IB | Arc light | powerLED



C.C. - 8W DC 630 mA	Cct	lm S - D	Optic
Steel/Alu 83644	M 2700	854 - 217	18 W.Flood (9-64°)
	W 3000	854 - 217	
	N 4000	922 - 234	

Electronics

99179	99186	83102
ON/OFF 1 art. p 80 x l 100 x h 31	ON/OFF 2 - 3 art. p 92 x l 117 x h 38	DALI 1 - 3 art. p 53 x l 121 x h 26

C.V. 9W DC 24V DC	Cct	lm S - D	Optic
Steel/Alu 83645	M 2700	854 - 217	18 W.Flood (9-64°)
	W 3000	854 - 217	
	N 4000	922 - 234	

Electronics

89179	89359	99331	99332	99722
ON/OFF 1 - 2 art. p 92 x l 117 x h 38	ON/OFF 1 - 5 art. p 115 x l 140 x h 50	ON/OFF 1 - 15 art. p 150 x l 60 x h 35	0/1-10V 1 - 15 art. p 150 x l 60 x h 35	DALI 1 - 12 art. p 191 x l 63 x h 38

Recessed casing Pag. 43

Recessed casing



description	type
99651 Recessed casings	PVC
suitable for: Orma_AB / Orma_IB	



description	type
99563 Recessed casings	PVC
suitable for: Orma_AB	



description	type
99856 Recessed casings	PVC
suitable for: Orma_AB	



Addresses

Linea Light HQ Italy

via della Fornace, 59 z.i.
31023 Castelmio di Resana (TV) - Italy
Phone: +39 0423 7868
Fax: +39 0423 786900
info@linealight.com

Linea Light Milano

via Morimondo, 26 int. 17G
20143 Milano - Italy
Phone: +39 02 36750915
Fax: +39 02 36750915
milano@linealight.com

Linea Light Roma

Via La Spezia, 34
00182 Roma - Italy
Phone: +39 06 68589134
info@linealightroma.com

Linea Light UK

Suite 109 - The Business Design Centre
52 Upper Street - Islington N10QH
London - UK
Phone: +44 0203 6371983
info@linealight-uk.com

Linea Light France

Z.A. Heiden Est, 12 rue des Pays-Bas
68310 Wittelsheim - France
Phone: +33 389 75 52 23
Fax: +33 389 75 59 07
info@linealight.fr

Linea Light Deutschland

Aktienstraße 214
45473 Mülheim Ruhr - Germany
Phone: +49 208 299979-0
Fax: +49 208 299979-10
service@linealight.de

Linea Light USA - Inter Lux

3741 Commerce Drive
Suites 306-308
Baltimore, MD 21227 - USA
Phone: +1 410 381 1497
Fax: +1 410 381 1589
answers@inter-lux.com

Linea Light Russia

Design Center Artplay
Nizhnyaya Syromyatnicheskaya 10/2 enter B,
3rd floor, office 14
105120 Moscow - Russia Federation
Phone: +7 495 639 9941
info@linealight.ru

Linea Light Spain

C/ Longares, 48
28022 Madrid - Spain
Phone: +34 912534773
info@linealight.es

Linea Light Singapore

21 Kaki Bukit Place, 5th Fl.
Eunos Techpark Singapore
416199 Singapore
Phone: +65-6908 5758
info.sg@linealight.com


Linea Light GCC

Jumeirah Lake Towers
JBC2 - 35th Floor Cluster V - Dubai - UAE
P.O. Box 125902
Phone: +971 4 4218275
Fax: +971 4 4218274
info@linealight.ae

Linea Light Asia - Pacific

No. 7, Nanyi Huayuan Road, Industry Avenue,
528478 Xiaolan Town, Zhongshan City,
Guangdong Province - China
Phone: +86 760 87618355
info@linealight.com.cn

linealight.com

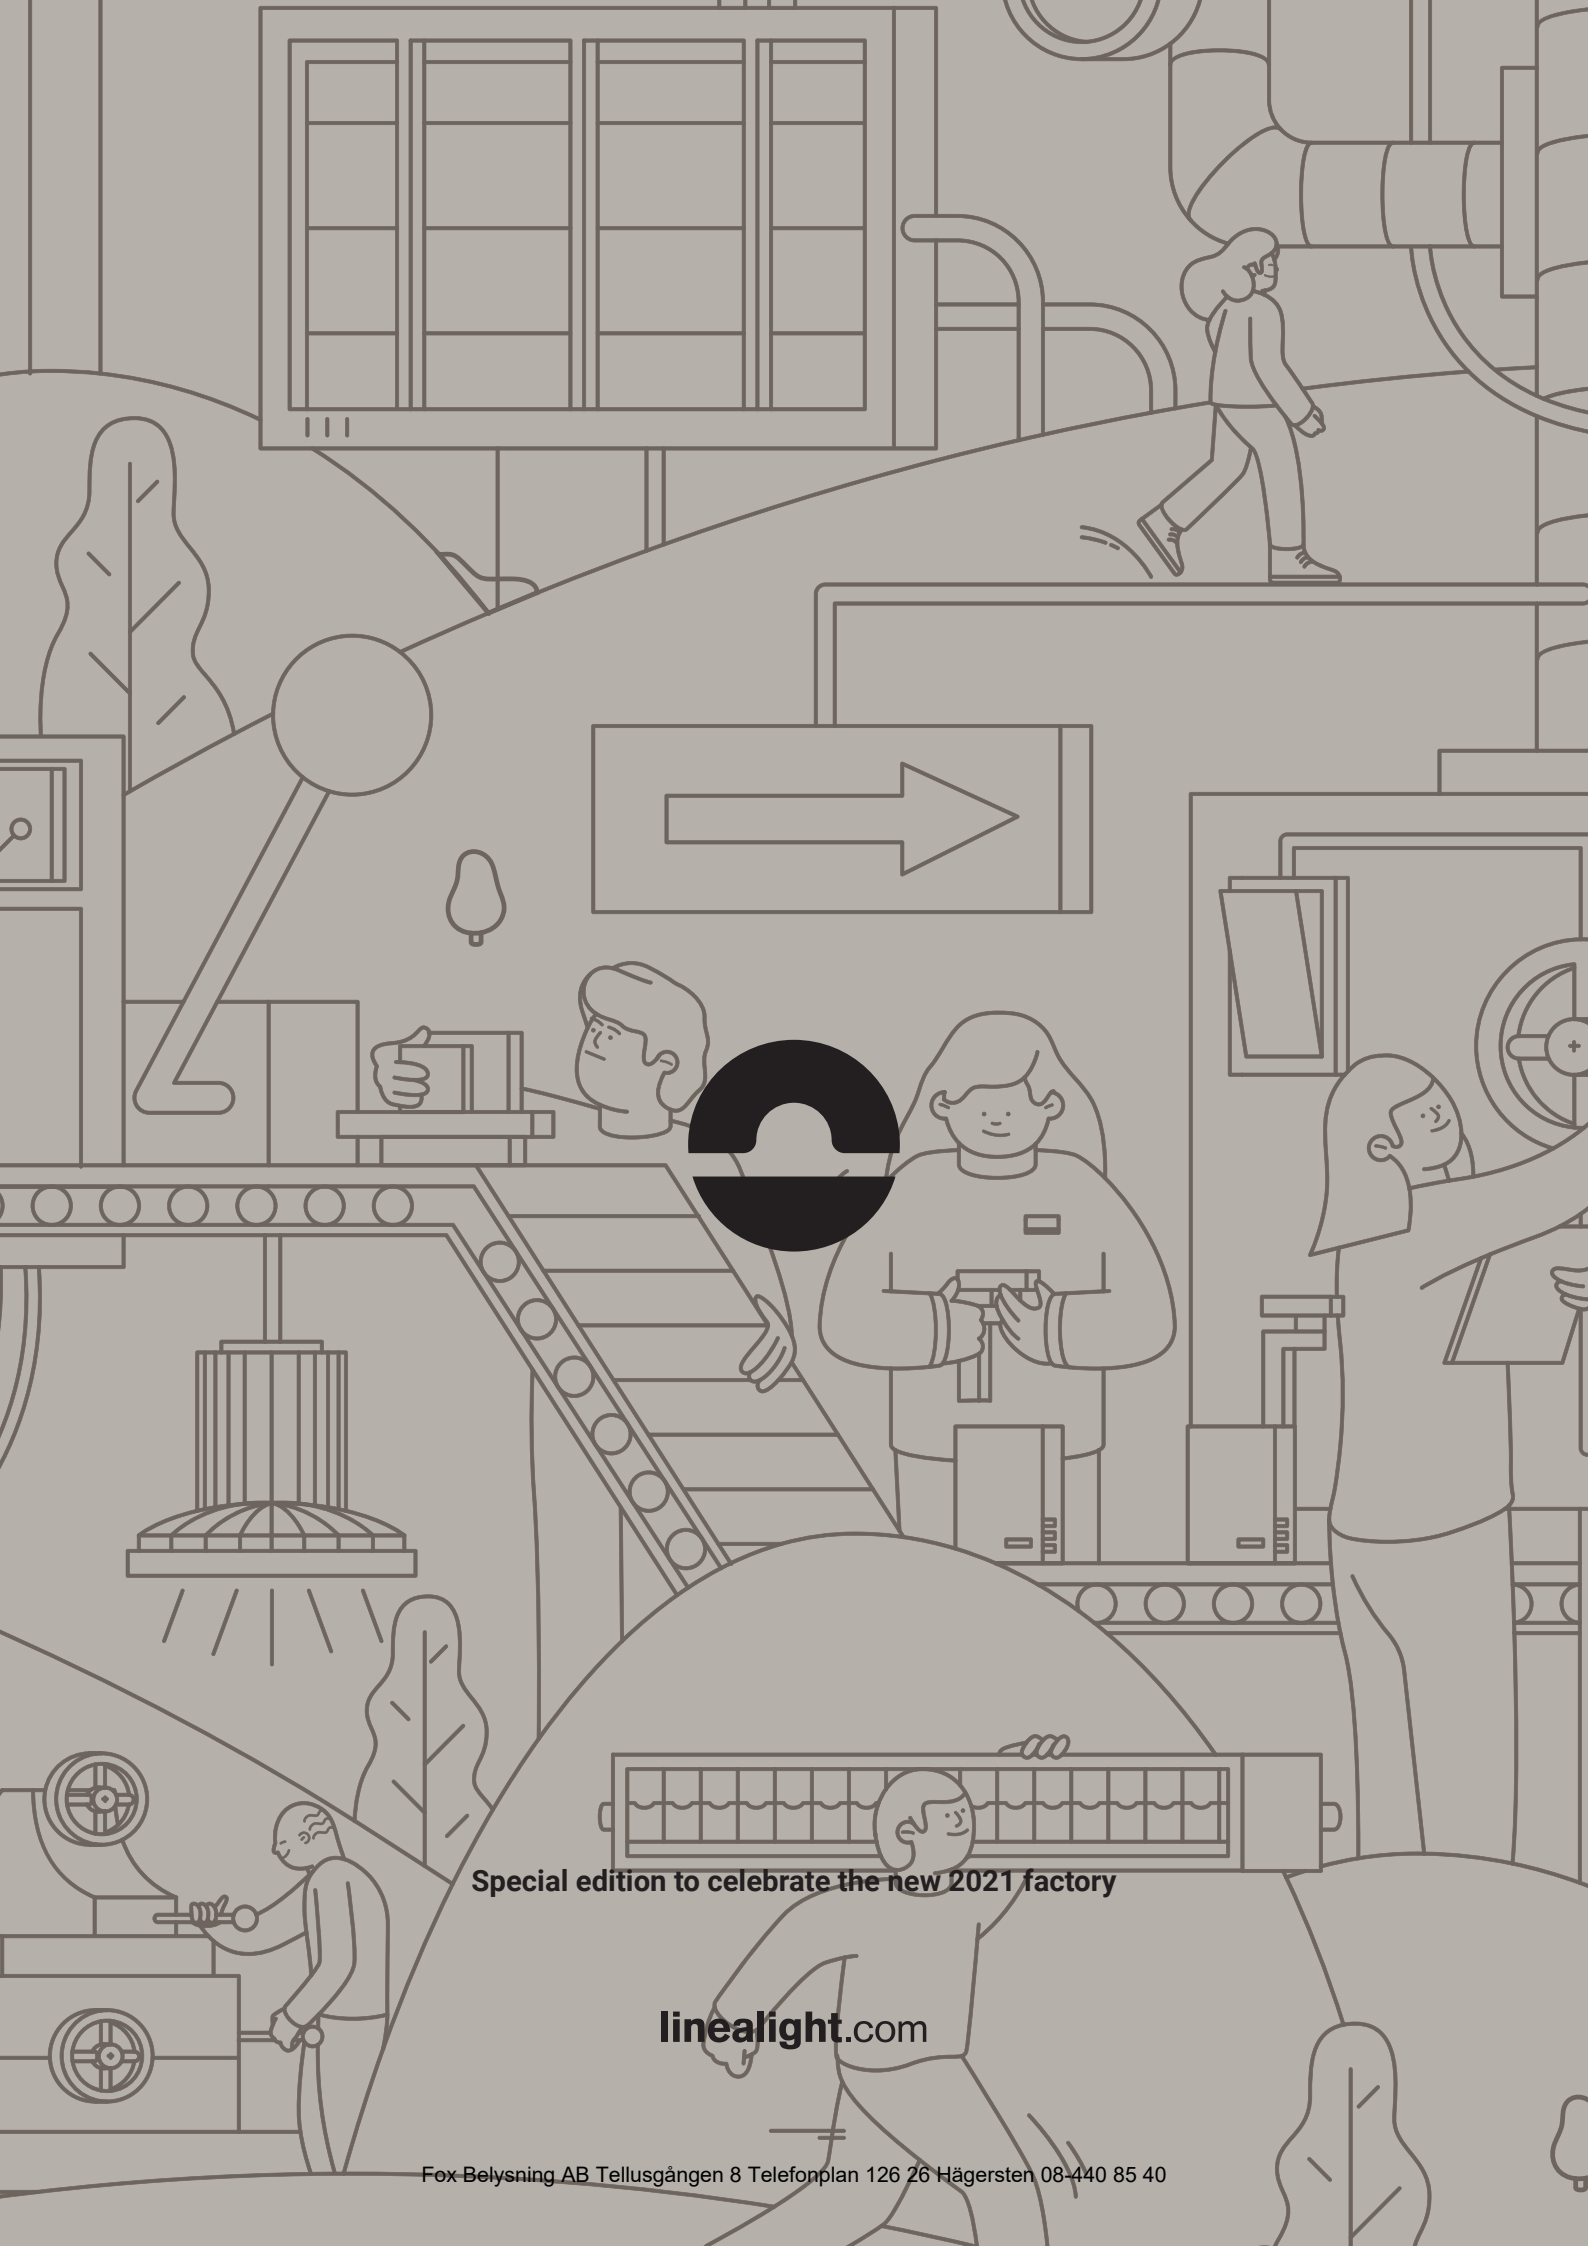

Special edition to celebrate the new 2021 factory

linealight.com