


paseo

Materials

Transparent or opalescent polycarbonate body



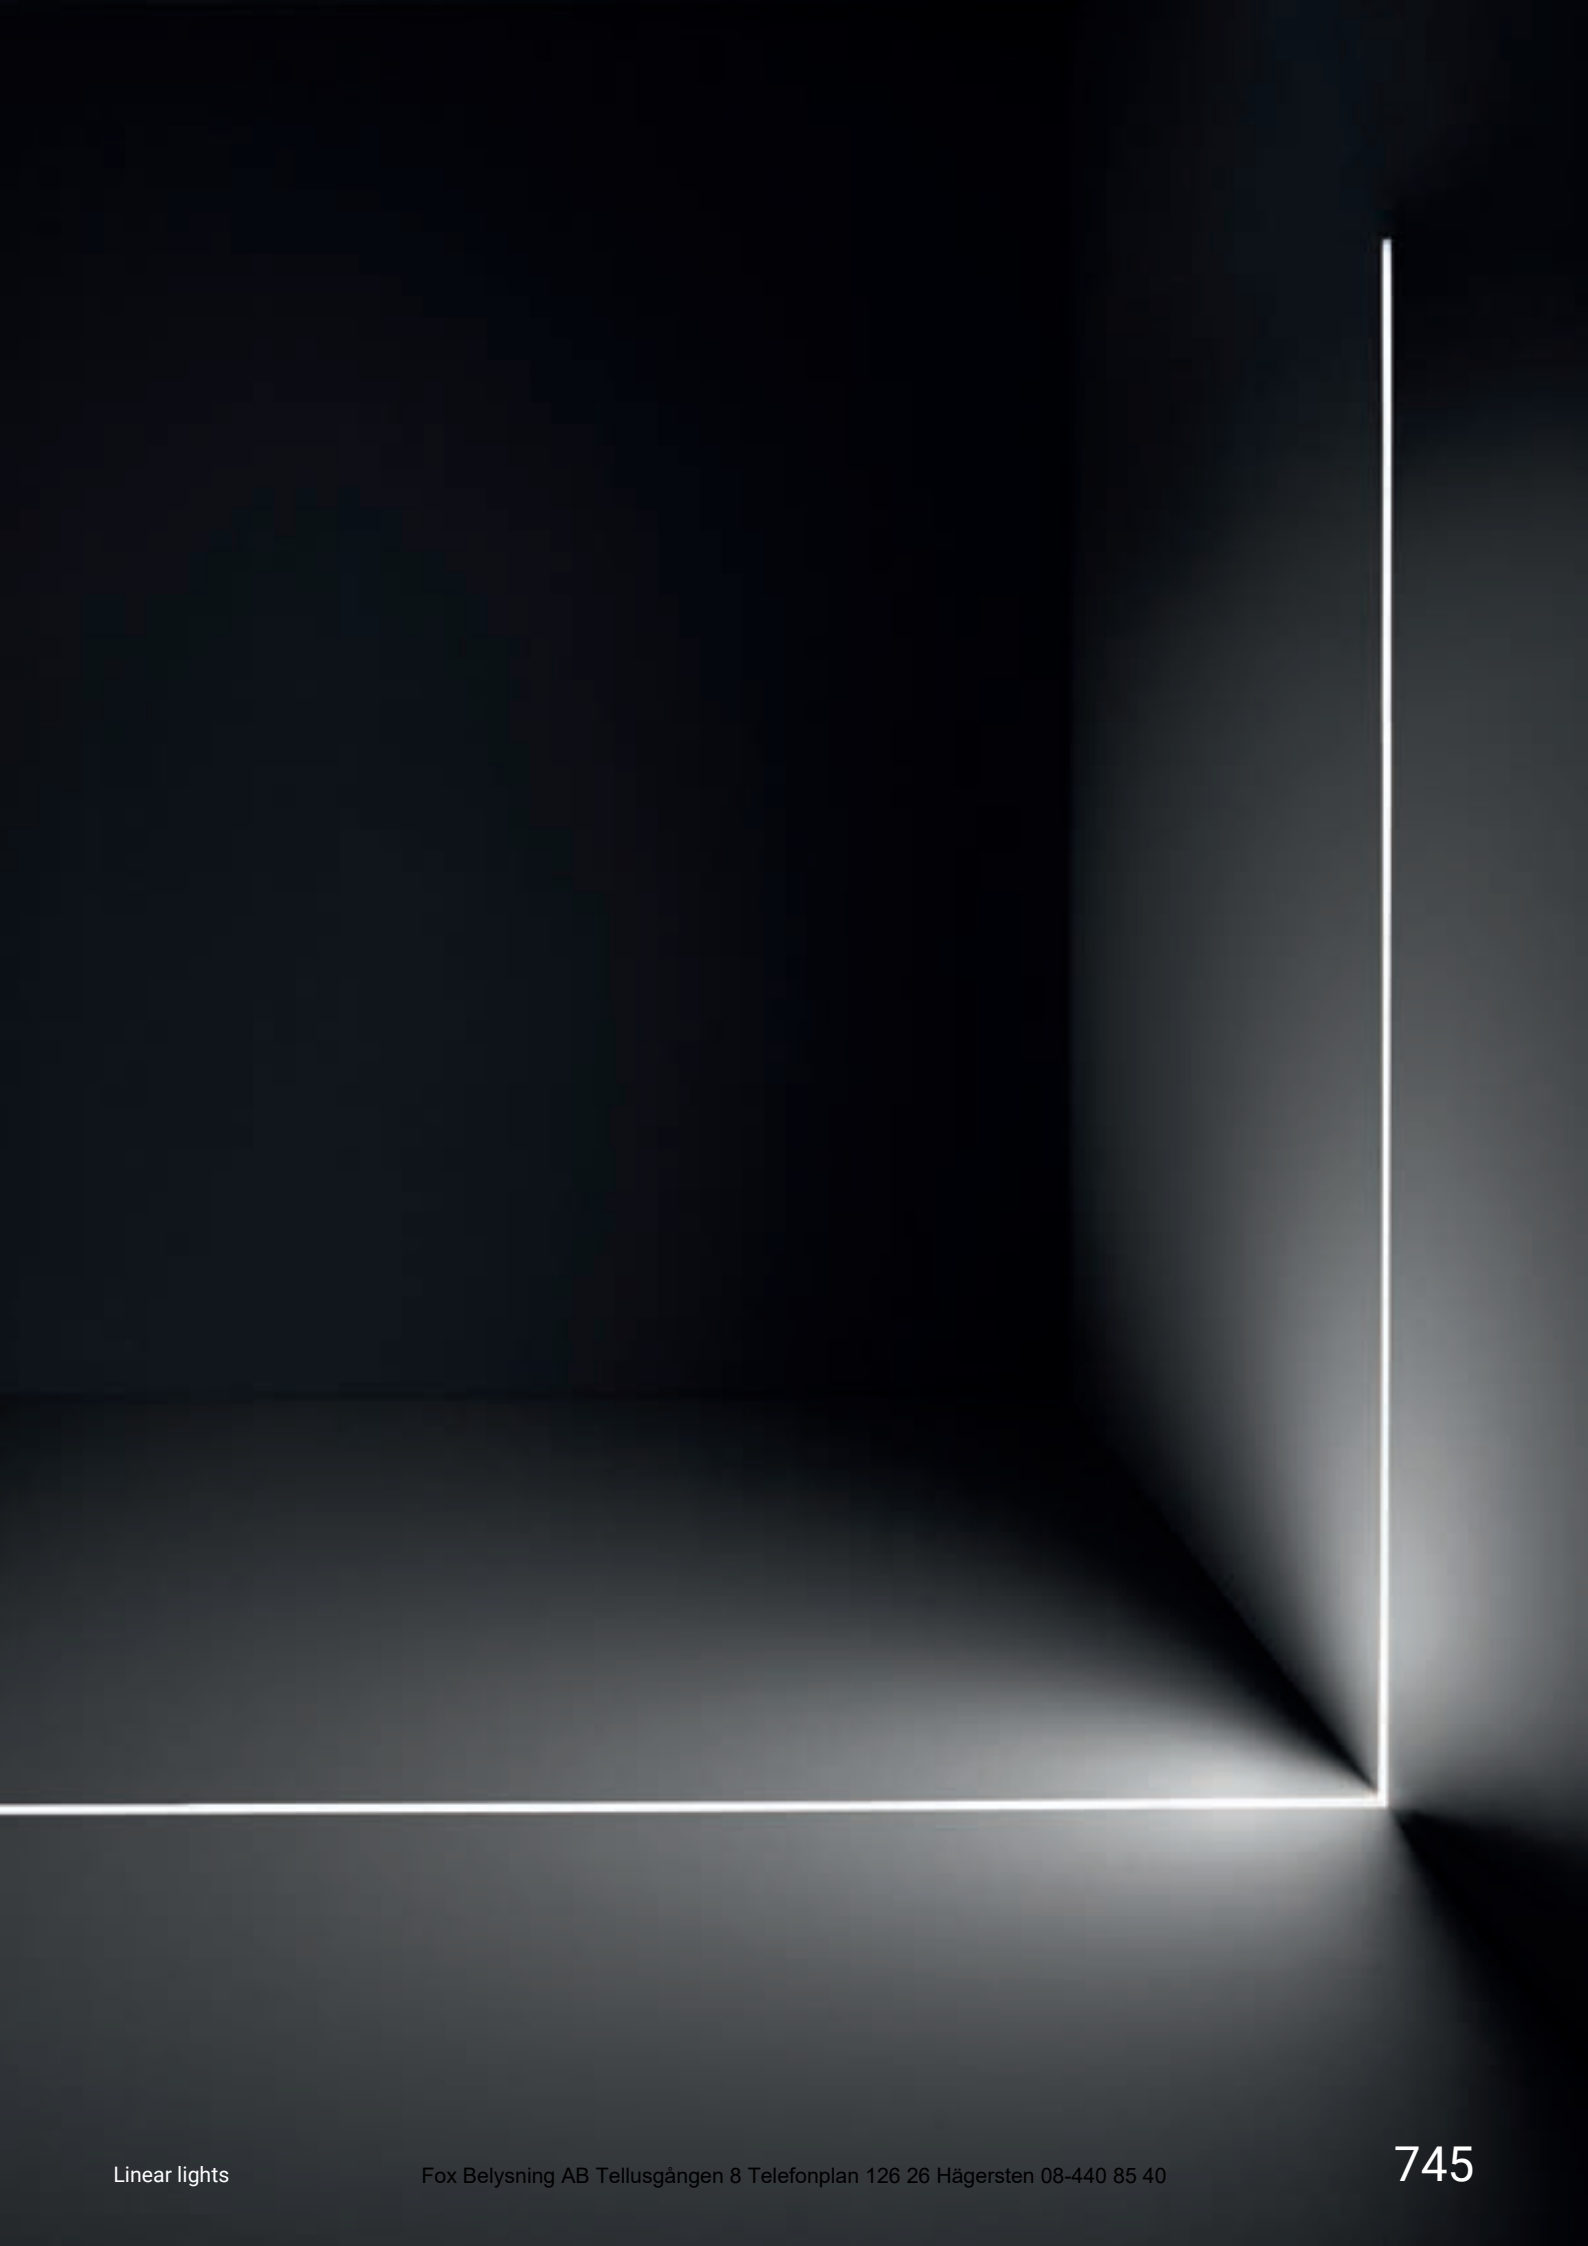

paseo range



	_L / _L Anti-glare	Dark	_X
3,5 W	-	594 x 26 mm	-
6,2 W 6,6 W	512 x 24 mm	-	-
7 W	-	1176 x 26 mm	576 x 24 mm
8 W	-	-	576 x 24 mm
8,7 W	-	1467 x 26 mm	-
13,1 W 13,6 W	1152 x 24 mm	-	-
17 W 17,3 W	-	-	1152 x 24 mm
19,5 W	1452 x 24 mm	-	-
Finish	Transp. Opaline	Black	Transp.
topLED	2700K - 3000K - 4000K - RGBW	2700K - 3000K - 4000K	-
powerLED	-	-	2700K - 3000K - 4000K - RGBW
Optics	Spot - Flood - Asymmetric - General	General	Spot - Flood - W.Flood - Elliptic
 Driver	On/Off - 0/1-10V - DALI	On/Off - DALI/PUSH - DMX	-
 Driver	On/Off - DMX	-	On/Off - 1/10 V - DALI - DMX

Minimal size


The new Paseo models are even thinner and more versatile, with width of 24 to 26 millimetres that adapt easily to any design need. Their very small size is combined with simple, minimalist aesthetics.

24 mm

Real sizes



The Paseo range comes with a wide choice of optics, lengths, colour temperatures, and controls. These include DALI and 1-10V, and RGBW DMX and RGB pixel (**Pag. 851**) for dynamic lighting management and spectacular architectural illumination. The housings and numerous accessories mean Paseo can be recessed or fitted to a wall, ceiling or floor.

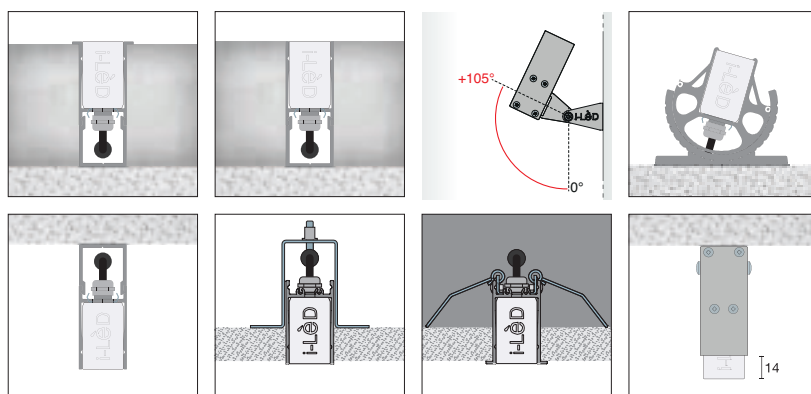

Maximum protection

An electrostatic discharge occurs when, between two bodies that are close or at contact, there occurs a transfer of charges which could at times damage electronics and LED modules. Paseos with incorporated drivers come with an up to 4KV electrostatic discharge (ESD) protection.




Ultrasonic-welded caps offer perfect mechanical resistance and light continuity

Thermoplastic PUR cables with IP67 quick coupling connectors made of M12 with 4 or 5 poles

Steel spring for safe coupling of the Paseo profile to the outer casing

Apparatus equipped TCS® valve, to avoid the formation of humidity in the profile

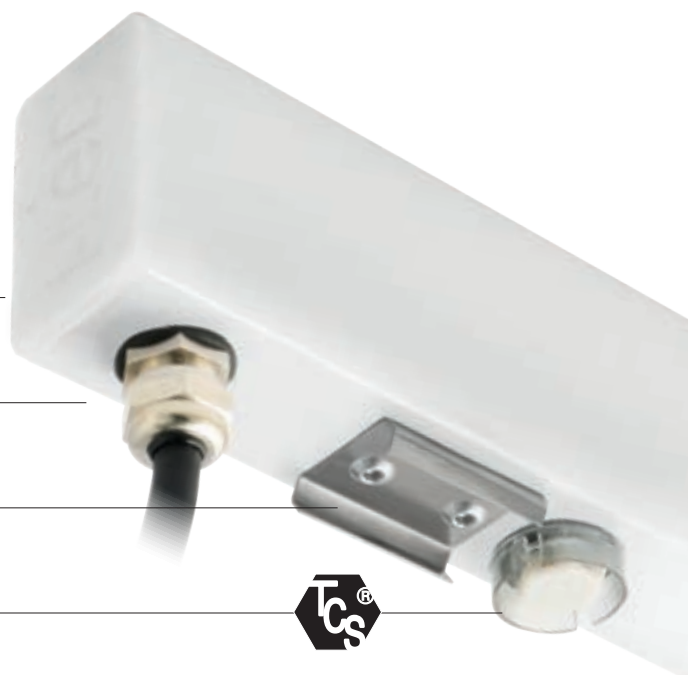


Paseo_L | Linear profiles | 24V DC | topLED



6,6 W DC	Cct	lm S - D	Optic
Transp. 97673	M 2700	662 - 507	20 Flood (37°)
	W 3000	720 - 760	07 Asymm. -
	N 4000	749 - 777	


6,6 W DC	Cct	lm S - D	Optic
Opaline 81328	M 2700	662 - 330	00 General (120°)
	W 3000	720 - 393	
	N 4000	749 - 405	



89179	89359	99331	99332	99722
ON/OFF 1 - 4 art.	ON/OFF 1 - 8 art.	ON/OFF 1 - 25 art.	0/1-10V 1 - 25 art.	DALI 1 - 20 art.
p 92 x l 117 x h 38	p 115 x l 140 x h 50	p 150 x l 60 x h 35	p 150 x l 60 x h 35	p 191 x l 63 x h 38

13,6 W DC	Cct	lm S - D	Optic
Transp. 97674	M 2700	1208 - 931	20 Flood (34°)
	W 3000	1313 - 1168	07 Asymm. -
	N 4000	1365 - 1198	


13,6 W DC	Cct	lm S - D	Optic
Opaline 81329	M 2700	1208 - 624	00 General (137°)
	W 3000	1313 - 849	
	N 4000	1365 - 922	



89179	89359	99331	99332	99722
ON/OFF 1 - 2 art.	ON/OFF 1 - 4 art.	ON/OFF 1 - 12 art.	0/1-10V 1 - 12 art.	DALI 1 - 10 art.
p 92 x l 117 x h 38	p 115 x l 140 x h 50	p 150 x l 60 x h 35	p 150 x l 60 x h 35	p 191 x l 63 x h 38

19,5 W DC	Cct	lm S - D	Optic
Transp. 97675	M 2700	1913 - 1474	20 Flood (34°)
	W 3000	2079 - 1825	07 Asymm. -
	N 4000	2162 - 1866	

19,5 W DC	Cct	lm S - D	Optic
Opaline 81330	M 2700	1913 - 988	00 General (148°)
	W 3000	2079 - 1133	
	N 4000	2162 - 1168	



89179	89359	99331	99332	99722
ON/OFF 1 art.	ON/OFF 1 - 2 art.	ON/OFF 1 - 7 art.	0/1-10V 1 - 7 art.	DALI 1 - 6 art.
p 92 x l 117 x h 38	p 115 x l 140 x h 50	p 150 x l 60 x h 35	p 150 x l 60 x h 35	p 191 x l 63 x h 38


Cables, recessed casing and accessories Pag. 754-757

Paseo_L | Linear profiles | 190-250 V AC | topLED




6,6 W DC - 7,4 W AC	Cct	lm S - D	Optic
Transp. 96150	M 2700	662 - 507	20 Flood (37°)
	W 3000	720 - 760	07 Asymm. -
	N 4000	749 - 777	

6,6 W DC - 7,4 W AC	Cct	lm S - D	Optic
Opaline 81331	M 2700	662 - 330	00 General (120°)
	W 3000	720 - 393	
	N 4000	749 - 405	




13,6 W DC - 15,2 W AC	Cct	lm S - D	Optic
Transp. 96151	M 2700	1208 - 931	20 Flood (34°)
	W 3000	1313 - 1365	07 Asymm. -
	N 4000	1365 - 1400	

13,6 W DC - 15,2 W AC	Cct	lm S - D	Optic
Opaline 81332	M 2700	1208 - 931	00 General (137°)
	W 3000	1313 - 1365	
	N 4000	1365 - 1400	



19,5 W DC - 21,8 W AC	Cct	lm S - D	Optic
Transp. 96152	M 2700	1913 - 1474	20 Flood (34°)
	W 3000	2079 - 1825	07 Asymm. -
	N 4000	2162 - 1866	

19,5 W DC - 21,8 W AC	Cct	lm S - D	Optic
Opaline 81333	M 2700	1913 - 988	00 General (148°)
	W 3000	2079 - 1133	
	N 4000	2162 - 1168	




Cables, recessed casing and accessories Pag. 754-757

RTG **81332W00**

Paseo_L | Linear profiles | 24V DC | topLED 12 W/m




6,6 W DC	Cct	lm S - D	Optic
Transp. 94021	M 2700	662 - 264	20 Spot -
	W 3000	720 - 288	07 Asymm. -
	N 4000	749 - 294	



89179	89359	99331	99332	99722
ON/OFF 1 - 4 art. p 92 x l 117 x h 38	ON/OFF 1 - 8 art. p 115 x l 140 x h 50	ON/OFF 1 - 25 art. p 150 x l 60 x h 35	0/1-10V 1 - 25 art. p 150 x l 60 x h 35	DALI 1 - 20 art. p 191 x l 63 x h 38

13,6 W DC	Cct	lm S - D	Optic
Transp. 94022	M 2700	1208 - 496	20 Spot -
	W 3000	1313 - 537	07 Asymm. -
	N 4000	1365 - 548	




89179	89359	99331	99332	99722
ON/OFF 1 - 2 art. p 92 x l 117 x h 38	ON/OFF 1 - 4 art. p 115 x l 140 x h 50	ON/OFF 1 - 12 art. p 150 x l 60 x h 35	0/1-10V 1 - 12 art. p 150 x l 60 x h 35	DALI 1 - 10 art. p 191 x l 63 x h 38

Cables, recessed casing and accessories Pag. 754-757


Paseo_L Anti-glare | Linear profiles | 190-250 V AC | topLED 12 W/m




6,2 W DC - 7 W AC	Cct	lm S - D	Optic
Transp. 93994	M 2700	662 - 264	20 Spot -
	W 3000	720 - 288	07 Asymm. -
	N 4000	749 - 294	



13,1 W DC - 15 W AC	Cct	lm S - D	Optic
Transp. 93995	M 2700	1208 - 496	20 Spot -
	W 3000	1313 - 537	07 Asymm. -
	N 4000	1365 - 548	



Cables, recessed casing and accessories Pag. 754-757

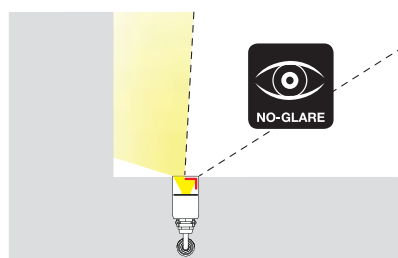

Device equipped with Anti-glare profile for reducing direct glaring. The light emission intensity remains unvaried though. (93994 / 93995)

Paseo_L | Linear profiles | 24V DC | topLED




6,6 W DC

Opaline **84055**

Q RGBW natural white
V RGBW warm white

Optic

00 General -



Driver

ON/OFF 24V DC
14W - 150W
Pag. 940 - 941

Switching

24V DC Switching
50W - 750W
Pag. 932

DMX

DMX Controllers
Pag. 952 - 953

99385

DMX/RDM
addresser

89365

120 Ohm DMX line
closure


13,6 W DC

Opaline **84056**

Q RGBW natural white
V RGBW warm white

Optic

00 General -



Driver

ON/OFF 24V DC
14W - 150W
Pag. 940 - 941

Switching

24V DC Switching
50W - 750W
Pag. 932

DMX

DMX Controllers
Pag. 952 - 953

99385

DMX/RDM
addresser

89365

120 Ohm DMX line
closure


19,5 W DC

Opaline **84057**

Q RGBW natural white
V RGBW warm white

Optic

00 General -



Driver

ON/OFF 24V DC
14W - 150W
Pag. 940 - 941

Switching

24V DC Switching
50W - 750W
Pag. 932

DMX

DMX Controllers
Pag. 952 - 953

99385

DMX/RDM
addresser

89365

120 Ohm DMX line
closure

Cables, recessed casing and accessories Pag. 754-757

Paseo Dark | Linear profiles | 48V DC | topLED



3,5 W DC

Black **84214**

Cct


M 2700
W 3000
N 4000

Im S - D

441 - On req.
450 - On req.
495 - On req.

Optic

00 General -



99784

On/Off
150W CV 48V

99785

On/Off
240W CV 48V

83180

DALI/PUSH
150W CV 48V

Switching CV 48V

83178

DMX 384W



Steel fixing
brackets
included

7 W DC

Black **84215**

Cct


M 2700
W 3000
N 4000

Im S - D

882 - On req.
900 - On req.
990 - On req.

Optic

00 General -



99784

On/Off
150W CV 48V

99785

On/Off
240W CV 48V

83180

DALI/PUSH
150W CV 48V

Switching CV 48V

83178

DMX 384W



Steel fixing
brackets
included

8,7 W DC

Black **84216**

Cct


M 2700
W 3000
N 4000

Im S - D

1103 - On req.
1125 - On req.
1238 - On req.

Optic

00 General -



99784

On/Off
150W CV 48V

99785

On/Off
240W CV 48V

83180

DALI/PUSH
150W CV 48V

Switching CV 48V

83178


DMX 384W




Steel fixing
brackets
included

Accessories Pag. 757

For cables and power supply/control contact Linea Light support service.



Paseo Dark OFF



Paseo Dark ON




Paseo_X | Linear profiles | 190-250 V AC | powerLED




7 W DC - 7,7 W AC	Cct	lm S - D	Optic
Transp. 96196	M 2700	1032 - On req	08 Spot (17°)
	W 3000	1104 - On req	15 Flood (26°)
	N 4000	1175 - On req	30 Flood (29°)
			60 W.Flood (51°)
			25 Elliptic -

12 LEDs



17,3 W DC - 19,4 W AC	Cct	lm S - D	Optic
Transp. 96197	M 2700	2544 - On req	08 Spot (17°)
	W 3000	2736 - On req	15 Flood (26°)
	N 4000	2904 - On req	30 Flood (29°)
			60 W.Flood (51°)
			25 Elliptic -

24 LEDs




Paseo_X | Linear profiles | 190-250 V AC | powerLED




7 W DC - 7,7 W AC	Cct	lm S - D	Optic
Transp. 97255	M 2700	1128 - On req	08 Spot (17°)
	W 3000	1212 - On req	15 Flood (26°)
	N 4000	1284 - On req	30 Flood (29°)
			60 W.Flood (51°)
			25 Elliptic -

12 LEDs



17,3 W DC - 19,4 W AC	Cct	lm S - D	Optic
Transp. 97611	M 2700	2256 - On req	08 Spot (17°)
	W 3000	2424 - On req	15 Flood (26°)
	N 4000	2568 - On req	30 Flood (29°)
			60 W.Flood (51°)
			25 Elliptic -

24 LEDs




Cables, recessed casing and accessories Pag. 754-757

Paseo_X | Linear profiles | 190-250 V AC | powerLED




7 W DC - 7,7 W AC	Cct	lm S - D	Optic
Transp. 97256	M 2700	1128 - On req	08 Spot (17°)
	W 3000	1212 - On req	15 Flood (26°)
	N 4000	1284 - On req	30 Flood (29°)
			60 W.Flood (51°)
			25 Elliptic -

12 LEDs



17,3 W DC - 19,4 W AC	Cct	lm S - D	Optic
Transp. 97612	M 2700	2256 - On req	08 Spot (17°)
	W 3000	2424 - On req	15 Flood (26°)
	N 4000	2568 - On req	30 Flood (29°)
			60 W.Flood (51°)
			25 Elliptic -

24 LEDs




Paseo_X | Linear profiles | 190-250 V AC | powerLED




8 W DC - 9 W AC		Optic
Transp. 84058	Q RGBW natural white	25 Elliptic -
	V RGBW warm white	

12 LEDs



17 W DC - 19 W AC		Optic
Transp. 84059	Q RGBW natural white	25 Elliptic -
	V RGBW warm white	

24 LEDs



DMX	99385	89365
DMX Controllers Pag. 952 - 953	DMX/RDM	120 Ohm DMX line closure

Cables, recessed casing and accessories Pag. 754-757



Cables



24V DC 190-250V AC

99216	Conn. F.4 pin M12 (L 1,5m)
89190	Conn. F.4 pin M12 (L 5m)

suitable for: Paseo



DMX

89189	Conn. M.5 pin M12 (L 5m)
-------	--------------------------

suitable for: Paseo



DMX

89186	Conn. M.5 pin M12 + M.3 pin XLR (L 5m)
-------	--

suitable for: Paseo



DMX

98494	Conn. M.5 pin M12 + F.3 pin XLR (L 5m)
-------	--

suitable for: Paseo



DMX

98493	Conn. M.5 pin M12 + M.5 pin XLR (L 5m)
-------	--

suitable for: Paseo



1-10V & DALI

99879	Conn M. 5 pin M12 (L 5m)
-------	--------------------------

suitable for: Paseo

RTG 99216 / 89190

Extension cables



24V DC 190-250V AC

98437	Conn M. + F. 4 pin M12 (L 1m)
98149	Conn M. + F. 4 pin M12 (L 5m)
89188	Conn M. + F. 4 pin M12 (L 10m)

suitable for: Paseo



DMX

98994	Conn. M. / F. 5 pin M12 (L 1m)
98993	Conn. M. / F. 5 pin M12 (L 5m)
89187	Conn. M. / F. 5 pin M12 (L 10m)

suitable for: Paseo



1-10V & DALI


89361	Conn M. + F. 5 pin M12 (L 10m)
-------	--------------------------------

suitable for: Paseo


Paseo | Outer casing for floor-mounted recessed installation



Outer casing




Cable gland




Outer casing	Cable gland		
98355	98471	Anod. Al.	513 mm x Paseo 512 mm
98430	98472	Anod. Al.	577 mm x Paseo 576 mm
98356	98473	Anod. Al.	1153 mm x Paseo 1152 mm
98357	98474	Anod. Al.	1453 mm x Paseo 1452 mm


suitable for: Paseo_L / Paseo_L Anti-glare / Paseo_X



Installation accessories



98876
2 x terminal caps for closing the profile.




98553
Joining cap between the outer casings with hole for passing cables through 2 pieces

RTG 98356


Paseo | Outer casing for floor-mounted or ceiling-mounted flushed installation



Outer casing




Cable gland



Outer casing	Cable gland		
98467	98471	Anod. Al.	513 mm x Paseo 512 mm
98468	98472	Anod. Al.	577 mm x Paseo 576 mm
98469	98473	Anod. Al.	1153 mm x Paseo 1152 mm
98470	98474	Anod. Al.	1453 mm x Paseo 1452 mm


suitable for: Paseo_L / Paseo_L Anti-glare / Paseo_X



Installation accessories



98466
2 x terminal caps for closing the profile.




98554
Joining cap between the outer casings with hole for passing cables through 2 pieces

RTG 98469


RTG 98473

Paseo | Outer casing for installation on dropped ceiling with springs




Anod. AL	98374	513 mm x Paseo 512 mm
Anod. AL	98435	577 mm x Paseo 576 mm
Anod. AL	98375	1153 mm x Paseo 1152 mm
Anod. AL	98376	1453 mm x Paseo 1452 mm

suitable for: Paseo_L / Paseo_X




Installation accessories



98465


2 x terminal caps for closing the profile.

Paseo | Outer casing for flush-mounted installation on dropped ceiling



Anod. AL	98367	513 mm x Paseo 512 mm
Anod. AL	98434	577 mm x Paseo 576 mm
Anod. AL	98368	1153 mm x Paseo 1152 mm
Anod. AL	98369	1453 mm x Paseo 1452 mm

suitable for: Paseo_L / Paseo_X




Installation accessories



98464


2 x terminal caps for closing the profile.

Paseo | Outer casing for "3D" ceiling-mounted installation




Anod. AL	98836	513 mm x Paseo 512 mm
Anod. AL	98839	577 mm x Paseo 576 mm
Anod. AL	98837	1153 mm x Paseo 1152 mm
Anod. AL	98838	1453 mm x Paseo 1452 mm

suitable for: Paseo_L / Paseo_X




Installation accessories



98840


2 x terminal caps for closing the profile.



98841


Joining cap between the outer casings with hole for passing cables through 2 pieces

Paseo | Outer casing with bracket for wall-mounted installation




Anod. AL	98842	517 mm x Paseo 512 mm
Anod. AL	98843	581 mm x Paseo 576 mm
Anod. AL	98844	1157 mm x Paseo 1152 mm
Anod. AL	98845	1457 mm x Paseo 1452 mm

suitable for: Paseo_L / Paseo_X

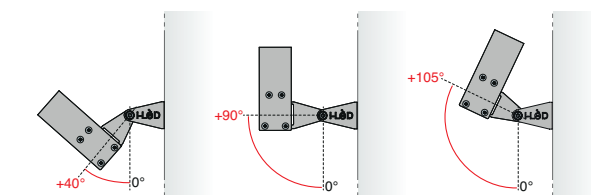


Installation accessories



Included

2 x terminal caps for closing the profile.

Paseo | Orientable floor-standing fixing system



Transp.

98771


Orientable clips

suitable for: Paseo_L / Paseo_X

Pair of fixing clips made of transparent polycarbonate so as not to alter the light emission of Paseo. Orientable accessory, allows to adjust the inclination of Paseo from +90° up to -90°.



Paseo | Fixing base



Steel

98772

L 300 - L1 200 mm Paseo 512 - 576 mm

Steel


98773

L 950 - L1 850 mm Paseo 1152 - 1452 mm

suitable for: Paseo_L / Paseo_X

Possibility of using the independent plate (plate + clip + Paseo) as moveable support without fixing it to a surface (clips 98771 not included).

Paseo | Extraction key



Anod. Al.

98475

Extraction key

suitable for: Paseo_L / Paseo_X

Paseo extraction key is the tool you need to extract Paseo from the outer casing. Compatible with any type of Paseo outer casing.



Paseo | Support bracket for wall installation



Steel

83162

Fixing brackets

suitable for: Paseo_L / Paseo_X / Paseo_Dark