


petit




Square or round-shaped, Petit has two small slots with extremely small emission angle. A step light conceived for prompt lighting of significant architectural elements along corridors, staircases and transit areas.

Materials

Brass or aluminium body

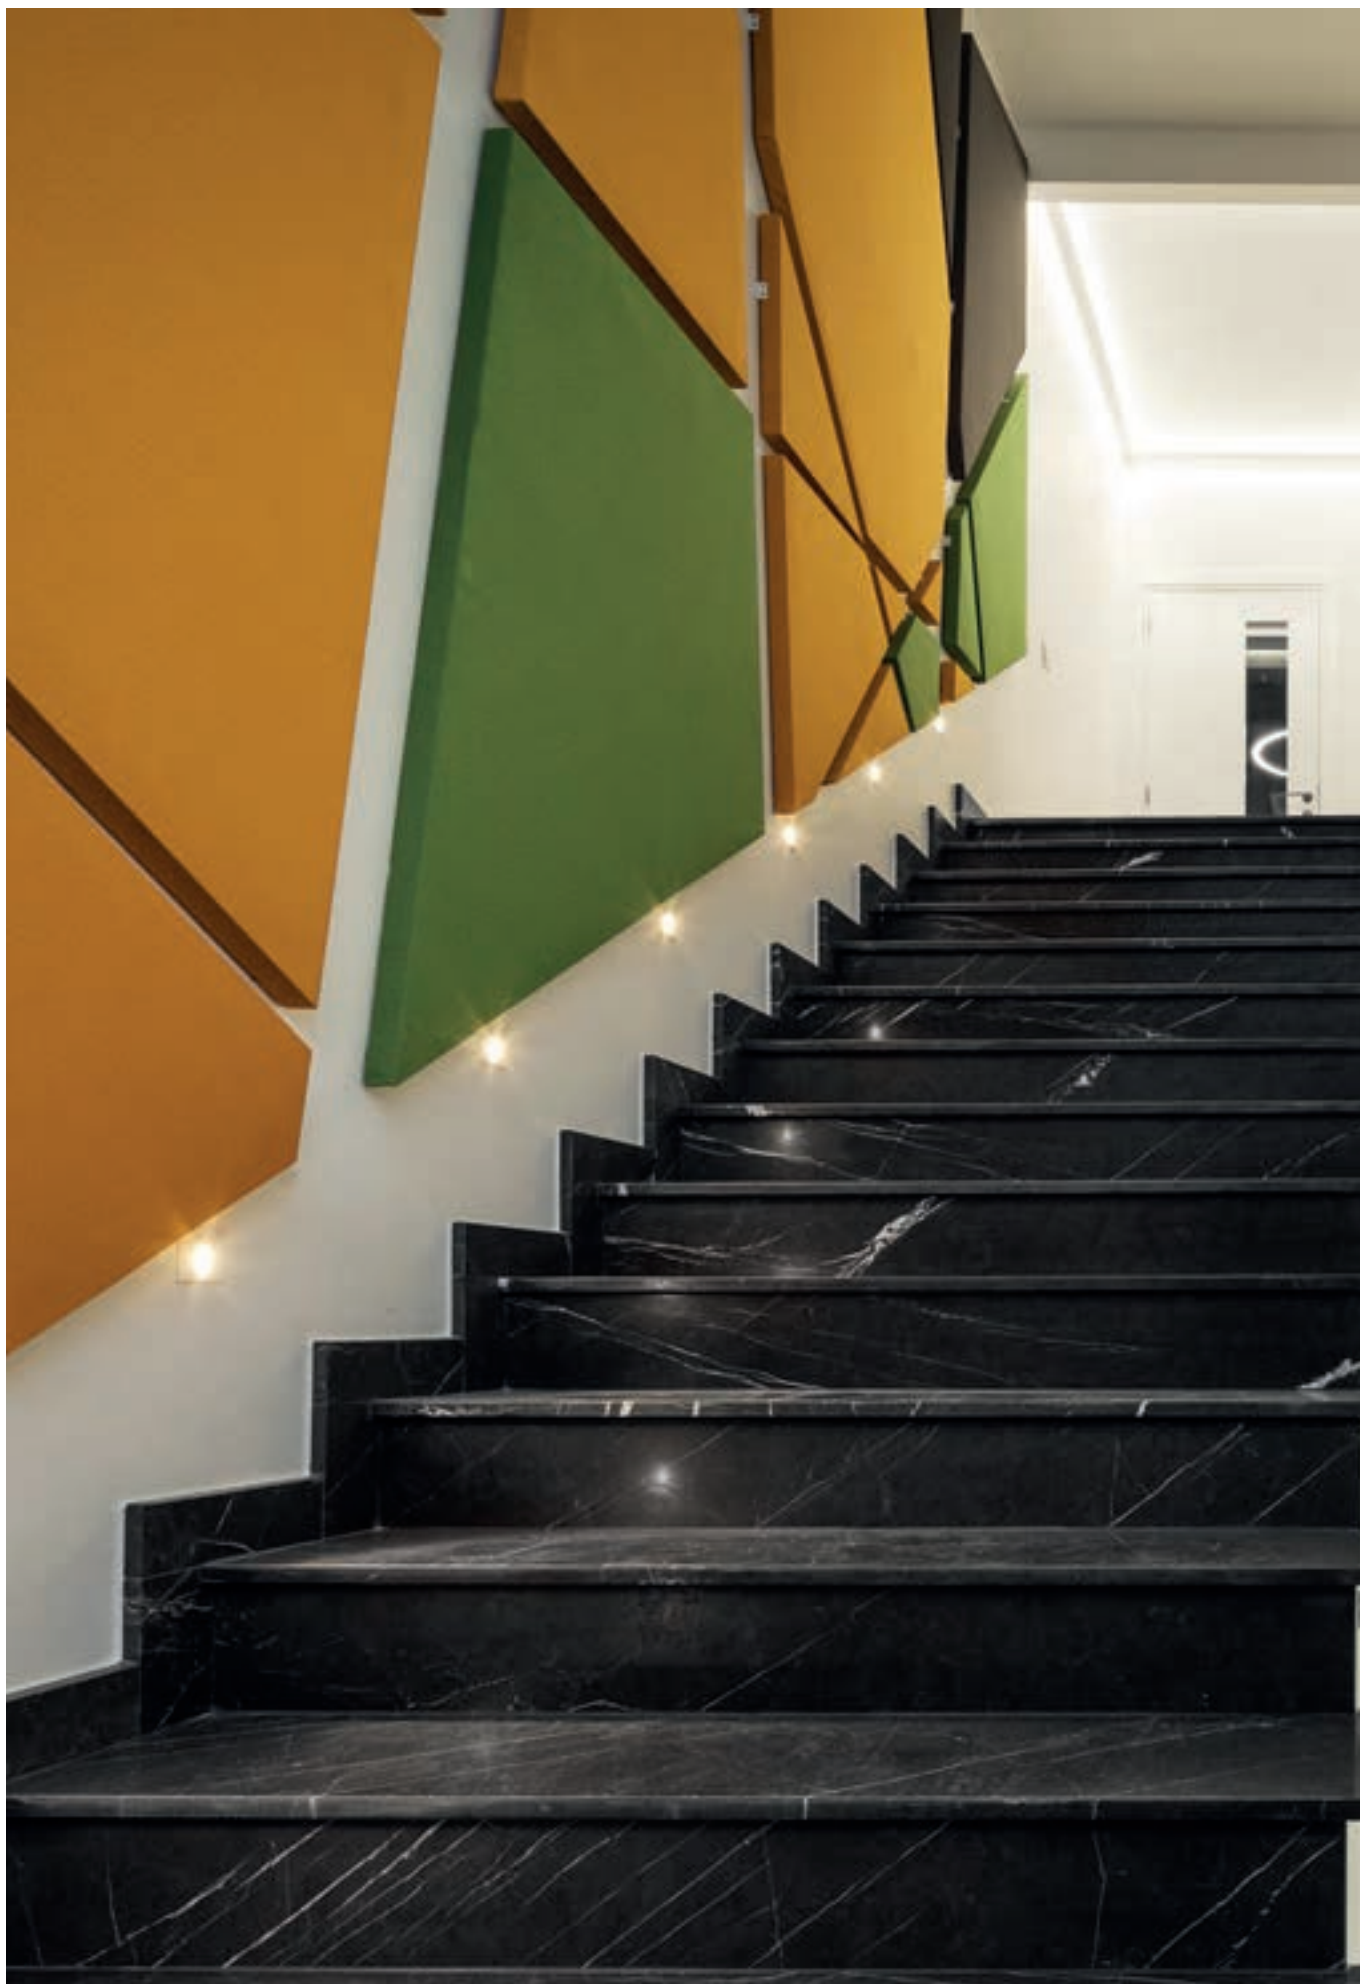

Petit_R | Path-marker | powerLED 1 W 350 mA




Efficiency - CRI 80

White	92316	2700 K	98 lm	M	Narrow Spot	05
Nickel	92318	3000 K	107 lm	W		
		4000 K	114 lm	N		

Electronics


 89144 ON/OFF 1 - 2 art.	 99708 0/1-10V converter 1 - 4 art.	+ driver CV 24V 981	 99711 DALI converter 1 - 4 art.	+ driver CV 24V 981
--	---	------------------------	--	------------------------



1009 Recessed casing
84335

RTG 92316W05
92318W05

Petit_R | Path-marker | powerLED 1.5 W 500 mA




Efficiency - CRI 80

White	92320	2700 K	130 lm	M	Narrow Spot	05
Nickel	92322	3000 K	143 lm	W		
		4000 K	152 lm	N		


Electronics

 99195 ON/OFF 1 - 2 art.	 99709 0/1-10V converter 1 art.	+ driver CV 24V 981	 99712 DALI converter 1 art.	+ driver CV 24V 981
--	---	------------------------	--	------------------------



1009 Recessed casing
84917

Petit_Q | Path-marker | powerLED 1 W 350 mA




Efficiency - CRI 80

White	92324	2700 K	98 lm	M	Narrow Spot	05
Nickel	92326	3000 K	107 lm	W		
		4000 K	114 lm	N		

Electronics


 89144 ON/OFF 1 - 2 art.	 99708 0/1-10V converter 1 - 4 art.	+ driver CV 24V 981	 99711 DALI converter 1 - 4 art.	+ driver CV 24V 981
--	---	------------------------	--	------------------------



1009 Recessed casing
84335

RTG 92324W05
92326W05

Petit_Q | Path-marker | powerLED 1.5 W 500 mA




Efficiency - CRI 80

White	92328	2700 K	130 lm	M	Narrow Spot	05
Nickel	92330	3000 K	143 lm	W		
		4000 K	152 lm	N		


Electronics

 99195 ON/OFF 1 - 2 art.	 99709 0/1-10V converter 1 art.	+ driver CV 24V 981	 99712 DALI converter 1 art.	+ driver CV 24V 981
--	---	------------------------	--	------------------------



1009 Recessed casing
84917


Petit_2R | Path-marker | powerLED 1 W 350 mA




Efficiency - CRI 80

White	92405	2700 K	98 lm	M	Narrow Spot	05
Nickel	92407	3000 K	107 lm	W		
		4000 K	114 lm	N		

Electronics




89144
ON/OFF
1 - 2 art.



99708
0/1-10V converter
1 - 4 art.

+ driver CV 24V
981





99711
DALI converter
1 - 4 art.

+ driver CV 24V
981

1009 Recessed casing
84915/84336

RTG **92405W05**
92407W05


Petit_2R | Path-marker | powerLED 2 W 630 mA




Efficiency - CRI 80

White	92409	2700 K	219 lm	M	Narrow Spot	05
Nickel	92411	3000 K	233 lm	W		
		4000 K	249 lm	N		

Electronics




89147
ON/OFF
1 - 2 art.



99710
0/1-10V converter
1 art.

+ driver CV 24V
981





99713
DALI converter
1 art.

+ driver CV 24V
981

1009 Recessed casing
84901

RTG **92409W05**
92411W05


Petit_2Q | Path-marker | powerLED 1 W 350 mA




Efficiency - CRI 80

White	92413	2700 K	98 lm	M	Narrow Spot	05
Nickel	92415	3000 K	107 lm	W		
		4000 K	114 lm	N		

Electronics




89144
ON/OFF
1 - 2 art.



99708
0/1-10V converter
1 - 4 art.

+ driver CV 24V
981





99711
DALI converter
1 - 4 art.

+ driver CV 24V
981

1009 Recessed casing
84915/84336

RTG **92413W05**
92415W05


Petit_2Q | Path-marker | powerLED 2 W 630 mA




Efficiency - CRI 80

White	92417	2700 K	219 lm	M	Narrow Spot	05
Nickel	92419	3000 K	233 lm	W		
		4000 K	249 lm	N		

Electronics




89147
ON/OFF
1 - 2 art.



99710
0/1-10V converter
1 art.

+ driver CV 24V
981



99713
DALI converter
1 art.

+ driver CV 24V
981

1009 Recessed casing
84901

RTG **92417W05**
92419W05