


portik





The optics of Portik downlights include a reflector using the innovative F.O.L.™ system for even projection. The cylindrical or quadrangular lights are available with four different optics, three outputs, and three finishes.

Materials

Aluminium body

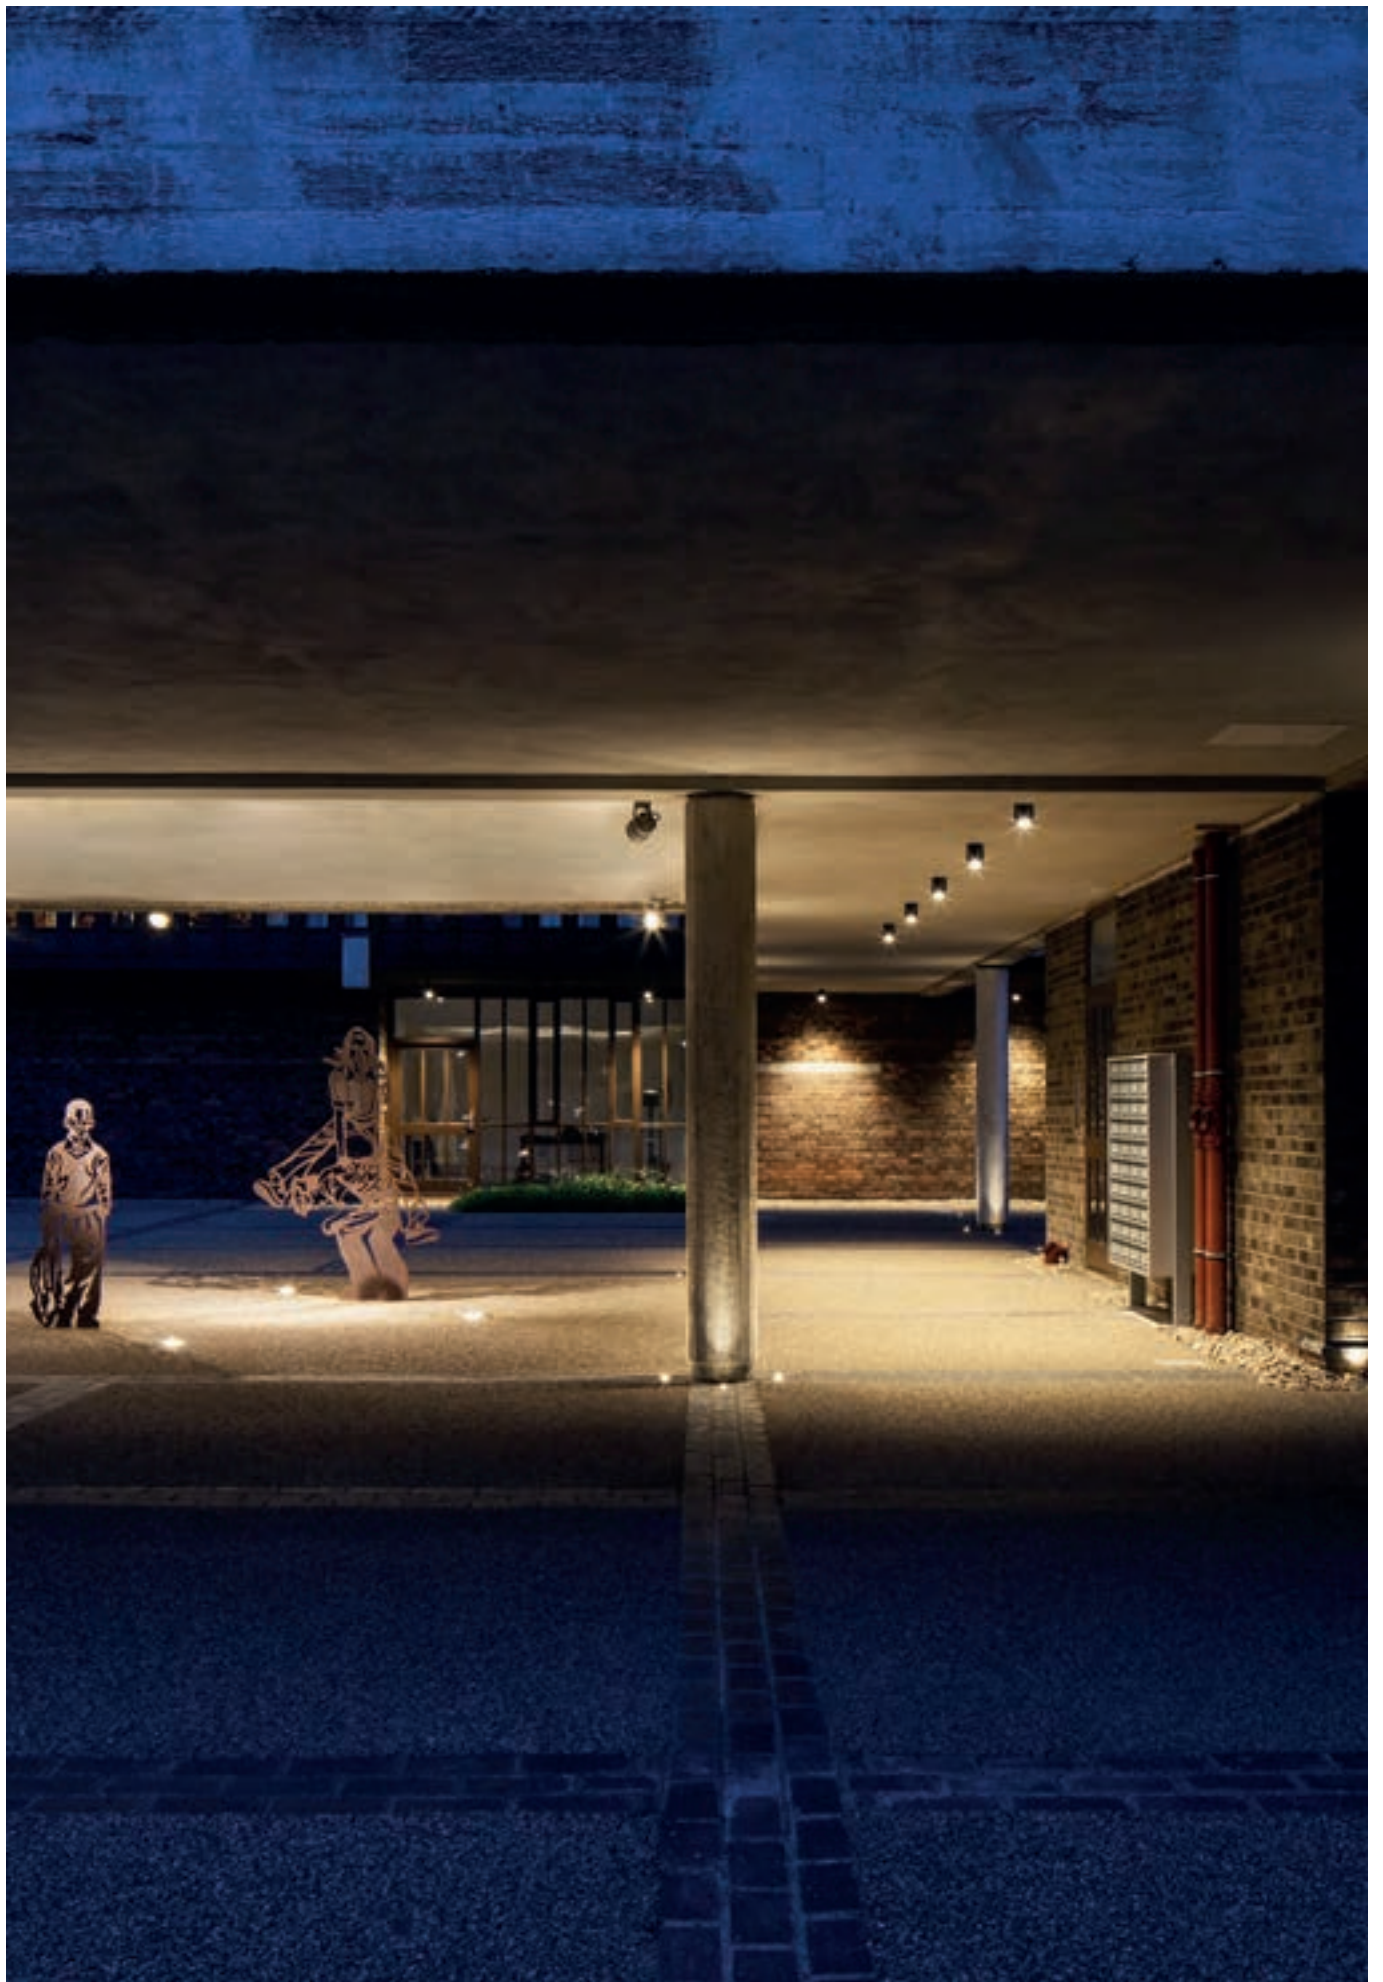

Portik_R | Ceiling luminaires | 190-250 V | powerLED 6 W DC - 8 W AC





CRI 80

White	81851	2700 K	770 lm	M	Spot	15
Black	81852	3000 K	770 lm	W	Medium Flood	30
Grey	81853	4000 K	831 lm	N	Flood	60
Col-Ten	81854					



Portik_R | Ceiling luminaires | 180-300 V | powerLED 12 W DC - 13,5 W AC





CRI 80

White	81855	2700 K	1724 lm	M	Spot	15
Black	81856	3000 K	1724 lm	W	Medium Flood	30
Grey	81857	4000 K	1854 lm	N	Flood	60
Col-Ten	81858					



Portik_R | Ceiling luminaires | 180-300 V | arrayLED



25 W DC - 28 W AC - CRI 80


White	81877	2700 K	3606 lm	M	Spot	15
Black	81878	3000 K	3758 lm	W	Medium Flood	30
Grey	81879	4000 K	3967 lm	N	Flood	60
Col-Ten	81880					

34 W DC - 39 W AC - CRI 80

White	81371	2700 K	5232 lm	M	Spot	15
Black	81372	3000 K	5453 lm	W	Medium Flood	30
Grey	81373	4000 K	5756 lm	N	Flood	60
Col-Ten	81374					



Portik_R DALI | Ceiling luminaires | 180-300 V | arrayLED 33 W DC - 36 W AC




CRI 80

White	81885	2700 K	4469 lm	M	Spot	15
Black	81886	3000 K	4656 lm	W	Medium Flood	30
Grey	81887	4000 K	4915 lm	N	Flood	60
Col-Ten	81888					



Portik_Q | Ceiling luminaires | 180-300 V | arrayLED 6,5 W DC - 8 W AC




CRI 80

White	80618	2700 K	770 lm	M	Spot	15
Black	80619	3000 K	770 lm	W	Medium Flood	30
Grey	80620	4000 K	831 lm	N	Flood	60
Cor-Ten	80621					



Portik_Q | Ceiling luminaires | 180-300 V | arrayLED 12 W DC - 13,5 W AC





CRI 80

White	80622	2700 K	1724 lm	M	Spot	15
Black	80623	3000 K	1724 lm	W	Medium Flood	30
Grey	80624	4000 K	1854 lm	N	Flood	60
Cor-Ten	80625					



Portik_Q | Ceiling luminaires | 180-300 V | arrayLED



25 W DC - 28 W AC - CRI 80


White	81881	2700 K	3606 lm	M	Spot	15
Black	81882	3000 K	3758 lm	W	Medium Flood	30
Grey	81883	4000 K	3967 lm	N	Flood	60
Cor-Ten	81884					

34 W DC - 39 W AC - CRI 80

White	81375	2700 K	5232 lm	M	Spot	15
Black	81376	3000 K	5453 lm	W	Medium Flood	30
Grey	81377	4000 K	5756 lm	N	Flood	60
Cor-Ten	81378					



Portik_Q DALI | Ceiling luminaires | 180-300 V | arrayLED 33 W DC - 36 W AC



CRI 80

White	81889	2700 K	4469 lm	M	Spot	15
Black	81890	3000 K	4656 lm	W	Medium Flood	30
Grey	81891	4000 K	4915 lm	N	Flood	60
Cor-Ten	81892					

