


The background is a detailed line-art illustration in a muted grey tone. It depicts an industrial or construction setting. At the top, a large flywheel is visible. To the right, a worker in a hard hat and safety gear is working on a structure. In the center, a large gear or wheel is prominent. Below it, a worker is shown from the chest up, wearing a hard hat and safety glasses, looking down at a clipboard. To the right of the worker, there are various mechanical components, pipes, and a recycling symbol. At the bottom, a worker in a hard hat and safety gear is holding a clipboard. The overall style is technical and industrial.

# **MAESTRO 3.0**

PROFESSIONAL  
ARCHITECTURAL  
LIGHTING

**Quara**

**i-LèD**

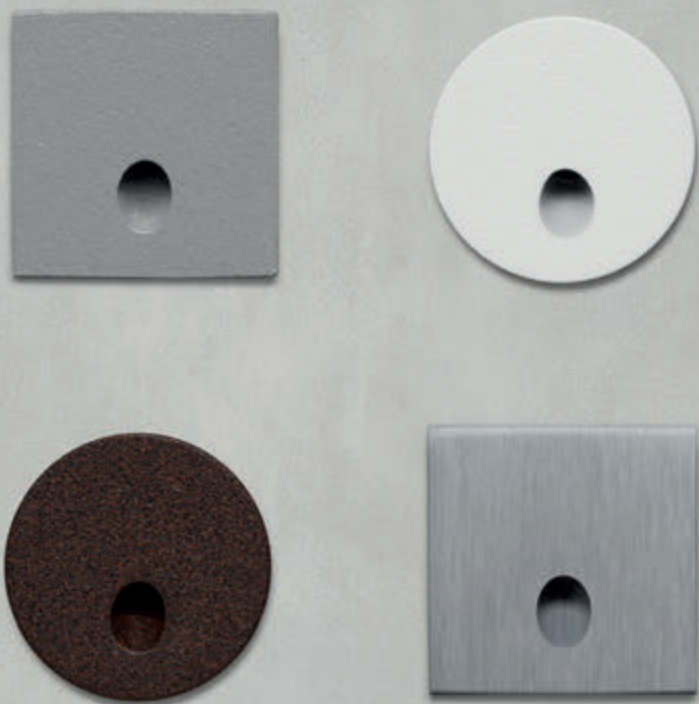


# quara

**Materials**  
Aluminium body

## Quara\_R | Path-marker | powerLED 1 W DC 350 mA



20




| Efficiency - CRI 80    | Cct           | lm S - D | Optic             |
|------------------------|---------------|----------|-------------------|
| White <b>93508</b>     | <b>M</b> 2700 | 98 - 7   | <b>07</b> Asym. - |
| Grey <b>93513</b>      | <b>W</b> 3000 | 107 - 8  |                   |
| DarkBrown <b>93515</b> | <b>N</b> 4000 | 114 - 8  |                   |
| Steel <b>93516</b>     |               |          |                   |


### Electronics

| 89144                                       | 89145                                       | 99375                                        | 99708                                                         | 99711                                                      | + driver 24V DC<br>99374 75W<br>99331 150W |
|---------------------------------------------|---------------------------------------------|----------------------------------------------|---------------------------------------------------------------|------------------------------------------------------------|--------------------------------------------|
| ON/OFF<br>1 - 2 art.<br>p 138 x l 22 x h 21 | ON/OFF<br>3 - 6 art.<br>p 138 x l 22 x h 21 | ON/OFF<br>6 - 12 art.<br>p 138 x l 22 x h 21 | 24V DC converter<br>0/1-10V 1 - 4 art.<br>p 138 x l 22 x h 21 | 24V DC converter<br>DALI 1 - 4 art.<br>p 138 x l 22 x h 21 |                                            |

## Quara\_Q | Path-marker | powerLED 1 W DC 350 mA



20



| Efficiency - CRI 80    | Cct           | lm S - D | Optic             |
|------------------------|---------------|----------|-------------------|
| White <b>93517</b>     | <b>M</b> 2700 | 100 - 7  | <b>07</b> Asym. - |
| Grey <b>93518</b>      | <b>W</b> 3000 | 107 - 8  |                   |
| DarkBrown <b>93519</b> | <b>N</b> 4000 | 114 - 8  |                   |
| Steel <b>93520</b>     |               |          |                   |


### Electronics

| 89144                                       | 89145                                       | 99375                                        | 99708                                                         | 99711                                                      | + driver 24V DC<br>99374 75W<br>99331 150W |
|---------------------------------------------|---------------------------------------------|----------------------------------------------|---------------------------------------------------------------|------------------------------------------------------------|--------------------------------------------|
| ON/OFF<br>1 - 2 art.<br>p 138 x l 22 x h 21 | ON/OFF<br>3 - 6 art.<br>p 138 x l 22 x h 21 | ON/OFF<br>6 - 12 art.<br>p 138 x l 22 x h 21 | 24V DC converter<br>0/1-10V 1 - 4 art.<br>p 138 x l 22 x h 21 | 24V DC converter<br>DALI 1 - 4 art.<br>p 138 x l 22 x h 21 |                                            |

## Quara\_R | Path-marker | powerLED 2 W DC 630 mA



52



| Efficiency - CRI 80 | Cct           | lm S - D     | Optic               |
|---------------------|---------------|--------------|---------------------|
| Nickel <b>86402</b> | <b>M</b> 2700 | 219 - On req | <b>70</b> W.Flood - |
|                     | <b>W</b> 3000 | 233 - 167    |                     |
|                     | <b>N</b> 4000 | 249 - 178    |                     |

### Electronics

| 89147                                       | 99376                                       | 99105                                        | 99710                                                     | 99713                                                  | + driver 24V DC<br>99374 75W<br>99331 150W |
|---------------------------------------------|---------------------------------------------|----------------------------------------------|-----------------------------------------------------------|--------------------------------------------------------|--------------------------------------------|
| ON/OFF<br>1 - 2 art.<br>p 138 x l 22 x h 21 | ON/OFF<br>3 - 6 art.<br>p 138 x l 22 x h 21 | ON/OFF<br>6 - 12 art.<br>p 103 x l 58 x h 27 | 24V DC converter<br>0/1-10V 1 art.<br>p 138 x l 22 x h 21 | 24V DC converter<br>DALI 1 art.<br>p 138 x l 22 x h 21 |                                            |




| Efficiency - CRI 80 | Cct           | lm S - D     | Optic               |
|---------------------|---------------|--------------|---------------------|
| Nickel <b>83582</b> | <b>M</b> 2700 | 219 - On req | <b>70</b> W.Flood - |
|                     | <b>W</b> 3000 | 233 - 167    |                     |
|                     | <b>N</b> 4000 | 249 - 178    |                     |

## Quara\_Q | Path-marker | powerLED 2 W DC 630 mA



52



| Efficiency - CRI 80 | Cct           | lm S - D     | Optic               |
|---------------------|---------------|--------------|---------------------|
| Nickel <b>86564</b> | <b>M</b> 2700 | 219 - On req | <b>70</b> W.Flood - |
|                     | <b>W</b> 3000 | 233 - 167    |                     |
|                     | <b>N</b> 4000 | 249 - 178    |                     |

### Electronics

| 89147                                       | 99376                                       | 99105                                        | 99710                                                     | 99713                                                  | + driver 24V DC<br>99374 75W<br>99331 150W |
|---------------------------------------------|---------------------------------------------|----------------------------------------------|-----------------------------------------------------------|--------------------------------------------------------|--------------------------------------------|
| ON/OFF<br>1 - 2 art.<br>p 138 x l 22 x h 21 | ON/OFF<br>3 - 6 art.<br>p 138 x l 22 x h 21 | ON/OFF<br>6 - 12 art.<br>p 103 x l 58 x h 27 | 24V DC converter<br>0/1-10V 1 art.<br>p 138 x l 22 x h 21 | 24V DC converter<br>DALI 1 art.<br>p 138 x l 22 x h 21 |                                            |




| Efficiency - CRI 80 | Cct           | lm S - D     | Optic               |
|---------------------|---------------|--------------|---------------------|
| Nickel <b>83586</b> | <b>M</b> 2700 | 219 - On req | <b>70</b> W.Flood - |
|                     | <b>W</b> 3000 | 233 - 167    |                     |
|                     | <b>N</b> 4000 | 249 - 178    |                     |

## Recessed casing



| description                          | type       |
|--------------------------------------|------------|
| <b>98950</b> Recessed casing         | <b>PVC</b> |
| suitable for: Quara_R 1W/ Quara_Q 1W |            |



| description                           | type       |
|---------------------------------------|------------|
| <b>84338</b> Recessed casing          | <b>PVC</b> |
| suitable for: Quara_R 2W / Quara_Q 2W |            |



# quara


## Materials

Aluminium or AISI 316L  
stainless steel body





## Quara\_R | Path-marker | powerLED 2 W DC 630 mA




|           |              | Cct           | lm S - D  | Optic                     |
|-----------|--------------|---------------|-----------|---------------------------|
| White     | <b>85543</b> | <b>M</b> 2700 | 219 - 109 | <b>70</b> E.W.Flood(104°) |
| Grey      | <b>85542</b> | <b>W</b> 3000 | 233 - 116 |                           |
| DarkBrown | <b>87988</b> | <b>N</b> 4000 | 249 - 125 |                           |
| Sand      | <b>82512</b> |               |           |                           |

### Electronics

| 89420                                      | 99179                                       | 99186                                        | 83102                                      |
|--------------------------------------------|---------------------------------------------|----------------------------------------------|--------------------------------------------|
| ON/OFF<br>1 - 2 art.<br>p 65 x l 74 x h 27 | ON/OFF<br>3 - 6 art.<br>p 80 x l 100 x h 31 | ON/OFF<br>6 - 12 art.<br>p 92 x l 117 x h 38 | DALI<br>1 - 14 art.<br>p 54 x l 121 x h 26 |

### Recessed casing Pag. 9


## Quara\_R | Path-marker | 190-250 V AC | powerLED 2W DC - 2,7W AC



|           |              | Cct           | lm S - D  | Optic                     |
|-----------|--------------|---------------|-----------|---------------------------|
| White     | <b>83579</b> | <b>M</b> 2700 | 219 - 109 | <b>70</b> E.W.Flood(104°) |
| Grey      | <b>83580</b> | <b>W</b> 3000 | 233 - 116 |                           |
| DarkBrown | <b>83581</b> | <b>N</b> 4000 | 249 - 125 |                           |

### Recessed casing Pag. 9

## Quara\_R | Path-marker | 24 V DC | powerLED 1,5 W DC



|           |              | Cct           | lm S - D     | Optic             |
|-----------|--------------|---------------|--------------|-------------------|
| Steel     | <b>84075</b> | <b>M</b> 2700 | 188 - On req | <b>07</b> Asymm - |
| DarkBrown | <b>84076</b> | <b>W</b> 3000 | 199 - On req |                   |
| Brass     | <b>84077</b> | <b>N</b> 4000 | 213 - On req |                   |

### Electronics

| 89488                                       | 89179                                        | 89359                                         | 99332                                          | 99722                                      |
|---------------------------------------------|----------------------------------------------|-----------------------------------------------|------------------------------------------------|--------------------------------------------|
| ON/OFF<br>1 - 9 art.<br>p 80 x l 100 x h 31 | ON/OFF<br>1 - 15 art.<br>p 92 x l 117 x h 38 | ON/OFF<br>1 - 30 art.<br>p 115 x l 140 x h 50 | 0/1-10V<br>1 - 98 art.<br>p 150 x l 160 x h 35 | DALI<br>1 - 78 art.<br>p 191 x l 63 x h 38 |

### Recessed casing Pag. 9

## Quara\_RI | Path-marker | powerLED 2 W DC 630 mA



|       |              | Cct           | lm S - D | Optic                   |
|-------|--------------|---------------|----------|-------------------------|
| Steel | <b>92671</b> | <b>M</b> 2700 | 219 - 79 | <b>70</b> W.Flood (74°) |
|       |              | <b>W</b> 3000 | 233 - 84 |                         |
|       |              | <b>N</b> 4000 | 249 - 90 |                         |

### Electronics

| 89420                                      | 99179                                       | 99186                                        | 83102                                      |
|--------------------------------------------|---------------------------------------------|----------------------------------------------|--------------------------------------------|
| ON/OFF<br>1 - 2 art.<br>p 65 x l 74 x h 27 | ON/OFF<br>3 - 6 art.<br>p 80 x l 100 x h 31 | ON/OFF<br>6 - 12 art.<br>p 92 x l 117 x h 38 | DALI<br>1 - 14 art.<br>p 54 x l 121 x h 26 |

### Recessed casing Pag. 9

## Quara\_F | Path-marker | powerLED 1 W DC 350 mA



|       |              | Cct           | lm S - D | Optic                 |
|-------|--------------|---------------|----------|-----------------------|
| White | <b>86460</b> | <b>M</b> 2700 | 136 - 67 | <b>70</b> Flood (74°) |
|       |              | <b>W</b> 3000 | 145 - 71 |                       |
|       |              | <b>N</b> 4000 | 155 - 76 |                       |

### Electronics

| 89419                                      | 89421                                      | 99183                                        | 83100                                      |
|--------------------------------------------|--------------------------------------------|----------------------------------------------|--------------------------------------------|
| ON/OFF<br>1 - 2 art.<br>p 65 x l 74 x h 27 | ON/OFF<br>3 - 6 art.<br>p 65 x l 74 x h 27 | ON/OFF<br>6 - 12 art.<br>p 80 x l 100 x h 31 | DALI<br>1 - 14 art.<br>p 54 x l 121 x h 26 |

Recessed casing Pag. 9

## Quara\_F | Path-marker | powerLED 1 W DC 350 mA




|       |              | Cct           | lm S - D | Optic             |
|-------|--------------|---------------|----------|-------------------|
| White | <b>84078</b> | <b>M</b> 2700 | 136 - 67 | <b>70</b> Flood - |
|       |              | <b>W</b> 3000 | 145 - 71 |                   |
|       |              | <b>N</b> 4000 | 155 - 76 |                   |

### Electronics

| 89419                                      | 89421                                      | 99183                                        | 83100                                      |
|--------------------------------------------|--------------------------------------------|----------------------------------------------|--------------------------------------------|
| ON/OFF<br>1 - 2 art.<br>p 65 x l 74 x h 27 | ON/OFF<br>3 - 6 art.<br>p 65 x l 74 x h 27 | ON/OFF<br>6 - 12 art.<br>p 80 x l 100 x h 31 | DALI<br>1 - 14 art.<br>p 54 x l 121 x h 26 |

Recessed casing Pag. 9

## Quara\_Q | Path-marker | powerLED 2 W DC 630 mA



|           |              | Cct           | Im S - D  | Optic                     |
|-----------|--------------|---------------|-----------|---------------------------|
| White     | <b>86563</b> | <b>M</b> 2700 | 219 - 109 | <b>70</b> E.W.Flood(104°) |
| Grey      | <b>86562</b> | <b>W</b> 3000 | 233 - 116 |                           |
| DarkBrown | <b>87989</b> | <b>N</b> 4000 | 249 - 125 |                           |
| Sand      | <b>82513</b> |               |           |                           |

### Electronics

| 89420                                      | 99179                                       | 99186                                        | 83102                                      |
|--------------------------------------------|---------------------------------------------|----------------------------------------------|--------------------------------------------|
| ON/OFF<br>1 - 2 art.<br>p 65 x l 74 x h 27 | ON/OFF<br>3 - 6 art.<br>p 80 x l 100 x h 31 | ON/OFF<br>6 - 12 art.<br>p 92 x l 117 x h 38 | DALI<br>1 - 14 art.<br>p 54 x l 121 x h 26 |

### Recessed casing Pag. 9

## Quara\_QI | Path-marker | powerLED 2 W DC 630 mA




|       |              | Cct           | Im S - D | Optic                   |
|-------|--------------|---------------|----------|-------------------------|
| Steel | <b>92672</b> | <b>M</b> 2700 | 219 - 79 | <b>70</b> W.Flood (74°) |
|       |              | <b>W</b> 3000 | 233 - 84 |                         |
|       |              | <b>N</b> 4000 | 249 - 90 |                         |

### Electronics

| 89420                                      | 99179                                       | 99186                                        | 83102                                      |
|--------------------------------------------|---------------------------------------------|----------------------------------------------|--------------------------------------------|
| ON/OFF<br>1 - 2 art.<br>p 65 x l 74 x h 27 | ON/OFF<br>3 - 6 art.<br>p 80 x l 100 x h 31 | ON/OFF<br>6 - 12 art.<br>p 92 x l 117 x h 38 | DALI<br>1 - 14 art.<br>p 54 x l 121 x h 26 |

### Recessed casing Pag. 9


## Quara\_Q | Path-marker | 190-250 V AC | powerLED 2 W DC - 2,7 W AC



|           |              | Cct           | Im S - D  | Optic                     |
|-----------|--------------|---------------|-----------|---------------------------|
| White     | <b>83583</b> | <b>M</b> 2700 | 219 - 109 | <b>70</b> E.W.Flood(104°) |
| Grey      | <b>83584</b> | <b>W</b> 3000 | 233 - 116 |                           |
| DarkBrown | <b>83585</b> | <b>N</b> 4000 | 249 - 125 |                           |

### Recessed casing Pag. 9


## Quara\_QI | Path-marker | 198-264 V AC | powerLED 4 W DC - 4,8 W AC



|           |              | Cct           | Im S - D     | Optic                   |
|-----------|--------------|---------------|--------------|-------------------------|
| White     | <b>92238</b> | <b>M</b> 2700 | 438 - On req | <b>70</b> W.Flood (75°) |
| Grey      | <b>92239</b> | <b>W</b> 3000 | 466 - 267    |                         |
| DarkBrown | <b>92240</b> | <b>N</b> 4000 | 498 - 285    |                         |
| Sand      | <b>82514</b> |               |              |                         |

### Recessed casing Pag. 9


Recessed casing



| description                                                                            |                 | type |
|----------------------------------------------------------------------------------------|-----------------|------|
| <b>84338</b>                                                                           | Recessed casing | PVC  |
| <b>suitable for:</b> Quara_R 2W / Quara_RI 2W<br>Quara_F 1W / Quara_Q 2W / Quara_QI 2W |                 |      |



| description                       |                 | type |
|-----------------------------------|-----------------|------|
| <b>83155</b>                      | Recessed casing | PVC  |
| <b>suitable for:</b> Quara_F 0,7W |                 |      |



| description                      |                 | type |
|----------------------------------|-----------------|------|
| <b>98050</b>                     | Recessed casing | PVC  |
| <b>suitable for:</b> Quara_QI 4W |                 |      |



## Addresses

### **Linea Light HQ Italy**

via della Fornace, 59 z.i.  
31023 Castelmolin di Resana (TV) - Italy  
Phone: +39 0423 7868  
Fax: +39 0423 786900  
info@linealight.com

### **Linea Light Milano**

via Morimondo, 26 int. 17G  
20143 Milano - Italy  
Phone: +39 02 36750915  
Fax: +39 02 36750915  
milano@linealight.com

### **Linea Light Roma**

Via La Spezia, 34  
00182 Roma - Italy  
Phone: +39 06 68589134  
info@linealightroma.com

### **Linea Light UK**

Suite 109 - The Business Design Centre  
52 Upper Street - Islington N10QH  
London - UK  
Phone: +44 0203 6371983  
info@linealight-uk.com

### **Linea Light France**

Z.A. Heiden Est, 12 rue des Pays-Bas  
68310 Wittelsheim - France  
Phone: +33 389 75 52 23  
Fax: +33 389 75 59 07  
info@linealight.fr

### **Linea Light Deutschland**

Aktienstraße 214  
45473 Mülheim Ruhr - Germany  
Phone: +49 208 299979-0  
Fax: +49 208 299979-10  
service@linealight.de

### **Linea Light USA - Inter Lux**

3741 Commerce Drive  
Suites 306-308  
Baltimore, MD 21227 - USA  
Phone: +1 410 381 1497  
Fax: +1 410 381 1589  
answers@inter-lux.com

### **Linea Light Russia**

Design Center Artplay  
Nizhnyaya Syromyatnicheskaya 10/2 enter B,  
3rd floor, office 14  
105120 Moscow - Russia Federation  
Phone: +7 495 639 9941  
info@linealight.ru

### **Linea Light Spain**

C/ Longares, 48  
28022 Madrid - Spain  
Phone: +34 912534773  
info@linealight.es

### **Linea Light Singapore**

21 Kaki Bukit Place, 5th Fl.  
Eunos Techpark Singapore  
416199 Singapore  
Phone: +65-6908 5758  
info.sg@linealight.com

### **Linea Light GCC**


Jumeirah Lake Towers  
JBC2 - 35th Floor Cluster V - Dubai - UAE  
P.O. Box 125902  
Phone: +971 4 4218275  
Fax: +971 4 4218274  
info@linealight.ae

### **Linea Light Asia - Pacific**

No. 7, Nanyi Huayuan Road, Industry Avenue,  
528478 Xiaolan Town, Zhongshan City,  
Guangdong Province - China  
Phone: +86 760 87618355  
info@linealight.com.cn

**linealight.com**



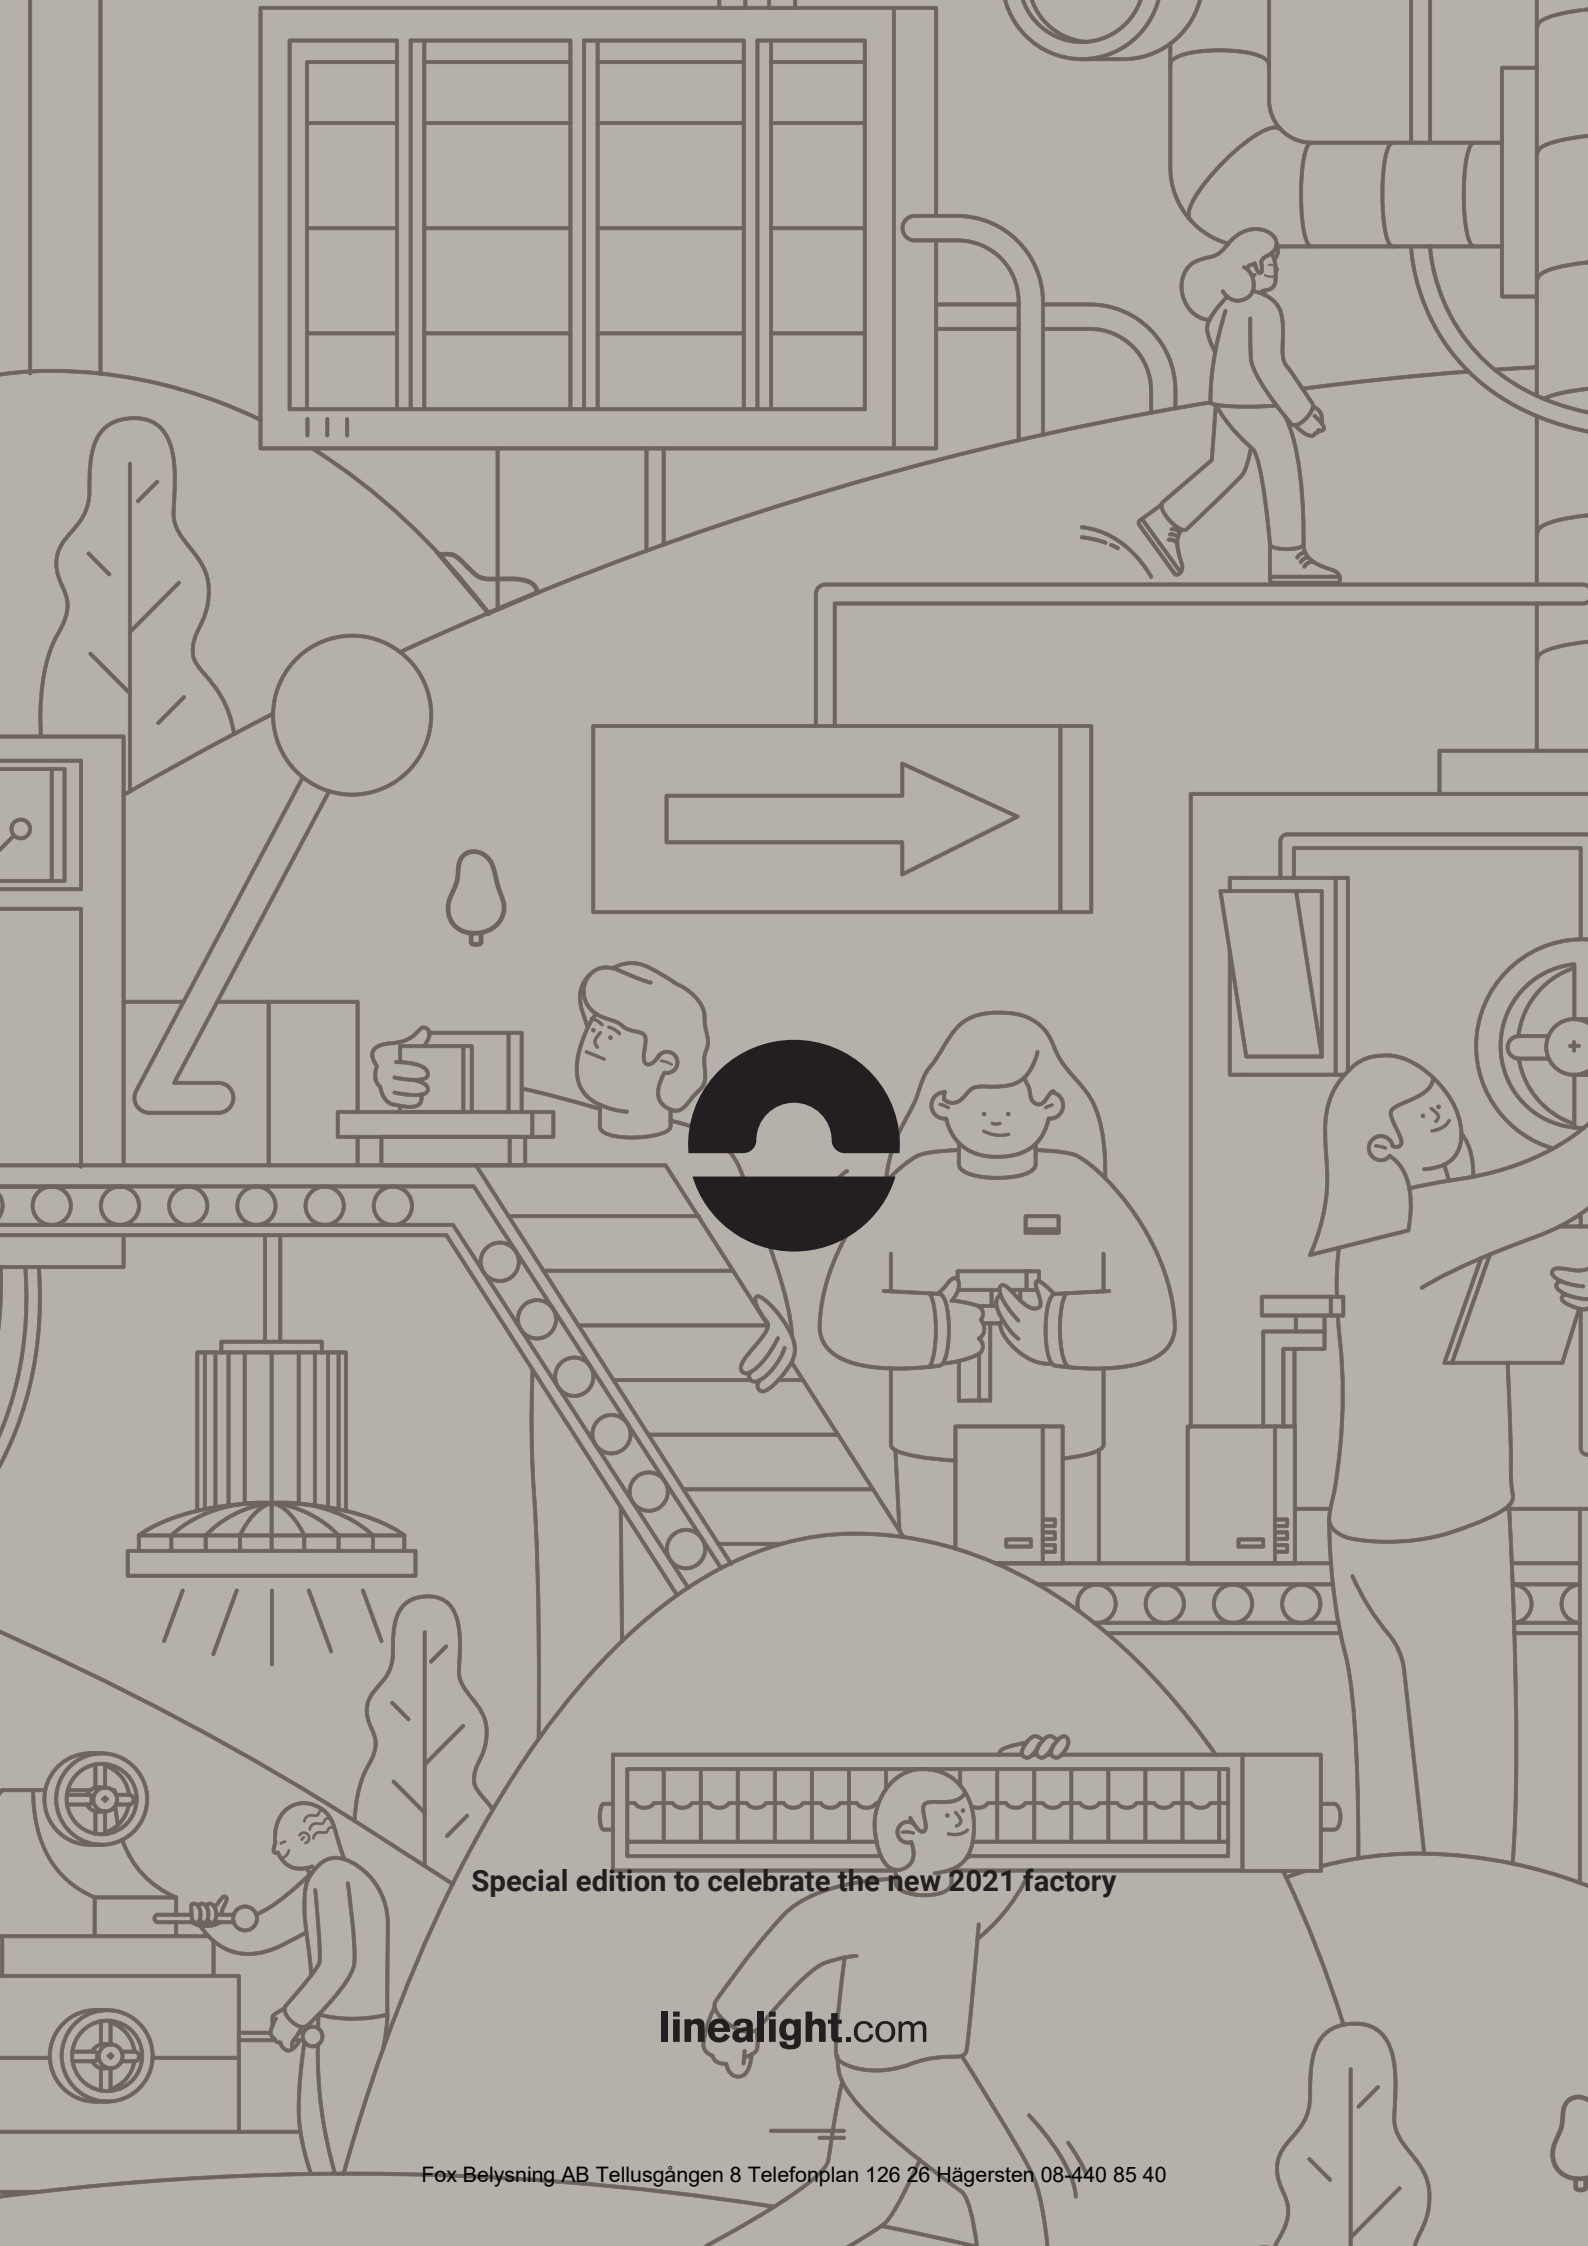

Special edition to celebrate the new 2021 factory

**linealight.com**