


# quara65





A drop of light in a small casing, with AquaStop® protection. Installed close to the ground, Quara65 projects a circular pool of light into the space below, and can be used to decorate steps and outdoor flooring details.

#### **Materials**

Aluminium or AISI 316 stainless steel body

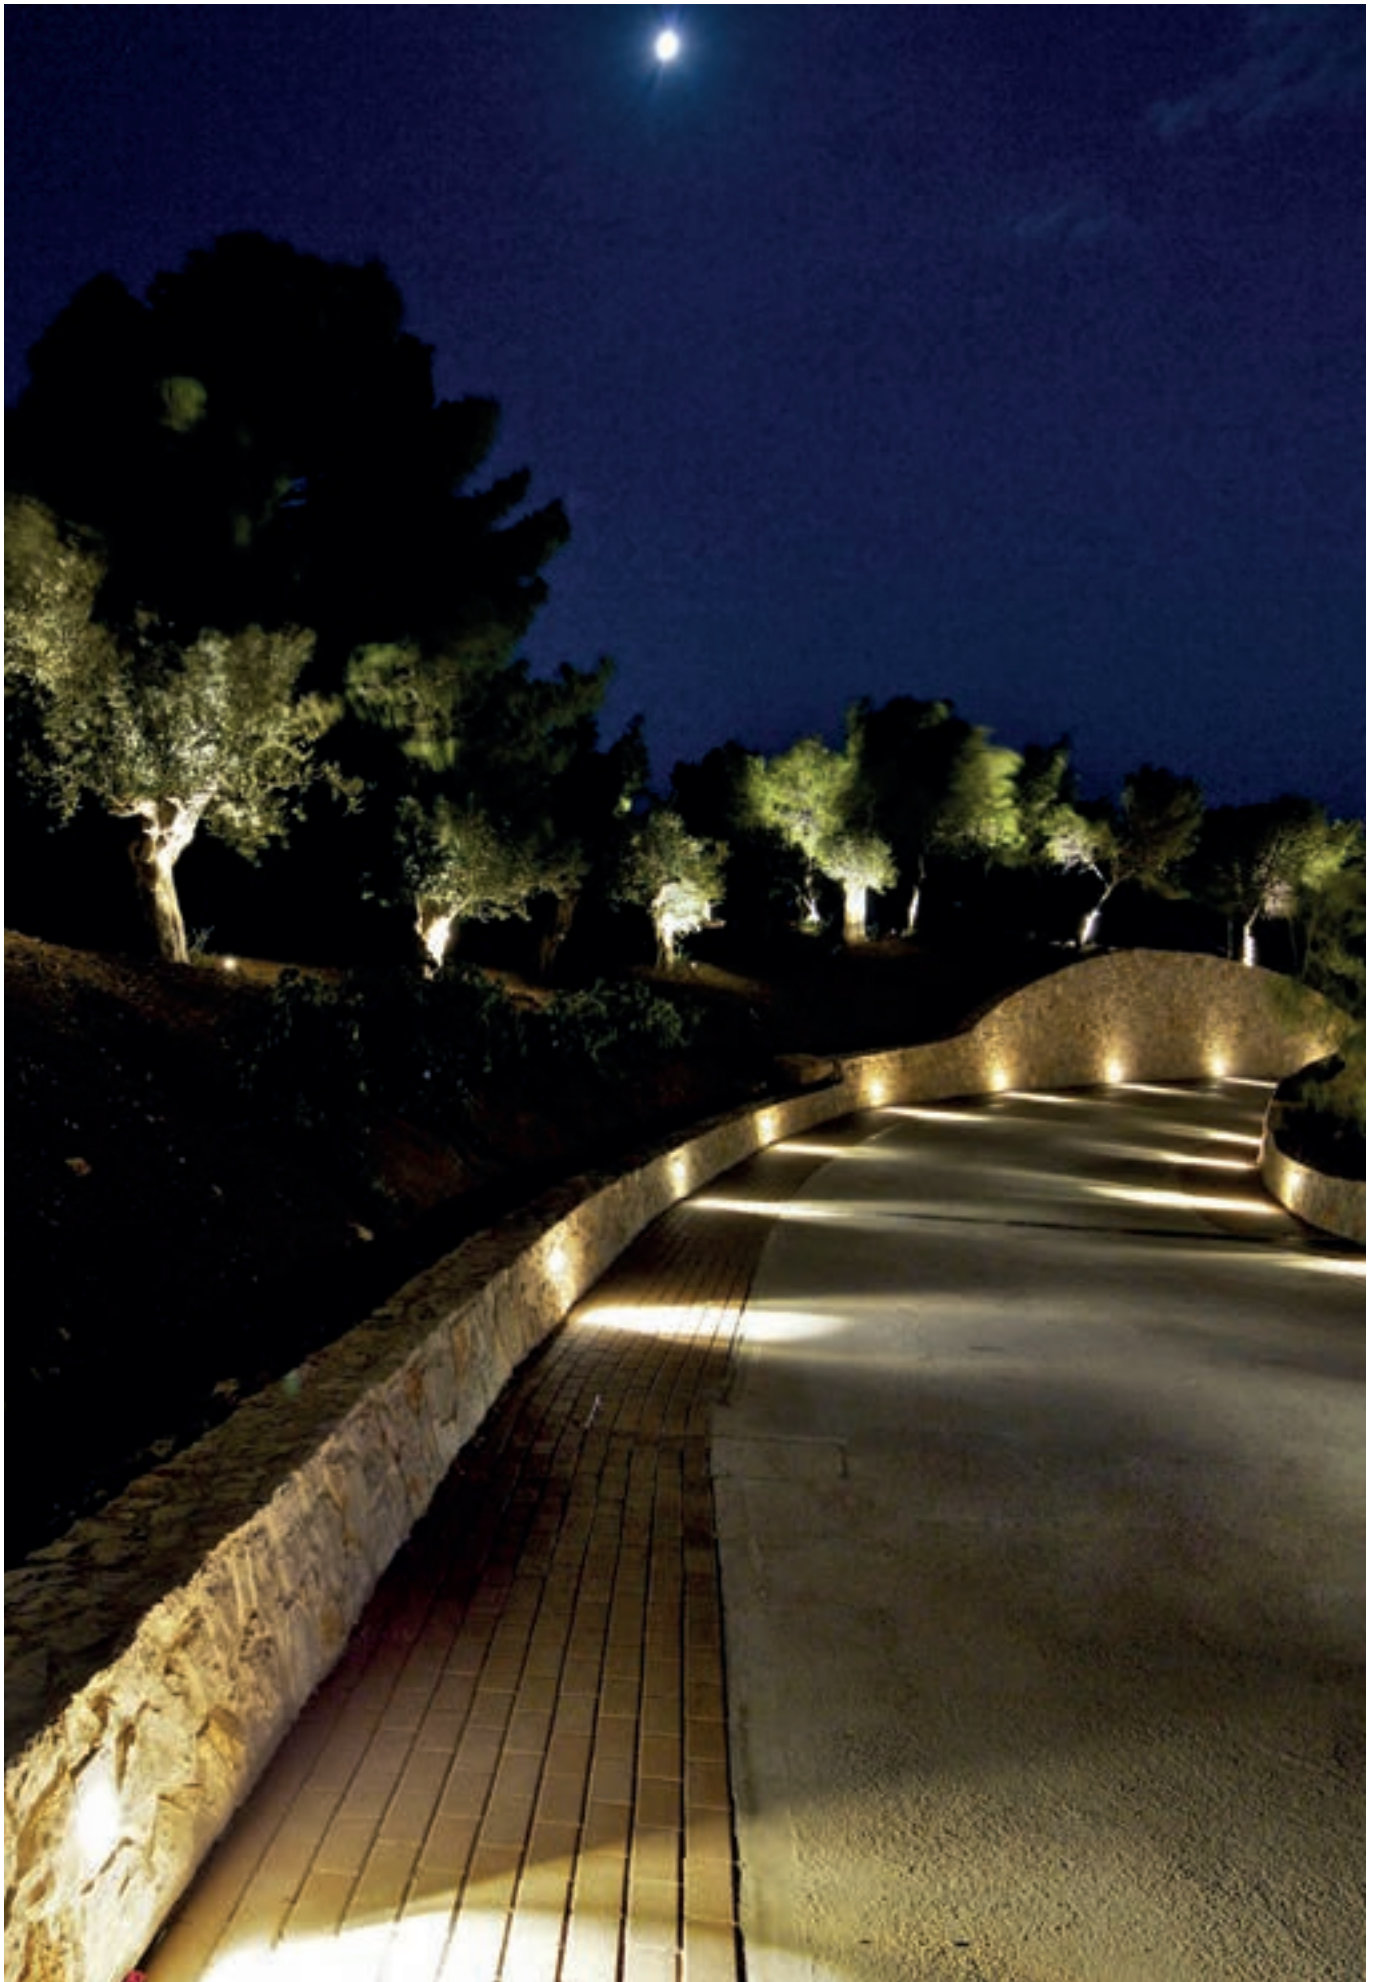

Quara65\_R | Path-marker | powerLED 2 W 630 mA



CRI 80

White	<b>85543</b>	2700 K	219 lm	<b>M</b>	Flood	<b>70</b>
Grey	<b>85542</b>	3000 K	233 lm	<b>W</b>		
Cor-Ten	<b>87988</b>	4000 K	249 lm	<b>N</b>		



**RTG 85543W70**  
**85542W70**

Electronics

Recessed casing



**89420**  
ON/OFF  
1 - 2 art.



**99179**  
ON/OFF  
3 - 6 art.




**99186**  
ON/OFF  
6 - 12 art.



**84338**

Quara65\_RI | Path-marker | powerLED 2 W 630 mA



CRI 80

Steel	<b>92671</b>	2700 K	219 lm	<b>M</b>	Flood	<b>70</b>
		3000 K	233 lm	<b>W</b>		
		4000 K	249 lm	<b>N</b>		



**RTG 92671W70**

Electronics

Recessed casing



**89420**  
ON/OFF  
1 - 2 art.



**99179**  
ON/OFF  
3 - 6 art.






**99186**  
ON/OFF  
6 - 12 art.



**84338**

Quara65\_F | Path-marker | powerLED 1 W 350 mA



CRI 80

White	<b>86460</b>	2700 K	145 lm	<b>M</b>	Flood	<b>70</b>
		3000 K	155 lm	<b>W</b>		
		4000 K	236 lm	<b>N</b>		



**RTG 86460W70**  
**86460N70**

Electronics

Recessed casing



**89419**  
ON/OFF  
1 - 2 art.




**89421**  
ON/OFF  
3 - 6 art.



**99183**  
ON/OFF  
6 - 12 art.



**84338**



1\_ Wall-drilled hole



2\_ Wall installation






3\_ Finished result



4\_ Flush-mounted installation

Quara65\_Q | Path-marker | powerLED 2 W 630 mA



CRI 80

White	<b>86563</b>	2700 K	219 lm	<b>M</b>	Flood	<b>70</b>
Grey	<b>86562</b>	3000 K	233 lm	<b>W</b>		
Cor-Ten	<b>87989</b>	3000 K	249 lm	<b>N</b>		



RTG **85563W70** **86562W70**  
**85563N70** **87989W70**

Electronics

Recessed casing



**89420**  
ON/OFF  
1 - 2 art.

**99179**  
ON/OFF  
3 - 6 art.

**99186**  
ON/OFF  
6 - 12 art.

**84338**

Quara65\_QI | Path-marker | powerLED 2 W 630 mA



CRI 80

Steel	<b>92672</b>	2700 K	219 lm	<b>M</b>	Flood	<b>70</b>
		3000 K	233 lm	<b>W</b>		
		4000 K	249 lm	<b>N</b>		



RTG **92672W70**

Electronics

Recessed casing




**89420**  
ON/OFF  
1 - 2 art.

**99179**  
ON/OFF  
3 - 6 art.

**99186**  
ON/OFF  
6 - 12 art.

**84338**

Quara65\_QI | Path-marker | 190-250 V | powerLED 4 W DC - 4,8 W AC

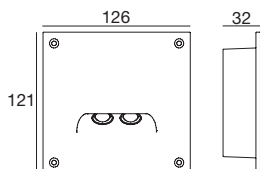

CRI 80

White	<b>92238</b>	2700 K	438 lm	<b>M</b>	Flood	<b>70</b>
Grey	<b>92239</b>	3000 K	466 lm	<b>W</b>		
Cor-Ten	<b>92240</b>	4000 K	498 lm	<b>N</b>		



RTG **92238W70**  
**92239W70**  
**92240W70**

Recessed casing



**98050**