




skin

Materials


Aluminium body

Tempered glass diffuser

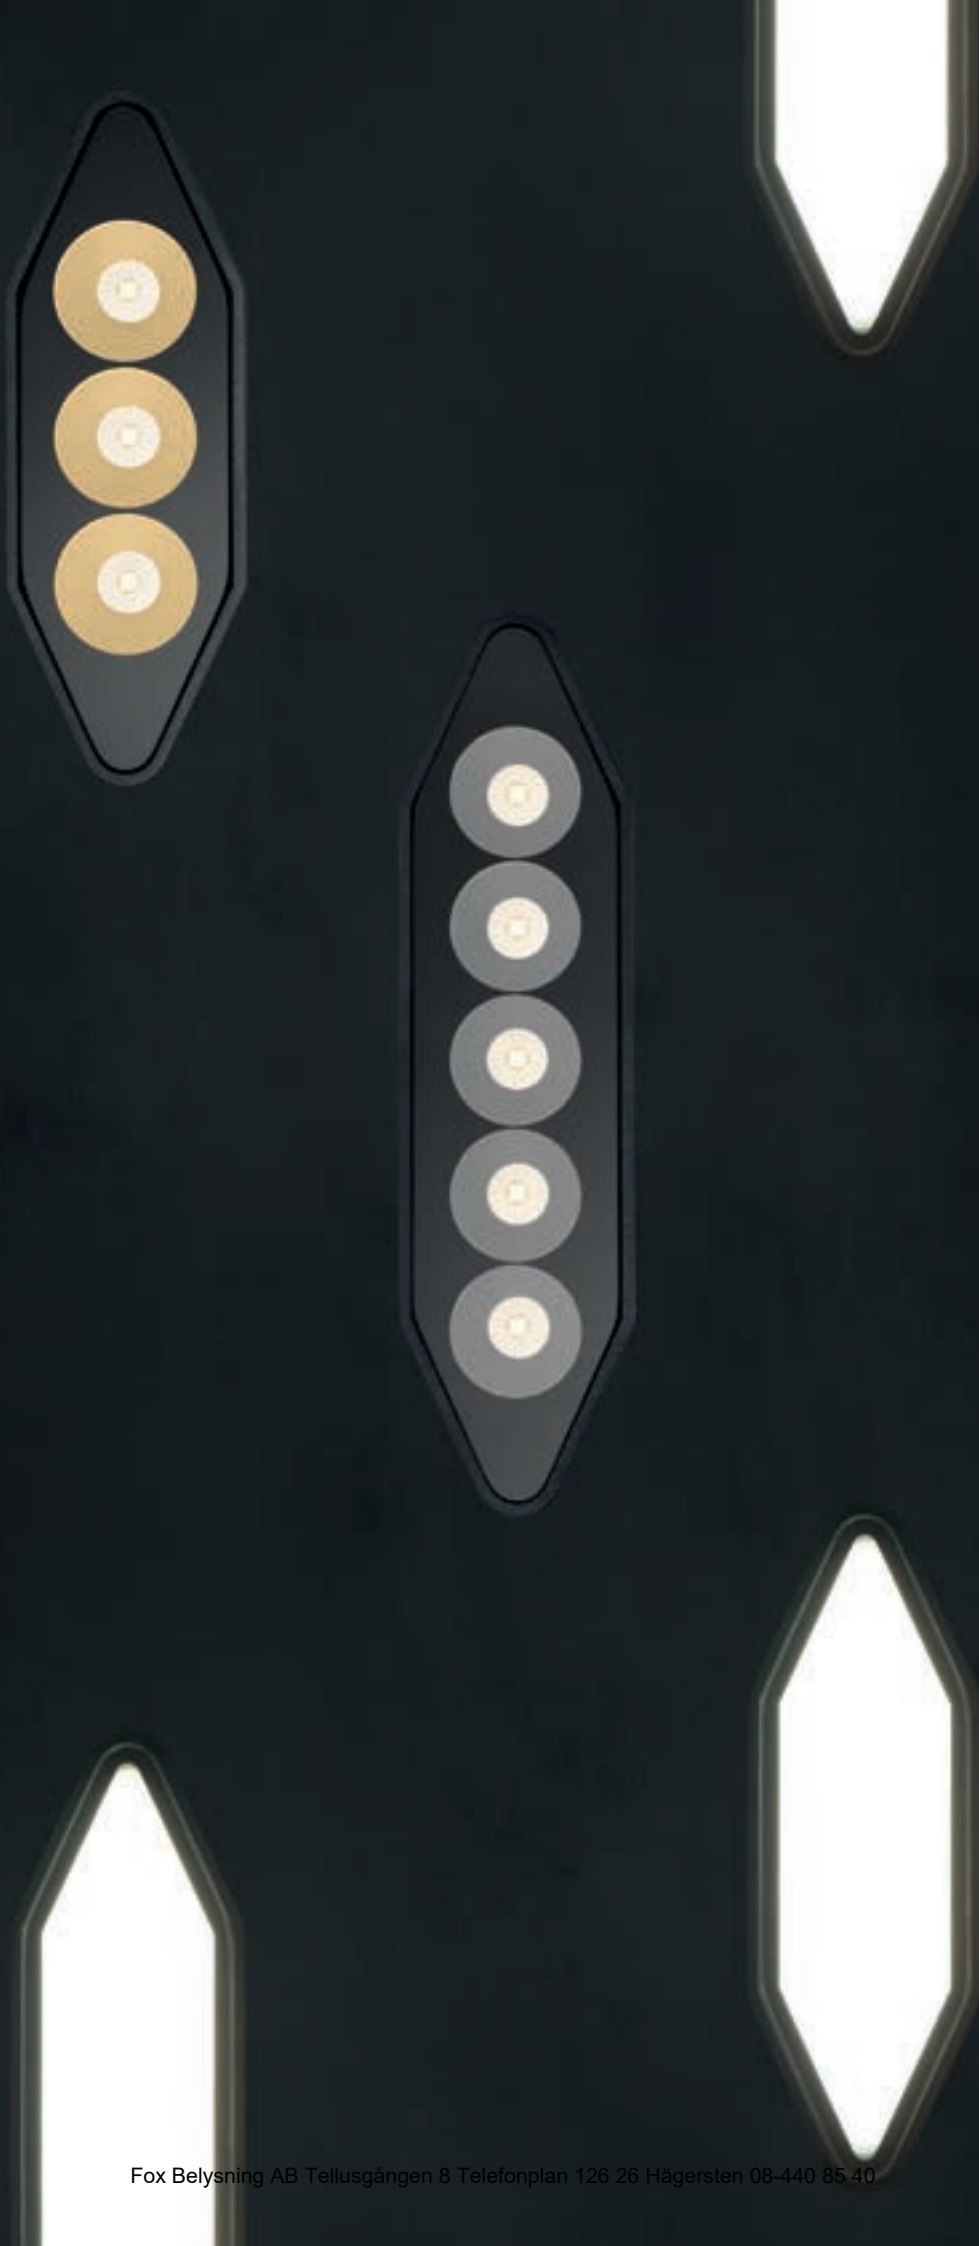

skin range

design Joerg Krewinkel

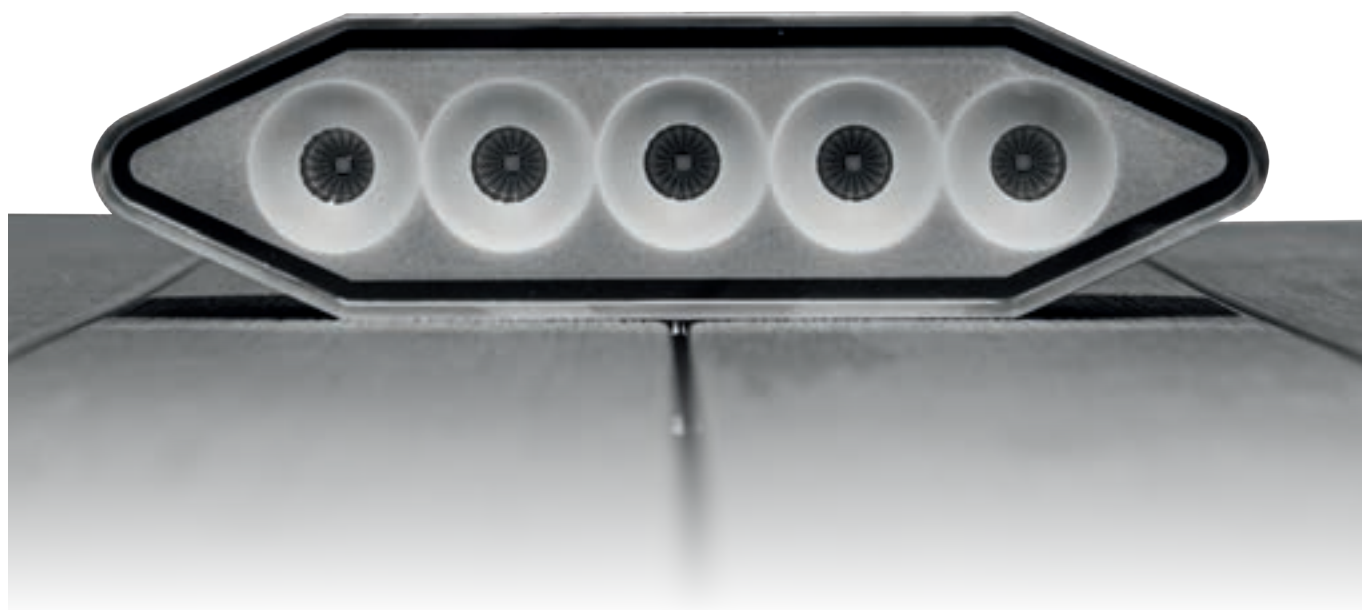

Skin_FL
Frameless Opaline



Skin_S
Surface



Skin_F
Frameless



Skin_Y
Asymmetric

	Skin_FL Frameless Opaline	Skin_S Surface	Skin_F Frameless	Skin_Y Asymmetric
2,1 W	166 x 57 mm	-	-	-
3,2 W	220 x 57 mm	-	-	-
6 W	-	166 x 57 mm	166 x 57 mm	-
9,6 W	-	166 x 57 mm	166 x 57 mm	-
10 W	-	220 x 57 mm	220 x 57 mm	-
12,2 W	-	-	-	220 x 57 mm
16,2 W	-	220 x 57 mm	220 x 57 mm	-
Finish	Black	Wh Bk	Black Bk Gold	Black
powerLED	-	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K
topLED	2700K 3000K 4000K	-	-	-
Optics	General	Spot Food W.Flood	Spot Food W.Flood	Asymmetric
Driver	On/Off	On/Off	On/Off	On/Off

Beautiful and functional Skin

Skin is an innovative outdoor (IP67), versatile and modular lighting fixture. The brand new elongated hexagonal shape makes it easy to create continuous linear compositions, suitable for following and lighting the complex or misaligned silhouettes of modern architecture. This product can be used in various configurations: recess-mounted flush with the pavement, wall or ceiling-mounted, semi-recessed or surface-mounted. Skin's great versatility also spills over into the controlled-luminance optics available in various finishes. The structure is made of aluminium in embossed black finish, elegant and universal, perfect for any environment when it is exposed. The two types of recessed casings, one conceived for floor installation and the other for cast or plasterboard ceiling installation, contain a high-performance lighting machine with multiple sources and power variations.




Downlight
Recessed or surface mounted
Opal cells
Frosted glass
3/5 cells version



Downlight or uplight
Recessed or surface mounted
Black cells
Black silk-screened glass
3/5 cells version



Downlight or uplight
Recessed or surface mounted
Metal-finish cells
Black silk-screened glass




Downlight or uplight
Recessed or surface mounted
Opal glass



Downlight or uplight
Recessed or surface mounted
Gold cells
Black silk-screened glass
3/5 cells version

Installation flexibility and camouflage

Skin can be set up in different solutions designed to meet any design needs. The advantages include the possibility of semi-recessed mounting, a solution that leaves only the thickness of the glass exposed, adding a soft diffusion of light onto the surface it is installed on to the emission with precision optics, an absolutely elegant and clean solution, making the product almost invisible, allowing only the light to emerge, essential material for construction of an architecture. The glass diffuser is available in three versions: with ceramic-based painting for a path-marker effect with integrated anti-slip, transparent with optics or with frosted glass in the semi-recessed version.

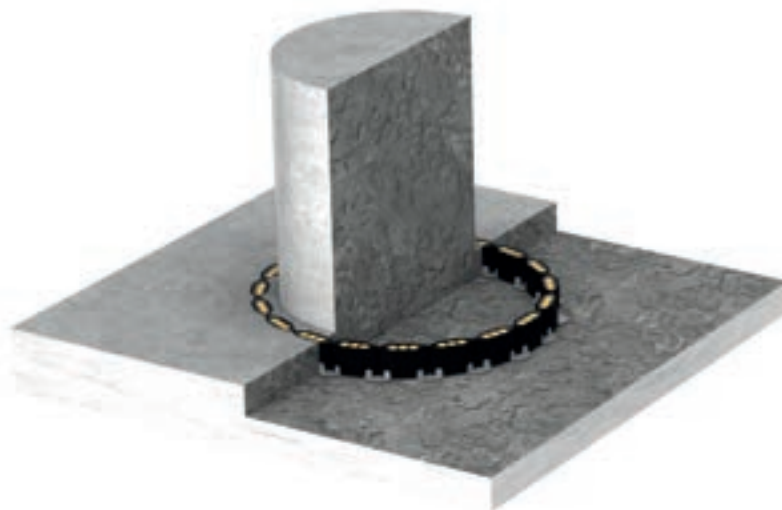

Variety of optics


Skin is available with 3 or 5 sources (length: 166 and 220 mm) and various optics: spot, flood and wide flood, asymmetric wall-washer and path-marker with anti-slip white diffuser, power settings that range from 2.1W to 16,2W. A complete technological package, designed to meet all the needs of even the most demanding designer.



Spot




Flood



W.Flood




General



Asymmetric



Skin_FL | Lines | 176-276 V AC | topLED | 4 W D



3,2 W DC - 3,8 W AC	Cct	lm S - D	Optic
Black 83872	M 2700	381 - On req	00 General -
	W 3000	399 - On req	
	N 4000	413 - On req	

Recessed casing Pag. 769

Skin_S | Lines | 176-240 V AC | powerLEDs




10 W DC - 11,2 W AC	Cct	lm S - D	Optic
Wh Bk 83871	M 2700	1330 - On req	15 Spot -
	W 3000	1420 - On req	30 Flood -
	N 4000	1515 - On req	45 W.Flood -

16,2 W DC - 18 W AC	Cct	lm S - D	Optic
Wh Bk 83868	M 2700	2016 - On req	15 Spot -
	W 3000	2016 - On req	30 Flood -
	N 4000	2177 - On req	45 W.Flood -

Recessed casing Pag. 769

Skin_F | Lines | 176-240 V AC | powerLEDs




10 W DC - 11,2 W AC	Cct	lm S - D	Optic
Black 83869	M 2700	1330 - On req	15 Spot -
Bk Gold 83870	W 3000	1420 - On req	30 Flood -
	N 4000	1515 - On req	45 W.Flood -

16,2 W DC - 18 W AC	Cct	lm S - D	Optic
Black 83866	M 2700	2016 - On req	15 Spot -
Bk Gold 83867	W 3000	2016 - On req	30 Flood -
	N 4000	2177 - On req	45 W.Flood -


Recessed casing Pag. 769

Skin_Y | Lines | 176-240 V AC | powerLEDs




12,2 W DC - 14 W AC	Cct	lm S - D	Optic
Black 83873	M 2700	1584 - On req	07 Asymm. -
	W 3000	1700 - On req	
	N 4000	1834 - On req	

Recessed casing Pag. 769

Skin_FL | Lines | 176-276 V AC | topLED | 2,1 W DC


2,1 W DC - 2,5 W AC	Cct	lm S - D	Optic
Black 83865	M 2700	254 - On req	00 General -
	W 3000	266 - On req	
	N 4000	275 - On req	


Recessed casing Pag. 769

Skin_F | Lines | 176-276 V AC | powerLEDs


6 W DC - 6,7 W AC	Cct	lm S - D	Optic
Black 83859	M 2700	798 - On req	15 Spot -
Bk Gold 83860	W 3000	852 - On req	30 Flood -
	N 4000	909 - On req	45 W.Flood -

9,6 W DC - 11 W AC	Cct	lm S - D	Optic
Black 83862	M 2700	1210 - On req	15 Spot -
Bk Gold 83863	W 3000	1210 - On req	30 Flood -
	N 4000	1306 - On req	45 W.Flood -

Recessed casing Pag. 769

Skin_S | Lines | 176-276 V AC | powerLEDs


6 W DC - 6,7 W AC	Cct	lm S - D	Optic
Wh Bk 83864	M 2700	798 - On req	15 Spot -
	W 3000	852 - On req	30 Flood -
	N 4000	909 - On req	45 W.Flood -

9,6 W DC - 11 W AC	Cct	lm S - D	Optic
Wh Bk 83861	M 2700	1210 - On req	15 Spot -
	W 3000	1210 - On req	30 Flood -
	N 4000	1306 - On req	45 W.Flood -

Recessed casing Pag. 769

Recessed casing


Recessed casing
for concrete

description

83123 Recessed casing 175 mm

suitable for: Skin 166 mm

83124 Recessed casing 229 mm

suitable for: Skin 220mm



Recessed casing
for plasterboard
ceilings

description

83125 Recessed casing 175 mm

suitable for: Skin 166 mm

83126 Recessed casing 229 mm

suitable for: Skin 220mm