



MAESTRO 3.0

PROFESSIONAL
ARCHITECTURAL
LIGHTING

Suelo

i-LÉD


suelo

Materials

Aluminium body


Brass body

AISI 316L stainless steel flange

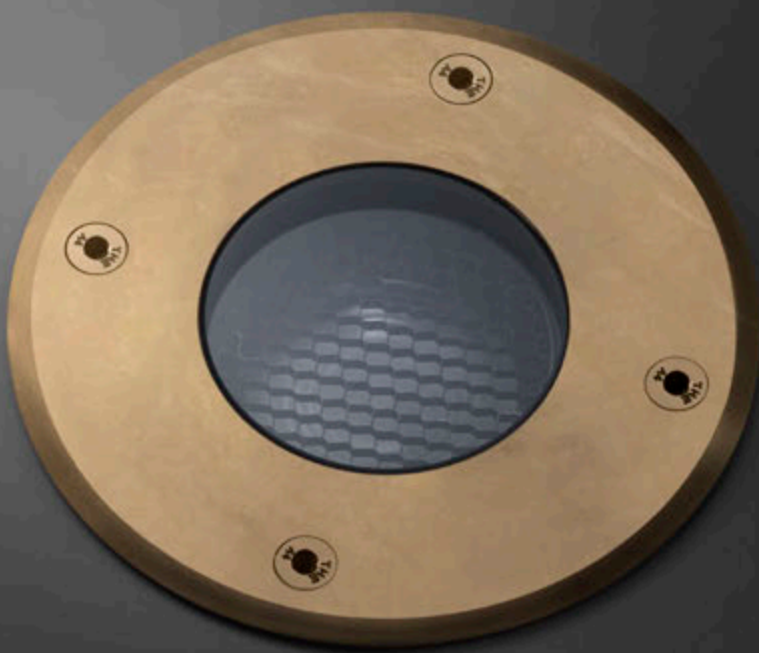



suelo range

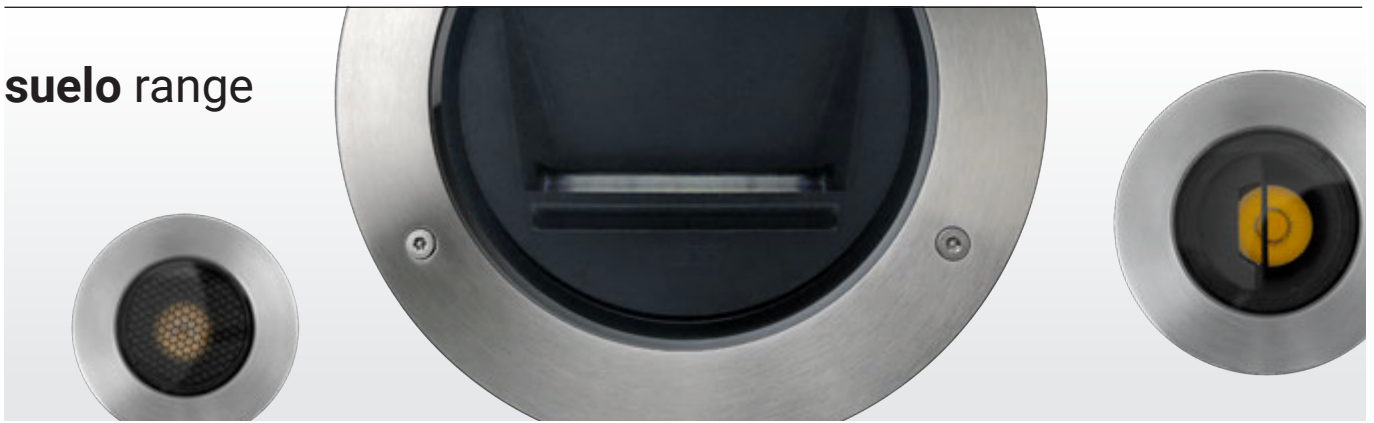

	Suelo_R Round Suelo_RJ Round adjustable	Suelo_R PRO Round Suelo_RJ PRO Round adjustable	Suelo Focus Round Suelo_I Focus Round	Suelo_RX PRO Round adjustable with screws	Suelo Brass Round with screws	Suelo_RX Round Suelo_RXJ Round adjustable	Suelo_RDX Double optics adjustable	Suelo_RF Round Suelo_RFJ Round adjustable	Suelo Telescopic
1W - 1,5W	Ø 25 mm	Ø 25 mm	-	-	-	-	-	-	-
2W - 2,5W	Ø 30 mm	Ø 35 mm	-	Ø 50 mm	-	-	-	-	-
4W - 5W	Ø 64 mm (RJ) Ø 64 mm	Ø 64 mm	-	-	-	-	-	-	-
8W - 9W	Ø 92 mm	Ø 92 mm (RJ PRO) Ø 92 mm	Ø 97 mm Ø 85 mm	Ø 112 mm	Ø 120 mm	Ø 112 mm (RXJ) Ø 112 mm	-	-	-
12W	-	-	-	-	-	-	Ø 170 mm	-	Ø 200 mm
13W	-	-	-	Ø 170 mm	-	Ø 170 mm (RXJ) Ø 170 mm	-	-	-
24W - 26W	-	-	-	-	-	Ø 232 mm	Ø 232 mm	-	Ø 200 mm
30W	-	-	-	-	-	Ø 232 mm (RXJ) Ø 232 mm	-	-	-
37W - 44,2W	-	-	-	-	-	Ø 315 mm (RXJ) Ø 315 mm	-	Ø 308 mm (RFJ) Ø 308 mm	-
Finish	Steel Steel/Alu Steel/Br Brass/Alu	Steel Steel/Alu Steel/Br Brass/Alu	Steel/Alu	Steel/Alu Brass/Alu	Brass	Steel/Alu Brass/Alu	Steel/Alu	Steel/Alu	DarkBrown
Accessories	HC	HC DL	-	HC DL	HC	HC DL	-	HC DL	-
Cct	2700K 3000K 4000K RGBW	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K RGBW	2700K 3000K 4000K	2700K 3000K 4000K RGBW	2700K 3000K 4000K
Optics	N.Spot Spot Flood W.Flood Elliptic E.W.Flood General Asymm.	N.Spot Spot Flood W.Flood	Adjustable	N.Spot Spot Flood W.Flood	N.Spot Spot Flood W.Flood	N.Spot Spot Flood W.Flood Elliptic E.W.Flood General Asymm.	Spot Flood W.Flood	Spot Flood W.Flood	Spot Flood W.Flood
Driver 	On/Off 0/1-10V DALI - DMX	On/Off 0/1-10V DALI	-	On/Off 0/1-10V DALI	-	On/Off 0/1-10V DALI - DMX	-	-	-
Driver 	On/Off	On/Off	On/Off	On/Off	On/Off	On/Off DALI	On/Off	On/Off DALI - DMX	On/Off
Current	C.C. C.V.	C.C. C.V.	-	C.C. C.V.	-	C.C. C.V.	-	-	-

The range

The Suelo family offers a variety of solutions for every design need: fixed and swivel versions, small-flanged flush-mount uplights, and dimmer units using the DALI protocol. There are pro models with recessed optics and RGBW sources, and beam control filters. All models have exclusive AquaStop® protection systems, and there are versions with 24-volt cable converters.

Suelo can be used with a honeycomb filter, which screens secondary light and reduces dazzle, maintaining a high-quality diffuse light. A darklight filter directs the illumination onto one part of the wall by sectioning one part of the beam, and prevents dazzle even close to the source. For full beam control and a drastically reduced dazzle risk, choose the Suelo PRO versions, in which the recessed source increases the screening angle, totally skimming off the secondary flow to give a cleaner, more concentrated and efficient light.




New Ø 31,5 cm version

The evolution of the Suelo family includes a new 315 mm diameter, 44,2 W version that improves it in terms of performance. In addition to the optics range that sets all Suelo units apart, the new version is characterised by extremely easy installation through the use of the recessed casing designed to be able adjust the inclination of the horizontal axis and, without accessing the inside of the optics chamber, the vertical axis (EAS™ pag 579). Suelo was also designed to house the power supply and control unit inside the body of the product, which guarantees a high grade of protection at IP67.




Performance and control

There are nine outputs to choose from, ranging from 1 to 44,2 watts, three colour temperatures including warm light at 2700 and 3000K, and daylight at 4000K. The uniquely wide spectrum of optics includes an elliptic, a wall wash for high, narrow walls, and an asymmetric version that gives an even, homogenous wash.

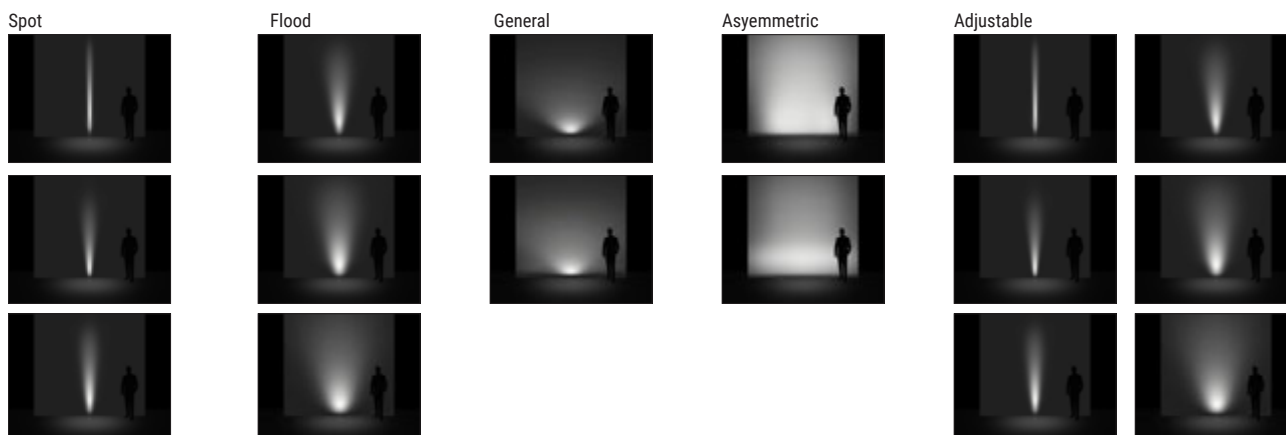

Suelo_R | Up-Light | powerLED




C.C. 1W DC - 350mA		Cct	lm S - D	Optic
Steel	80432	M 2700	136 - 104	20 Flood (26°)
		W 3000	145 - 111	35 Flood (36°)
		N 4000	155 - 119	

Electronics

89419	89421	99183	83100
ON/OFF 1 - 2 art. p 65 x l 74 x h 27	ON/OFF 3 - 6 art. p 65 x l 74 x h 27	ON/OFF 6 - 12 art. p 80 x l 100 x h 31	DALI 1 - 14 art. p 54 x l 121 x h 26

Recessed casing Pag. 27

Suelo_R Pro | Up-Light | powerLED



C.C. 1 W DC - 350mA		Cct	lm S - D	Optic
Steel	80433	M 2700	136 - 96	20 Spot (23°)
Brass St	82527	W 3000	145 - 102	35 Flood (34°)
		N 4000	155 - 110	

Electronics

89419	89421	99183	83100
ON/OFF 1 - 2 art. p 65 x l 74 x h 27	ON/OFF 3 - 6 art. p 65 x l 74 x h 27	ON/OFF 6 - 12 art. p 80 x l 100 x h 31	DALI 1 - 14 art. p 54 x l 121 x h 26


C.V. 1,5W DC - 24 V DC		Cct	lm S - D	Optic
Steel	80434	M 2700	136 - 96	20 Spot (23°)
Brass St	82528	W 3000	145 - 102	35 Flood (34°)
		N 4000	155 - 110	

Electronics

89488	89179	89359	99332	99722
ON/OFF 1 - 9 art. p 80 x l 100 x h 31	ON/OFF 1 - 15 art. p 92 x l 117 x h 38	ON/OFF 1 - 30 art. p 115 x l 140 x h 50	0/1-10V 1 - 98 art. p 150 x l 60 x h 35	DALI 1 - 78 art. p 191 x l 63 x h 38

Recessed casing Pag. 27

Suelo_R | Up-Light | powerLED




C.C. 2W DC - 630mA	Cct	lm S - D	Optic
Chrome 93141	M 2700	219 - 131	08 N.Spot (10°)
	W 3000	233 - 148	15 Spot (21°)
	N 4000	249 - 159	30 Flood (26°)
			60 W.Flood (57°)
			12 E.W.Flood(91°)
			00 General -

Electronics

89420	99179	99186	83102
ON/OFF 1 - 2 art. p 65 x l 74 x h 27	ON/OFF 3 - 6 art. p 80 x l 100 x h 31	ON/OFF 6 - 12 art. p 92 x l 117 x h 38	DALI 1 - 14 art. p 54 x l 121 x h 26

Recessed casing Pag. 27

Suelo_R Pro | Up-Light | powerLED

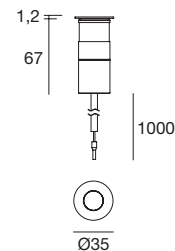

C.C. 2W DC - 630mA	Cct	lm S - D	Optic
Steel Alu 80439	M 2700	219 - 120	15 Spot (22°)
Brass Alu 82529	W 3000	233 - 137	30 Flood (28°)
	N 4000	249 - 147	60 W.Flood (54°)
			88 Elliptic -
			00 General -

C.C. 2W DC - 630mA HC	Cct	lm S - D	Optic
Steel Alu 80440	M 2700	219 - 76	15 Spot (19°)
Brass Alu 82530	W 3000	233 - 85	30 Flood (25°)
	N 4000	249 - 91	60 W.Flood (44°)

Electronics

89420	99179	99186	83102
ON/OFF 1 - 2 art. p 65 x l 74 x h 27	ON/OFF 3 - 6 art. p 80 x l 100 x h 31	ON/OFF 6 - 12 art. p 92 x l 117 x h 38	DALI 1 - 14 art. p 54 x l 121 x h 26

C.V. 2,5W DC - 24 V DC	Cct	lm S - D	Optic
Steel Alu 80441	M 2700	219 - 120	15 Spot (22°)
Brass Alu 82531	W 3000	233 - 137	30 Flood (28°)
	N 4000	249 - 147	60 W.Flood (54°)
			88 Elliptic -
			00 General -



C.V. 2,5 W DC - 24 V DC HC	Cct	lm S - D	Optic
Steel Alu 80442	M 2700	219 - 76	15 Spot (19°)
Brass Alu 82532	W 3000	233 - 86	30 Flood (25°)
	N 4000	249 - 91	60 Flood (44°)

Electronics

89488	89179	89359	99332	99722
ON/OFF 1 - 5 art. p 80 x l 100 x h 31	ON/OFF 1 - 9 art. p 92 x l 117 x h 38	ON/OFF 1 - 18 art. p 115 x l 140 x h 50	0/1-10V 1 - 56 art. p 150 x l 160 x h 35	DALI 1 - 45 art. p 191 x l 163 x h 38

Recessed casing Pag. 27

Suelo_R | Up-Light | powerLED

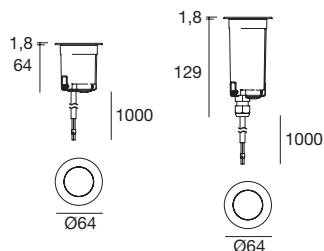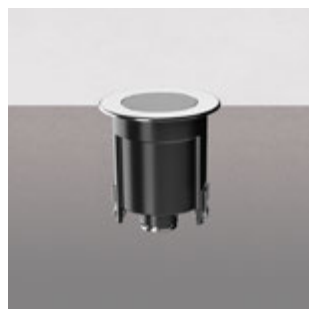

81089/81090

C.C. 4W DC - 350mA	Cct	Im S - D	Optic
Steel/Alu 80443	M 2700	490 - 360	10 Spot (11°)
	W 3000	490 - 360	20 Spot (20°)
	N 4000	529 - 389	30 Flood (30°)
			60 W.Flood (60°)
			88 Elliptic -
			12 E.W.Flood(86°)
			00 General -

C.C. 4W DC - 350mA	Cct	Im S - D	Optic
Steel/Alu 81089	M 2700	490 - 259	07 Asymm. -
	W 3000	490 - 259	
	N 4000	529 - 280	

C.C. 4W DC - 350mA	Cct	Im-S	Im-S	Optic
Steel/Alu 80444	M 2700	490 - 205		20 Spot (15°)
	W 3000	490 - 205		30 Flood (25°)
	N 4000	529 - 221		60 Flood (42°)

Electronics

89421	99183	83100
ON/OFF 1 art. p 65 x l 74 x h 27	ON/OFF 2 - 3 art. p 80 x l 100 x h 31	DALI 1 - 4 art. p 54 x l 121 x h 26

C.V. 5W DC - 24 V DC	Cct	Im S - D	Optic
Steel/Alu 80445	M 2700	490 - 360	10 Spot (11°)
	W 3000	490 - 360	20 Spot (20°)
	N 4000	529 - 389	30 Flood (30°)
			60 W.Flood (60°)
			88 Elliptic -
			12 E.W.Flood(86°)
			00 General -

C.V. 5W DC - 24 V DC	Cct	Im S - D	Optic
Steel/Alu 81090	M 2700	490 - 259	07 Asymm. -
	W 3000	490 - 259	
	N 4000	529 - 280	


C.V. 5W DC - 24 V DC	Cct	Im S - D	Optic
Steel/Alu 80446	M 2700	490 - 205	20 Spot (15°)
	W 3000	490 - 205	30 Flood (25°)
	N 4000	529 - 221	60 Flood (42°)

Electronics

89488	89179	89359	99332	99722
ON/OFF 1 - 2 art. p 80 x l 100 x h 31	ON/OFF 1 - 4 art. p 92 x l 117 x h 38	ON/OFF 1 - 9 art. p 115 x l 140 x h 50	0/1-10V 1 - 9 art. p 150 x l 60 x h 35	DALI 1 - 23 art. p 191 x l 63 x h 38

Recessed casing Pag. 27

Suelo_R | Up-Light | 198-264 V AC | powerLED 4 W DC - 5 W AC

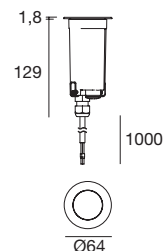


Cct	Im S - D	Optic	
Steel/Alu 80447	M 2700	490 - 360	10 Spot (11°)
	W 3000	490 - 360	20 Spot (20°)
	N 4000	529 - 389	30 Flood (30°)
			60 W.Flood (60°)
			88 Elliptic -
			12 E.W.Flood(86°)
			00 General -

Cct	Im S - D	Optic	
Steel/Alu 80448	M 2700	490 - 205	20 Spot (15°)
	W 3000	490 - 205	30 Flood (25°)
	N 4000	529 - 221	60 Flood (42°)

Recessed casing Pag. 27

Suelo_R Pro | Up-Light | powerLED

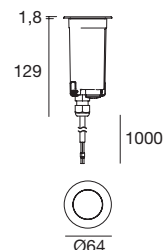

C.C. 4W DC - 350mA	Cct	Im S - D	Optic
Steel/Alu 80449	M 2700	490 - 207	20 Spot (16°)
C.C. 4W DC - 350mA	W 3000	490 - 207	30 Flood (29°)
Steel/Alu 80450	N 4000	529 - 222	50 W.Flood (49°)
C.C. 4W DC - 350mA	DL		
Steel/Alu 80451			

Electronics

89421	99183	83100
ON/OFF 1 art. p 65 x l 74 x h 27	ON/OFF 2 - 3 art. p 80 x l 100 x h 31	DALI 1 - 4 art. p 54 x l 121 x h 26


C.V. 5W DC - 24 V DC	Cct	Im S - D	Optic
Steel/Alu 80452	M 2700	490 - 207	20 Spot (16°)
C.V. 5W DC - 24 V DC	W 3000	490 - 207	30 Flood (29°)
Steel/Alu 80453	N 4000	529 - 222	50 W.Flood (49°)
C.V. 5W DC - 24 V DC	DL		
Steel/Alu 80454			

Electronics

89488	89179	89359	99332	99722
ON/OFF 1 - 2 art. p 80 x l 100 x h 31	ON/OFF 1 - 4 art. p 92 x l 117 x h 38	ON/OFF 1 - 9 art. p 115 x l 140 x h 50	0/1-10V 1 - 29 art. p 150 x l 60 x h 35	DALI 1 - 23 art. p 191 x l 63 x h 38

Recessed casing Pag. 27

Suelo_RJ | Up-Light | powerLED



C.C. 4W DC - 350mA		Cct	Im S - D	Optic
Steel/Alu	80455	M 2700	490 - 360	20 Spot (20°)
Brass/Alu	82533	W 3000	490 - 360	30 Flood (30°)
		N 4000	529 - 389	60 W.Flood (60°)

Electronics

89421	99183	83100
ON/OFF 1 art. p 65 x l 74 x h 27	ON/OFF 2 - 3 art. p 80 x l 100 x h 31	DALI 1 - 4 art. p 54 x l 121 x h 26


C.V. 5W DC - 24 V DC		Cct	Im S - D	Optic
Steel/Alu	80456	M 2700	490 - 360	20 Spot (20°)
Brass/Alu	82534	W 3000	490 - 360	30 Flood (30°)
		N 4000	529 - 389	60 W.Flood (60°)

Electronics

89488	89179	89359	99332	99722
ON/OFF 1 - 2 art. p 80 x l 100 x h 31	ON/OFF 1 - 4 art. p 92 x l 117 x h 38	ON/OFF 1 - 9 art. p 115 x l 140 x h 50	0/1-10V 1 - 29 art. p 150 x l 60 x h 35	DALI 1 - 23 art. p 191 x l 63 x h 38

Recessed casing Pag. 27



Suelo_RJ | Up-Light | 198-264 V AC | powerLED 4 W DC - 5 W AC

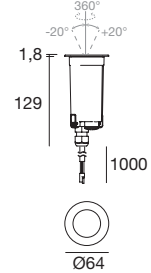

		Cct	Im S - D	Optic
Steel/Alu	80457	M 2700	490 - 360	20 Spot (20°)
		W 3000	490 - 360	30 Flood (30°)
		N 4000	529 - 389	60 W.Flood (60°)

Recessed casing Pag. 27

Suelo_R | Up-Light | powerLED

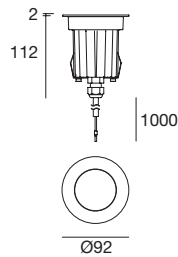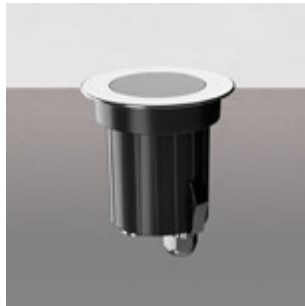

C.C. 8W DC - 630mA	Cct	lm S - D	Optic
Steel/Alu 80546	M 2700	877 - 568	06 N.Spot (9°)
	W 3000	945 - 568	15 Spot (17°)
	N 4000	1013 - 613	30 Flood (26°)
			60 W.Flood (51°)
			88 Elliptic -
			12 E.W.Flood(104°)
			00 General -
			07 Asymm. -

C.C. 8W DC - 630mA	Cct	lm S - D	Optic
Steel/Alu 80547	M 2700	877 - 453	06 N.Spot (9°)
	W 3000	945 - 453	15 Spot (14°)
	N 4000	1013 - 489	30 Spot (24°)
			60 Flood (42°)

Electronics

99179	99186	83102
ON/OFF 1 art. p 80 x l 100 x h 31	ON/OFF 2 - 3 art. p 92 x l 117 x h 38	DALI 1 - 3 art. p 53 x l 121 x h 26

C.V. 9W DC - 24 V DC	Cct	lm S - D	Optic
Steel/Alu 80550	M 2700	877 - 568	06 N.Spot (9°)
	W 3000	945 - 568	15 Spot (17°)
	N 4000	1013 - 613	30 Flood (26°)
			60 W.Flood (51°)
			88 Elliptic -
			12 E.W.Flood(104°)
			00 General -
			07 Asymm. -

C.V. 9W DC - 24 V DC	Cct	lm S - D	Optic
Steel/Alu 80551	M 2700	877 - 453	06 N.Spot (9°)
	W 3000	945 - 453	15 Spot (14°)
	N 4000	1013 - 489	30 Spot (24°)
			60 Flood (42°)

Electronics

89179	89359	99331	99332	99722
ON/OFF 1 - 2 art. p 92 x l 117 x h 38	ON/OFF 1 - 5 art. p 115 x l 140 x h 50	ON/OFF 1 - 15 art. p 150 x l 160 x h 35	0/1-10V 1 - 15 art. p 150 x l 160 x h 35	DALI 1 - 12 art. p 191 x l 63 x h 38



RGBW - 8W DC - 630 mA	Cct	Optic
Steel/Alu 81717	Q RGBW natural white	06 N.Spot
	V RGBW warm white	15 Spot
		45 Flood

Electronics

99743+99702	99333	DMX	Driver	Switching
Dimmer RF 1 - 12 art.	Dimmer DMX 2 - 12 art.	DMX Controllers CV 24V/48V Pag. 952 - 953	Driver CV 48V Pag. 941	Switching CV 48V Pag. 932

Recessed casing Pag. 27

Suelo_R | Up-Light | 198-264 V AC | powerLED 8 W DC - 9 W AC

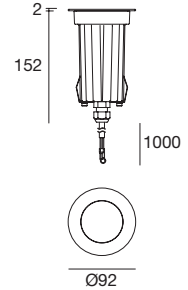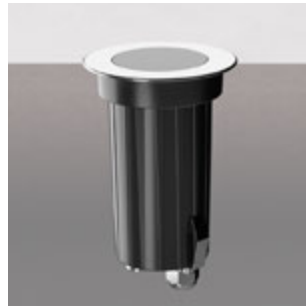



Cct	lm S - D	Optic
Steel/Alu 80554	M 2700	877 - 568
	W 3000	945 - 568
	N 4000	1013 - 613
		06 N.Spot (9°)
		15 Spot (17°)
		30 Flood (26°)
		60 W.Flood (51°)
		88 Elliptic -
		12 E.W.Flood(104°)
		00 General -
		07 Asymm. -

Cct	lm S - D	Optic
Steel/Alu 80555	M 2700	877 - 453
	W 3000	945 - 453
	N 4000	1013 - 489
		06 N.Spot (9°)
		15 Spot (14°)
		30 Spot (24°)
		60 Flood (42°)

Recessed casing Pag. 27



Suelo_R Pro | Up-Light | powerLED

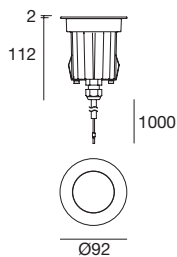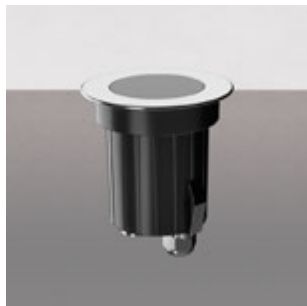

C.C. 8W DC - 630mA	Cct	Im S - D	Optic
Steel/Alu 80558	M 2700	877 - 510	06 N.Spot (6°)
C.C. 8W DC - 630mA HC	W 3000	945 - 510	15 Spot (15°)
Steel/Alu 80559	N 4000	1013 - 547	30 Flood (25°)
C.C. 8W DC - 630mA DL			60 W.Flood (57°)
Steel/Alu 80560			

Electronics

99179	99186	83102
ON/OFF 1 art. p 80 x l 100 x h 31	ON/OFF 2 - 3 art. p 92 x l 117 x h 38	DALI 1 - 3 art. p 53 x l 121 x h 26


C.V. 9W DC - 24 V DC	Cct	Im S - D	Optic
Steel/Alu 80564	M 2700	877 - 510	06 N.Spot (6°)
C.V. 9W DC - 24 V DC HC	W 3000	945 - 510	15 Spot (15°)
Steel/Alu 80565	N 4000	1013 - 547	30 Flood (25°)
C.V. 9W DC - 24 V DC DL			60 W.Flood (57°)
Steel/Alu 80566			

Electronics

89179	89359	99331	99332	99722
ON/OFF 1 - 2 art. p 92 x l 117 x h 38	ON/OFF 1 - 5 art. p 115 x l 140 x h 50	ON/OFF 1 - 15 art. p 150 x l 60 x h 35	0/1-10V 1 - 15 art. p 150 x l 60 x h 35	DALI 1 - 12 art. p 191 x l 63 x h 38

Recessed casing Pag. 27

Suelo_R Pro | Up-Light | 198-264 V AC | powerLED 8 W DC - 9 W AC

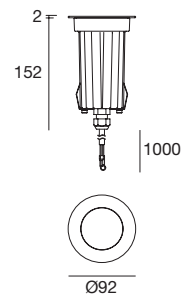

	Cct	Im S - D	Optic
Steel/Alu 80570	M 2700	877 - 510	06 N.Spot (6°)
Brass/Alu 82535	W 3000	945 - 510	15 Spot (15°)
	N 4000	1013 - 547	30 Flood (25°)
			60 W.Flood (57°)
Steel/Alu 80571			
Brass/Alu 82536			
Steel/Alu 80572			
Brass/Alu 82537			




Recessed casing Pag. 27



Suelo_R Pro Brass

Suelo_R Pro Steel

Suelo_RJ Pro | Up-Light | powerLED

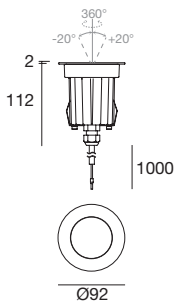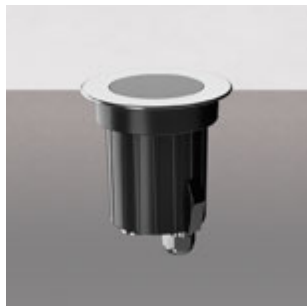

C.C. 8W DC - 630mA		Cct	lm S - D	Optic
Steel Alu	80576	M 2700	760 - 558	20 Spot (20°)
		W 3000	760 - 558	30 Flood (30°)
		N 4000	821 - 603	60 W.Flood (60°)

Electronics

99179	99186	83102
ON/OFF	ON/OFF	DALI
1 art.	2 - 3 art.	1 - 3 art.
p 80 x l 100 x h 31	p 92 x l 117 x h 38	p 53 x l 121 x h 26


C.V. 9W DC - 24 V DC		Cct	lm S - D	Optic
Steel Alu	80578	M 2700	760 - 558	20 Spot (20°)
		W 3000	760 - 558	30 Flood (30°)
		N 4000	821 - 603	60 W.Flood (60°)

Electronics

89179	89359	99331	99332	99722
ON/OFF	ON/OFF	ON/OFF	0/1-10V	DALI
1 - 2 art.	1 - 5 art.	1 - 15 art.	1 - 15 art.	1 - 12 art.
p 92 x l 117 x h 38	p 115 x l 140 x h 50	p 150 x l 160 x h 35	p 150 x l 160 x h 35	p 191 x l 163 x h 38

Recessed casing Pag. 27



Suelo_RJ Pro | Up-Light | 198-264 V AC | powerLED 8 W DC - 9 W AC

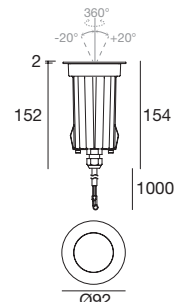

		Cct	lm S - D	Optic
Steel Alu	80580	M 2700	760 - 558	20 Spot (20°)
		W 3000	760 - 558	30 Flood (30°)
		N 4000	821 - 603	60 W.Flood (60°)

Recessed casing Pag. 27

Suelo_RX Pro | Up-Light | powerLED



C.C. 2W DC - 630mA	Cct	lm S - D	Optic
Steel/Alu 80435	M 2700	219 - 120	15 Spot (22°)
Brass/Alu 82538	W 3000	233 - 137	30 Flood (28°)
	N 4000	249 - 147	60 W.Flood (54°)
			00 General -

C.C. 2W DC - 630mA ^{HC}	Cct	lm S - D	Optic
Steel/Alu 80436	M 2700	219 - 76	15 Spot (19°)
Brass/Alu 82539	W 3000	233 - 85	30 Flood (25°)
	N 4000	249 - 91	60 Flood (44°)

Electronics

89420	99179	99186	83102
ON/OFF 1 - 2 art. p 65 x l 174 x h 27	ON/OFF 3 - 6 art. p 80 x l 100 x h 31	ON/OFF 6 - 12 art. p 92 x l 117 x h 38	DALI 1 - 14 art. p 54 x l 121 x h 26

C.V. 2,5W DC - 24 V DC	Cct	lm S - D	Optic
Steel/Alu 80437	M 2700	219 - 120	15 Spot (22°)
Brass/Alu 82540	W 3000	233 - 137	30 Flood (28°)
	N 4000	249 - 147	60 W.Flood (54°)
			00 General -



C.V. 2,5W DC - 24 V DC ^{HC}	Cct	lm S - D	Optic
Steel/Alu 80438	M 2700	219 - 76	15 Spot (19°)
Brass/Alu 82541	W 3000	233 - 85	30 Flood (25°)
	N 4000	249 - 91	60 Flood (44°)

Electronics

89488	89179	89359	99332	99722
ON/OFF 1 - 7 art. p 80 x l 100 x h 31	ON/OFF 1 - 12 art. p 92 x l 117 x h 38	ON/OFF 1 - 24 art. p 115 x l 140 x h 50	0/1-10V 1 - 75 art. p 150 x l 160 x h 35	DALI 1 - 60 art. p 191 x l 63 x h 38

Recessed casing Pag. 27

Suelo_RX | Up-Light | powerLED



C.C. - 8W DC - 630 mA	Cct	lm S - D	Optic
Steel/Alu 80548	M 2700	877 - 568	06 N.Spot (9°)
	W 3000	945 - 568	15 Spot (17°)
	N 4000	1013 - 613	30 Flood (26°)
			60 W.Flood (51°)
			88 Elliptic -
			12 E.W.Flood(104°)
			00 General -
			07 Asymm. -

C.C. - 8W DC - 630 mA ^{HC}	Cct	lm S - D	Optic
Steel/Alu 80549	M 2700	877 - 453	06 N.Spot (9°)
	W 3000	945 - 453	15 Spot (14°)
	N 4000	1013 - 489	30 Flood (24°)
			60 Flood (42°)

Electronics

99179	99186	83102
ON/OFF 1 art. p 80 x l 100 x h 31	ON/OFF 2 - 3 art. p 92 x l 117 x h 38	DALI 1 - 3 art. p 53 x l 121 x h 26

C.V. - 9W DC - 24 V DC	Cct	lm S - D	Optic
Steel/Alu 80552	M 2700	877 - 568	06 N.Spot (9°)
	W 3000	945 - 568	15 Spot (17°)
	N 4000	1013 - 613	30 Flood (26°)
			60 W.Flood (51°)
			88 Elliptic -
			12 E.W.Flood(104°)
			00 General -
			07 Asymm. -

C.V. - 9W DC - 24 V DC ^{HC}	Cct	lm S - D	Optic
Steel/Alu 80553	M 2700	877 - 453	06 N.Spot (9°)
	W 3000	945 - 453	15 Spot (14°)
	N 4000	1013 - 489	30 Flood (24°)
			60 Flood (42°)

Electronics

89179	89359	99331	99332	99722
ON/OFF 1 - 2 art. p 92 x l 117 x h 38	ON/OFF 1 - 5 art. p 115 x l 140 x h 50	ON/OFF 1 - 15 art. p 150 x l 160 x h 35	0/1-10V 1 - 15 art. p 150 x l 60 x h 35	DALI 1 - 12 art. p 191 x l 63 x h 38


RGBW - 8W - 630mA	Cct	Optic
Steel/Alu 81718	Q RGBW natural white	06 N.Spot
	V RGBW warm white	15 Spot
		45 Flood

Electronics

99743+99702	99333	DMX	Driver	Switching
Dimmer RF 1 - 12 art.	Dimmer DMX 2 - 12 art.	DMX Controllers CV 24V/48V Pag. 952 - 953	Driver CV 48V Pag. 941	Switching CV 48V Pag. 932

Recessed casing Pag. 27




Suelo_RX Pro | Up-Light | 198-264 V AC | powerLED 8 W DC - 9 W AC

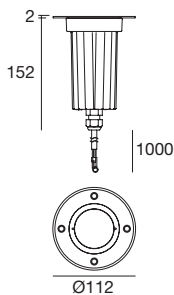

	Cct	lm S - D	Optic
Steel/Alu 80573	M 2700	877 - 510	06 N.Spot (6°)
Brass/Alu 82542	W 3000	945 - 510	15 Spot (15°)
	N 4000	1013 - 547	30 Flood (25°)
			60 W.Flood (57°)
			HC
Steel/Alu 80574			
Brass/Alu 82543			
			DL
Steel/Alu 80575			
Brass/Alu 82544			

Recessed casing Pag. 27

Suelo_RXJ | Up-Light | powerLED

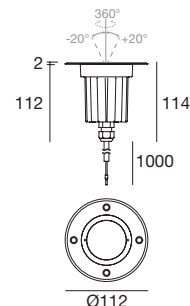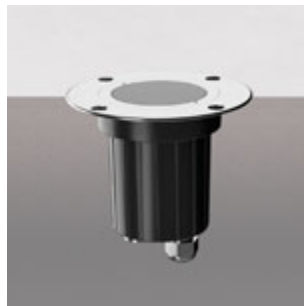

C.C. - 8W DC - 630 mA	Cct	lm S - D	Optic
Steel/Alu 80577	M 2700	760 - 558	20 Spot (20°)
	W 3000	760 - 558	30 Flood (30°)
	N 4000	821 - 603	60 W.Flood (60°)

Electronics

99179	99186	83102
ON/OFF	ON/OFF	DALI
1 art.	2 - 3 art.	1 - 3 art.
p 80 x l 100 x h 31	p 92 x l 117 x h 38	p 53 x l 121 x h 26


C.V. 9W DC - 24 V DC	Cct	lm S - D	Optic
Steel/Alu 80579	M 2700	760 - 558	20 Spot (20°)
	W 3000	760 - 558	30 Flood (30°)
	N 4000	821 - 603	60 W.Flood (60°)

Electronics

89179	89359	99331	99332	99722
ON/OFF	ON/OFF	ON/OFF	0/1-10V	DALI
1 - 2 art.	1 - 5 art.	1 - 15 art.	1 - 15 art.	1 - 12 art.
p 92 x l 117 x h 38	p 115 x l 140 x h 50	p 150 x l 60 x h 35	p 150 x l 60 x h 35	p 191 x l 63 x h 38

Recessed casing Pag. 27

Suelo_RXJ | Up-Light | 198-264 V AC | powerLED 8 W DC - 9 W AC


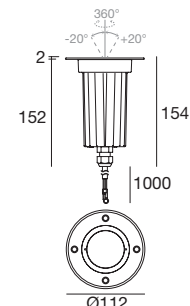


	Cct	lm S - D	Optic
Steel/Alu 80581	M 2700	760 - 558	20 Spot (20°)
Brass/Alu 82545	W 3000	760 - 558	30 Flood (30°)
	N 4000	821 - 603	60 W.Flood (60°)

Recessed casing Pag. 27



Suelo_RX | Up-Light | 198-264 V AC | arrayLED 13W DC - 15W AC

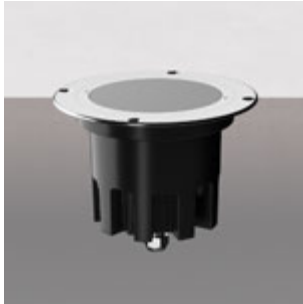

	Cct	Im S - D	Optic
Steel/Alu 80607	M 2700	1843 - 1098	15 Spot (14°)
	W 3000	1921 - 1144	35 Flood (33°)
	N 4000	2028 - 1208	60 W.Flood (64°)

	Cct	Im S - D	Optic
Steel/Alu 81109	M 2700	1683 - 769	07 Asymm. -
	W 3000	1808 - 800	
	N 4000	1949 - 864	

	Cct	Im S - D	Optic
Steel/Alu 80608	M 2700	1470 - 1050	06 N.Spot (7°)
	W 3000	1470 - 1050	
	N 4000	1587 - 1109	

	Cct	Im S - D	Optic
Steel/Alu 81740 HC	M 2700	1843 - 668	15 Spot (14°)
	W 3000	1921 - 696	35 Flood (29°)
	N 4000	2028 - 735	60 W.Flood (49°)


Steel/Alu 81741 DL

	Cct	Optic
RGBW - 13 WDC - 350 mA		
Steel/Alu 81719	V RGBW warm white	15 Spot -
		30 Flood -
		60 W.Flood -

Dimmer	DMX	Driver	Switching
99302 Dimmer RF 1 - 3 art.	99333 Dimmer DMX 2 - 3 art.	DMX DMX Controllers Pag. 952 - 953	Driver CV 48V Pag. 941
			Switching CV 48V Pag. 932

Recessed casing Pag. 27

Suelo_RX Pro | Up-Light | 198-264 V AC | arrayLED 13 W DC - 15 W AC

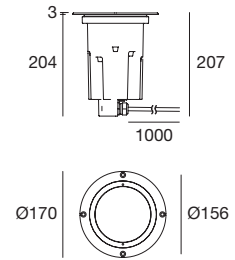

	Cct	Im S - D	Optic
Steel/Alu 80611	M 2700	1724 - 1098	15 Spot (14°)
Brass/Alu 82546	W 3000	1724 - 1144	35 Flood (33°)
	N 4000	1854 - 1208	60 W.Flood (64°)



	Cct	Im S - D	Optic
Steel/Alu 80612	M 2700	1743 - 1184	07 Asymm. -
Brass/Alu 82547	W 3000	1863 - 1265	
	N 4000	1863 - 1265	

	Cct	Im S - D	Optic
Steel/Alu 81744 HC	M 2700	1724 - 668	15 Spot (14°)
Brass/Alu 82548	W 3000	1724 - 696	35 Flood (29°)
	N 4000	1854 - 735	60 W.Flood (50°)

	Cct	Im S - D	Optic
Steel/Alu 81745 DL			
Brass/Alu 82549			

Recessed casing Pag. 27

Suelo_RX | Up-Light | 198-264 V AC | arrayLED 13 W DC - 15 W AC

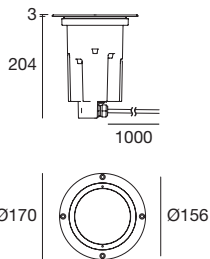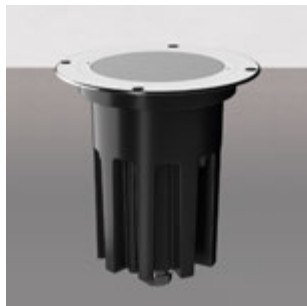

DALI	Cct	Im S - D	Optic
Steel/Alu 80609	M 2700	1470 - 1007	06 N.Spot (7°)
	W 3000	1470 - 1050	
	N 4000	1587 - 1109	



DALI	Cct	Im S - D	Optic
Steel/Alu 80610	M 2700	1843 - 1098	15 Spot (14°)
	W 3000	1921 - 1144	35 Flood (33°)
	N 4000	2028 - 1208	60 W.Flood (64°)

DALI	Cct	Im S - D	Optic
Steel/Alu 81110	M 2700	1683 - 769	07 Asymm. -
	W 3000	1808 - 800	
	N 4000	1949 - 846	

DALI	HC	Cct	Im S - D	Optic
Steel/Alu 81742		M 2700	1843 - 668	15 Spot (14°)
		W 3000	1921 - 701	35 Flood (29°)
	DL	N 4000	2028 - 735	60 W.Flood (50°)
Steel/Alu 81743				

Recessed casing Pag. 27



Suelo_RXJ | Up-Light | 198-264 V AC | arrayLED 13 W DC - 15 W AC

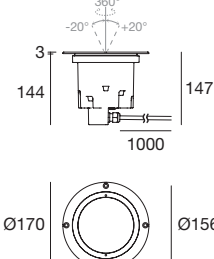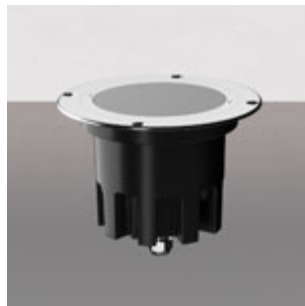

	Cct	Im S - D	Optic
Steel/Alu 80613	M 2700	1724 - 978	15 Spot (16°)
Brass/Alu 82550	W 3000	1724 - 1020	35 Flood (30°)
	N 4000	1854 - 1077	45 W.Flood (46°)

Recessed casing Pag. 27




Suelo_RXJ | Up-Light | 198-264 V AC | arrayLED 13 W DC - 15 W AC

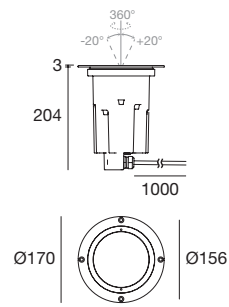

DALI	Cct	Im S - D	Optic
Steel/Alu 81111	M 2700	1843 - 978	15 Spot (16°)
	W 3000	1921 - 1020	35 Flood (30°)
	N 4000	2028 - 1077	45 W.Flood (46°)

Recessed casing Pag. 27

Suelo_RX | Up-Light | 198-264 V AC | arrayLED

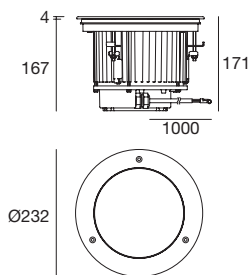

30 W DC - 33,6 W AC	Cct	lm S - D	Optic
Steel/Alu 80614	M 2700	4088 - 3159	15 Spot (18°)
	W 3000	4372 - 3293	35 Flood (32°)
	N 4000	4702 - 3475	60 W.Flood (57°)

30 W DC - 33,6 W AC	Cct	lm S - D	Optic
Steel/Alu 80615	M 2700	3428 - 2117	06 N.Spot (7°)
	W 3000	3428 - 2117	
	N 4000	3700 - 2234	

25 W DC - 27 W AC	Cct	lm S - D	Optic
Steel/Alu 80616	M 2700	3167 - 1408	07 Asymm. -
	W 3000	3401 - 1467	
	N 4000	3667 - 1548	

25 W DC - 27 W AC	HC	Cct	lm S - D	Optic
Steel/Alu 81746		M 2700	4088 - 1743	15 Spot (18°)
25 W DC - 27 W AC	DL	W 3000	4372 - 1816	35 Flood (28°)
Steel/Alu 81747		N 4000	4702 - 1918	60 Flood (42°)

30 W DC - 33,6 W AC	DALI	Cct	lm S - D	Optic
Steel/Alu 81732		M 2700	4088 - 3159	15 Spot (18°)
		W 3000	4372 - 3293	30 Flood (32°)
		N 4000	4702 - 3475	60 W.Flood (57°)

30 W DC - 33,6 W AC	DALI	Cct	lm S - D	Optic
Steel/Alu 81733		M 2700	4088 - 2032	06 N.Spot (7°)
		W 3000	4372 - 2117	
		N 4000	4702 - 2234	

25 W DC - 27 W AC	DALI	Cct	lm S - D	Optic
Steel/Alu 81734		M 2700	3167 - 1408	07 Asymm. -
		W 3000	3401 - 1467	
		N 4000	3667 - 1548	

25 W DC - 27 W AC	HC	Cct	lm S - D	Optic
Steel/Alu 81748		M 2700	4088 - 1743	15 Spot (18°)
25 W DC - 27 W AC	DL	W 3000	4372 - 1816	35 Flood (28°)
Steel/Alu 81749		N 4000	4702 - 1918	60 Flood (42°)



RGBW - 23 WDC - 220 mA	Cct	Optic
Steel/Alu 81737	V RGBW warm white	15 Spot -
		30 Flood -
		60 W.Flood -

Electronics

99703+99702	99333	DMX	Driver	Switching
Dimmer RF 1 art.	Dimmer DMX 1 art.	DMX Controllers Pag. 952 - 953	Driver CV 48V Pag. 941	Switching CV 48V Pag. 932

Recessed casing Pag. 27

Suelo_RXJ | Up-Light | 198-264 V AC | arrayLED 30 W DC - 33,6 W AC

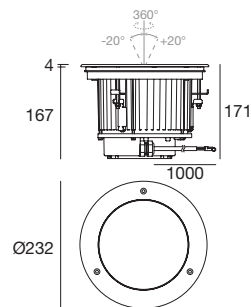



	Cct	lm S - D	Optic
Steel/Alu 80617	M 2700	4088 - 2945	15 Spot (18°)
	W 3000	4372 - 3068	30 Flood (34°)
	N 4000	4702 - 3240	60 W.Flood (59°)

DALI	Cct	lm S - D	Optic
Steel/Alu 81735	M 2700	4088 - 2945	15 Spot (18°)
	W 3000	4372 - 3068	30 Flood (34°)
	N 4000	4702 - 3240	60 W.Flood (59°)

Recessed casing Pag. 27



Suelo_RDX | Up-Light | 198-264 V AC | powerLED 12 W DC - 13,5 W AC

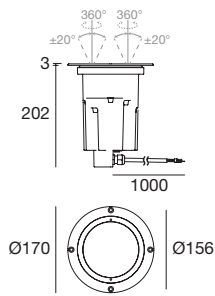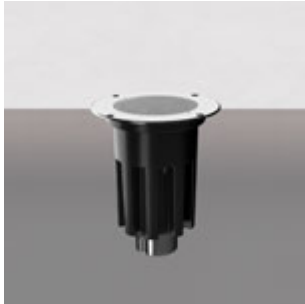

	Cct	lm S - D	Optic
Steel/Alu 81619	M 2700	1114 - 435	15 Spot (19°)
	W 3000	1176 - 457	30 Flood (26°)
	N 4000	1300 - 505	60 W.Flood (65°)


Recessed casing Pag. 27

Suelo_RDX | Up-Light | 198-264 V AC | powerLED 24 W DC - 26 W AC

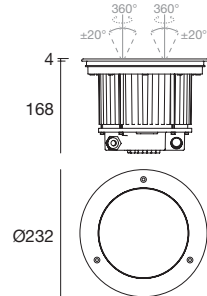

	Cct	lm S - D	Optic
Steel/Alu 81620	M 2700	3122 - 2090	15 Spot -
	W 3000	3254 - 2251	30 Flood -
	N 4000	3463 - 2411	60 Flood -

Recessed casing Pag. 27


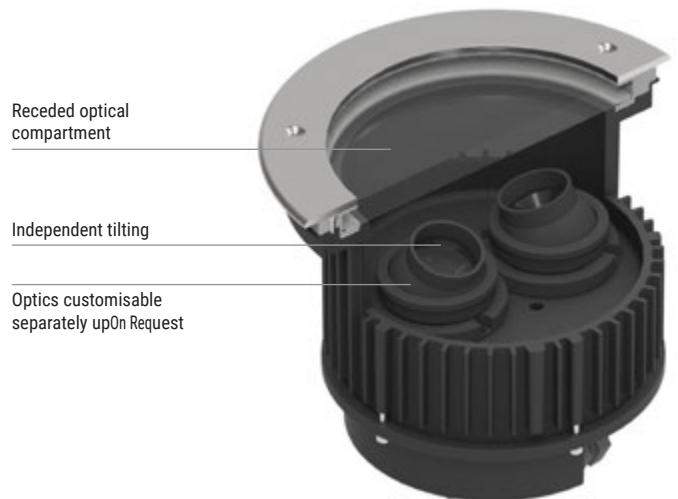


Receded optical compartment

Independent tilting

Optics customisable separately upOn Request

Suelo_RX | Up-Light | 198-264 V AC | arrayLED

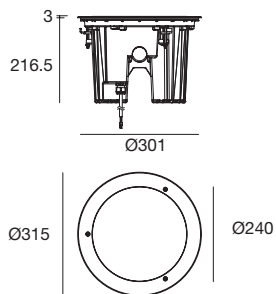

44,2 W DC - 48,2 W AC	Cct	Im S - D	Optic
Steel/Alu 83925	M 2700	6489 - On req	15 Spot -
DALI 44,2 W DC - 48,2 W AC	W 3000	6762 - On req	30 Flood -
Steel/Alu 83928	N 4000	7139 - On req	50 W.Flood -

44,2 W DC - 48,2 W AC ^{HC}	Cct	Im S - D	Optic
Steel/Alu 83926	M 2700	6489 - On req	15 Spot -
DALI 44,2 W DC - 48,2 W AC	W 3000	6762 - On req	30 Flood -
Steel/Alu 83929	N 4000	7139 - On req	50 W.Flood -

44,2 W DC - 48,2 W AC	Cct	Im S - D	Optic
Steel/Alu 83937	M 2700	4849 - On req	06 Spot -
DALI 44,2 W DC - 48,2 W AC	W 3000	4849 - On req	06 Spot -
Steel/Alu 83938	N 4000	5235 - On req	06 Spot -


RGBW 37W DC - 41W AC	Cct	Optic
Steel/Alu 83941	V RGBW warm white	15 Spot - 30 Flood - 50 W.Flood -

Electronics

99741+99702	99333	DMX	Driver	Switching
Dimmer RF 1 art.	Dimmer DMX 2 - 3 art.	DMX Controllers Pag. 952 - 953	Driver CV 48V Pag. 941	Switching CV 48V Pag. 932

Recessed casing Pag. 27

Suelo_RXJ | Up-Light | 198-264 V AC | arrayLED

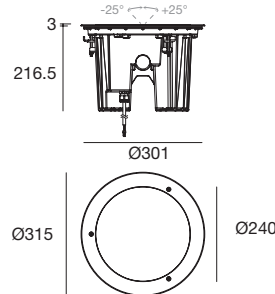

44,2 W DC - 48,2 W AC	Cct	Im S - D	Optic
Steel/Alu 82713	M 2700	6489 - On req	15 Spot -
DALI 44,2 W DC - 48,2 W AC	W 3000	6762 - On req	30 Flood -
Steel/Alu 82716	N 4000	7139 - On req	50 W.Flood -

44,2 W DC - 48,2 W AC ^{HC}	Cct	Im S - D	Optic
Steel/Alu 82714	M 2700	6489 - On req	15 Spot -
DALI 44,2 W DC - 48,2 W AC	W 3000	6762 - On req	30 Flood -
Steel/Alu 82717	N 4000	7139 - On req	50 W.Flood -



44,2 W DC - 48,2 W AC	Cct	Im S - D	Optic
Steel/Alu 82719	M 2700	4849 - On req	06 Spot -
DALI 44,2 W DC - 48,2 W AC	W 3000	4849 - On req	06 Spot -
Steel/Alu 82720	N 4000	5235 - On req	06 Spot -

RGBW 37W DC - 41W AC	Cct	Optic
Steel/Alu 82723	V RGBW warm white	15 Spot - 30 Flood - 50 W.Flood -


Electronics

99741+99702	99333	DMX	Driver	Switching
Dimmer RF 1 art.	Dimmer DMX 2 - 3 art.	DMX Controllers Pag. 952 - 953	Driver CV 48V Pag. 941	Switching CV 48V Pag. 932

Recessed casing Pag. 27

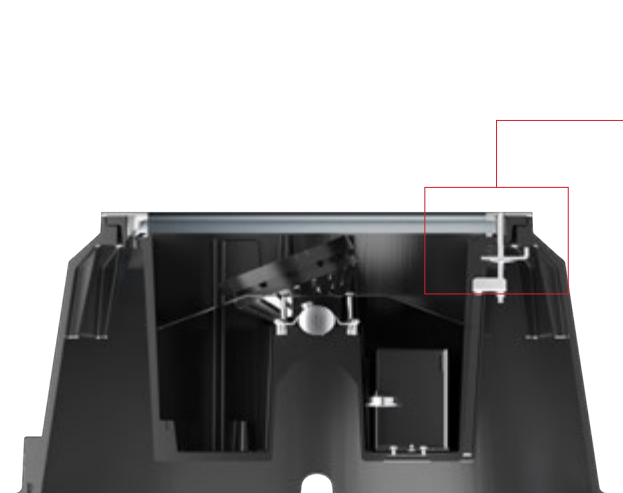


Suitable for RX / RXJ Ø 315



Suitable for RF / RFJ Ø 308

Suelo_RF | Up-Light | 198-264 V AC | arrayLED

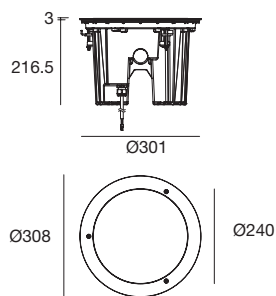

44,2 W DC - 48,2 W AC	Cct	Im S - D	Optic
Steel/Alu 83931	M 2700	6489 - On req	15 Spot -
DALI 44,2 W DC - 48,2 W AC	W 3000	6762 - On req	30 Flood -
Steel/Alu 83934	N 4000	7139 - On req	50 W.Flood -

44,2 W DC - 48,2 W AC ^{HC}	Cct	Im S - D	Optic
Steel/Alu 83932	M 2700	6489 - On req	15 Spot -
DALI 44,2 W DC - 48,2 W AC	W 3000	6762 - On req	30 Flood -
Steel/Alu 83935	N 4000	7139 - On req	50 W.Flood -

44,2 W DC - 48,2 W AC	Cct	Im S - D	Optic
Steel/Alu 83939	M 2700	4849 - On req	06 Spot -
DALI 44,2 W DC - 48,2 W AC	W 3000	4849 - On req	
Steel/Alu 83940	N 4000	5235 - On req	


RGBW 37W DC - 41W AC	Cct	Optic
Steel/Alu 83942	V RGBW warm white	15 Spot -
		30 Flood -
		50 W.Flood -

Electronics

99741+99702	99333	DMX	Driver	Switching
Dimmer RF 1 art.	Dimmer DMX 2 - 3 art.	DMX Controllers Pag. 952 - 953	Driver CV 48V Pag. 941	Switching CV 48V Pag. 932

Recessed casing Pag. 27

Suelo_RFJ | Up-Light | 198-264 V AC | arrayLED

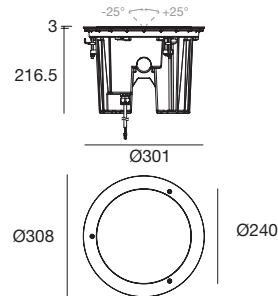

44,2 W DC - 48,2 W AC	Cct	Im S - D	Optic
Steel/Alu 83776	M 2700	6489 - On req	15 Spot -
DALI 44,2 W DC - 48,2 W AC	W 3000	6762 - On req	30 Flood -
Steel/Alu 83779	N 4000	7139 - On req	50 W.Flood -

44,2 W DC - 48,2 W AC ^{HC}	Cct	Im S - D	Optic
Steel/Alu 83777	M 2700	6489 - On req	15 Spot -
DALI 44,2 W DC - 48,2 W AC	W 3000	6762 - On req	30 Flood -
Steel/Alu 83780	N 4000	7139 - On req	50 W.Flood -

44,2 W DC - 48,2 W AC	Cct	Im S - D	Optic
Steel/Alu 82721	M 2700	4849 - On req	06 Spot -
DALI 44,2 W DC - 48,2 W AC	W 3000	4849 - On req	
Steel/Alu 82722	N 4000	5235 - On req	

RGBW 37W DC - 41W AC	Cct	Optic
Steel/Alu 82724	V RGBW warm white	15 Spot -
		30 Flood -
		50 W.Flood -

Electronics

99741+99702	99333	DMX	Driver	Switching
Dimmer RF 1 art.	Dimmer DMX 2 - 3 art.	DMX Controllers Pag. 952 - 953	Driver CV 48V Pag. 941	Switching CV 48V Pag. 932


Recessed casing Pag. 27

Easy Adjust. System


Thanks to the system realized by the i-Led technical offices, the new Suelo recessed casing allows the light to be flush-mounted without having to open its body, using a tension-rod system that locks rotation of the product. This makes installation of the recessed casing easy and secure.

PATENT PENDING

EAS

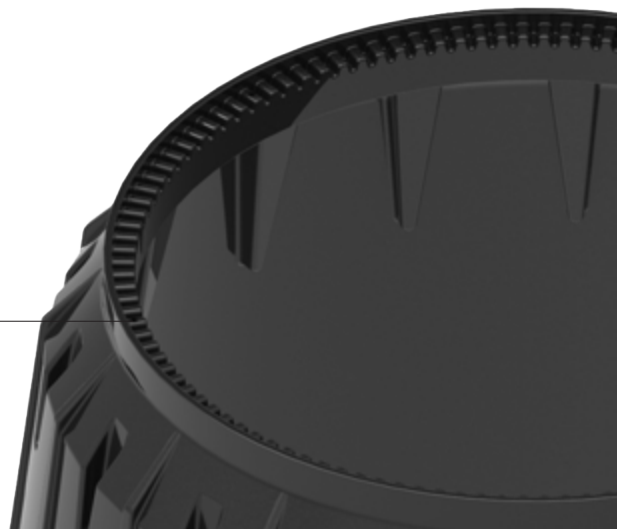



Suelo Telescopic | Up-Light | 198-264 V AC | arrayLED 12 W DC - 13,5 W AC



	Cct	lm S - D	Optic
DarkBrown 81475	M 2700	1743 - 900	15 Spot (20°)
	W 3000	1863 - 962	30 Flood (40°)
	N 4000	1863 - 962	60 W.Flood (52°)

Recessed casing Pag. 27

Suelo Telescopic | Up-Light | 198-250 V | arrayLED 26 W DC - 29 W AC




	Cct	lm S - D	Optic
DarkBrown 81476	M 2700	3400 - 1720	15 Spot (27°)
	W 3000	3673 - 1847	30 Flood (39°)
	N 4000	3909 - 1847	60 W.Flood (51°)

Recessed casing Pag. 27




Suelo_I Focus | Up-Light | 198-264 V AC | arrayLED 8 W DC - 9,5 W AC

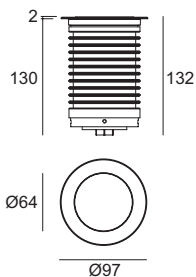

	Cct	lm S - D	Optic
Steel/Alu 81692	M 2700	770 - On req	85 Adj. (10°-65°)
	W 3000	770 - On req	
	N 4000	831 - On req	

Recessed casing Pag. 27

Suelo Focus | Up-Light | 198-264 V AC | arrayLED 8 W DC - 9,5 W AC

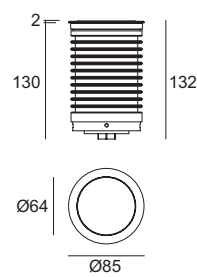

	Cct	lm S - D	Optic
Steel/Alu 81693	M 2700	770 - On req	85 Adj. (10°-65°)
	W 3000	770 - On req	
	N 4000	831 - On req	

Recessed casing Pag. 27




Narrow Spot



Spot



Spot

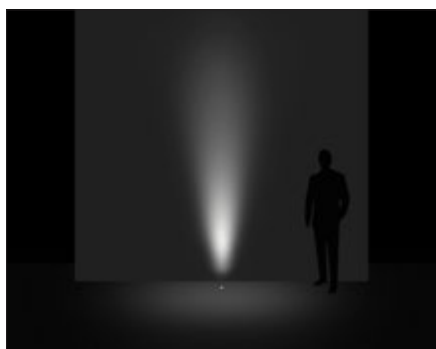

Flood






Medium Flood



Medium Flood



Suelo_Brass | Up-Light | 190-250 V | powerLED 8 W DC - 9 W AC

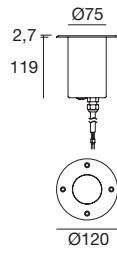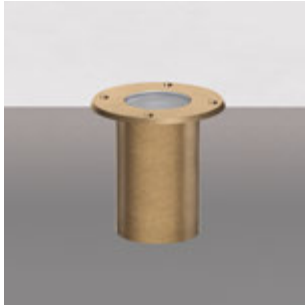


	Cct	Im S - D	Optic
Brass 82266	M 2700	902 - On Req	06 N.Spot -
	W 3000	945 - On Req	-
	N 4000	1016 - On Req	-

	Cct	Im S - D	Optic
Brass 82267	M 2700	902 - On Req	15 Spot -
	W 3000	945 - On Req	35 Flood -
	N 4000	1016 - On Req	60 W.Flood -

	Cct	Im S - D	Optic
Brass 82268 HC	M 2700	902 - On Req	06 N.Spot -
	W 3000	945 - On Req	-
	N 4000	1016 - On Req	-

	Cct	Im S - D	Optic
Brass 82269 HC	M 2700	902 - On Req	15 Spot -
	W 3000	945 - On Req	35 Flood -
	N 4000	1016 - On Req	60 W.Flood -

Recessed casing Pag. 27

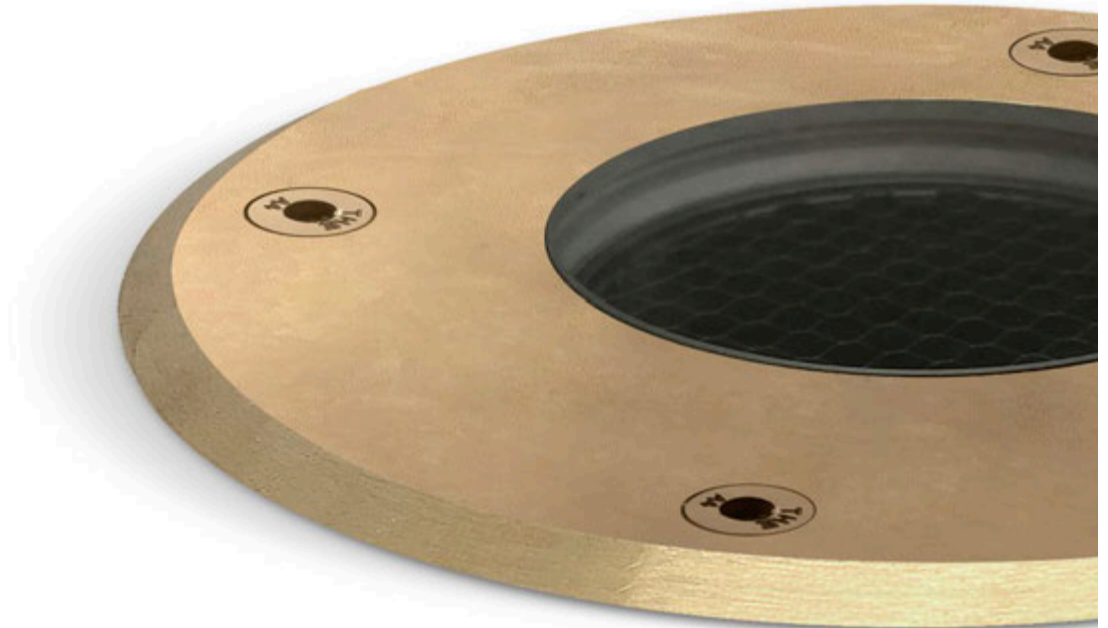

Recessed casing




description	type
99676 Recessed casings	PVC
suitable for: Suelo_R 1W	



description	type
84918 Recessed casings	PVC
suitable for: Suelo_R 2W	




description	type
84936 Recessed casings	PVC
suitable for: Suelo_R 4W - 5W (H64) Suelo_RJ 4W - 5W (H64)	



description	type
99680 Recessed casings	PVC
suitable for: Suelo_R 8W - 9W (H112) Suelo_R Pro 8W - 9W (H112) / Suelo_RJ Pro 8W - 9W (H112)	




description	type
99685 Recessed casings	PVC
suitable for: Suelo_RX Pro 2W - 2,5W	




description	type
98122 Recessed casings	PVC
suitable for: Suelo_RX 8W (H152) Suelo_RXJ 8W (H154) / Suelo_RX Pro 8W (H152)	




description	type
84932 Recessed casings	PVC
suitable for: Suelo_RX Pro 13W / Suelo_RX 13W (H204) Suelo_RXJ 13W (H204) / Suelo_RDX 12W	



description	type
99747 Recessed casings	PVC
suitable for: Suelo Telescopic 12W Suelo Telescopic 24W	




description	type
83097 Template	PVC
suitable for: 83096	




description	type
93099 Caseback	PVC
suitable for: 83096	



description	type
99804 Recessed casings	PVC
suitable for: Suelo Focus 8W	




description	type
99677 Recessed casings	PVC
suitable for: Suelo_R Pro 1W - 1,5W	




description	type
99684 Recessed casings	PVC
suitable for: Suelo_R Pro 2W - 2,5W	




description	type
84935 Recessed casings	PVC
suitable for: Suelo_R 4W (H129) / Suelo_R 5W (H129) Suelo_R Pro 4W - 5W / Suelo_RJ 4W (H129)	



description	type
99681 Recessed casings	PVC
suitable for: Suelo_R 8W (H152) / Suelo_R Pro 8W (H152) Suelo_RJ Pro 8W (H152)	



description	type
98121 Recessed casings	PVC
suitable for: Suelo_RX 8W - 9W (H112) Suelo_RX Pro 8W - 9W (H112) / Suelo_RXJ 8W - 9W (H112)	




description	type
84933 Recessed casings	PVC
suitable for: Suelo_RX 13W (H144) Suelo_RXJ 13W (H144)	



description	type
99794 Recessed casings	PVC
suitable for: Suelo_RX 23W - 25W - 30W Suelo_RXJ 30W / Suelo_RDX 24W	



description	type
83096 Recessed casings	PVC
suitable for: Suelo_RX 37W - 44,2W / Suelo_RXJ 37W - 44,2W / Suelo_RF 37W - 44,2W / Suelo_RFJ 37W - 44,2W	



description	type
83098 Template	PVC
suitable for: 83096	



description	type
84900 Recessed casings	PVC
suitable for: Suelo_Brass 8W	




description	type
99803 Recessed casings	PVC
suitable for: Suelo_I Focus 8W / Suelo Focus 8W	

suelo

Materials

AISI 316L stainless steel body

Suelo_R | Up-Light | 1 W powerLED 350mA




C.C.	Cct	lm S - D	Optic
Steel 80432	M 2700	136 - 104	20 Spot (26°)
	W 3000	145 - 111	35 Flood (36°)
	N 4000	155 - 119	

Electronics

89419	89421	99183	83100
ON/OFF 1 - 2 art. p 65 x l 74 x h 27	ON/OFF 3 - 6 art. p 65 x l 74 x h 27	ON/OFF 6 - 12 art. p 80 x l 100 x h 31	DALI 1 - 14 art. p 54 x l 121 x h 26

Recessed casing Pag. 29

Suelo_R Pro | Up-Light | powerLED



C.C. - 350 mA - 1W DC	Cct	lm S - D	Optic
Steel 80433	M 2700	136 - 96	20 Spot (23°)
	W 3000	145 - 102	35 Flood (34°)
	N 4000	155 - 110	

Electronics

89419	89421	99183	83100
ON/OFF 1 - 2 art. p 65 x l 74 x h 27	ON/OFF 3 - 6 art. p 65 x l 74 x h 27	ON/OFF 6 - 12 art. p 80 x l 100 x h 31	DALI 1 - 14 art. p 54 x l 121 x h 26

C.V. - 24V DC - 1,5W DC	Cct	lm S - D	Optic
Steel 80434	M 2700	136 - 96	20 Spot (23°)
	W 3000	145 - 102	35 Flood (34°)
	N 4000	155 - 110	

Electronics

89488	89179	89359	99332	99722
ON/OFF 1 - 9 art. p 80 x l 100 x h 31	ON/OFF 1 - 15 art. p 92 x l 117 x h 38	ON/OFF 1 - 30 art. p 115 x l 140 x h 50	0/1-10V 1 - 98 art. p 150 x l 160 x h 35	DALI 1 - 78 art. p 191 x l 163 x h 38

Recessed casing Pag. 29

Recessed casing



description	PVC
99678 Recessed casing IP68	IP68
suitable for: Suelo_R	



description	PVC
99679 Recessed casing IP68	IP68
suitable for: Suelo_R Pro	

Addresses

Linea Light HQ Italy

via della Fornace, 59 z.i.
31023 Castelmolinio di Resana (TV) - Italy
Phone: +39 0423 7868
Fax: +39 0423 786900
info@linealight.com

Linea Light Milano

via Morimondo, 26 int. 17G
20143 Milano - Italy
Phone: +39 02 36750915
Fax: +39 02 36750915
milano@linealight.com

Linea Light Roma

Via La Spezia, 34
00182 Roma - Italy
Phone: +39 06 68589134
info@linealightroma.com

Linea Light UK

Suite 109 - The Business Design Centre
52 Upper Street - Islington N10QH
London - UK
Phone: +44 0203 6371983
info@linealight-uk.com

Linea Light France

Z.A. Heiden Est, 12 rue des Pays-Bas
68310 Wittelsheim - France
Phone: +33 389 75 52 23
Fax: +33 389 75 59 07
info@linealight.fr

Linea Light Deutschland

Aktienstraße 214
45473 Mülheim Ruhr - Germany
Phone: +49 208 299979-0
Fax: +49 208 299979-10
service@linealight.de

Linea Light USA - Inter Lux

3741 Commerce Drive
Suites 306-308
Baltimore, MD 21227 - USA
Phone: +1 410 381 1497
Fax: +1 410 381 1589
answers@inter-lux.com

Linea Light Russia

Design Center Artplay
Nizhnyaya Syromyatnicheskaya 10/2 enter B,
3rd floor, office 14
105120 Moscow - Russia Federation
Phone: +7 495 639 9941
info@linealight.ru

Linea Light Spain

C/ Longares, 48
28022 Madrid - Spain
Phone: +34 912534773
info@linealight.es

Linea Light Singapore

21 Kaki Bukit Place, 5th Fl.
Eunos Techpark Singapore
416199 Singapore
Phone: +65-6908 5758
info.sg@linealight.com


Linea Light GCC

Jumeirah Lake Towers
JBC2 - 35th Floor Cluster V - Dubai - UAE
P.O. Box 125902
Phone: +971 4 4218275
Fax: +971 4 4218274
info@linealight.ae

Linea Light Asia - Pacific

No. 7, Nanyi Huayuan Road, Industry Avenue,
528478 Xiaolan Town, Zhongshan City,
Guangdong Province - China
Phone: +86 760 87618355
info@linealight.com.cn

linealight.com

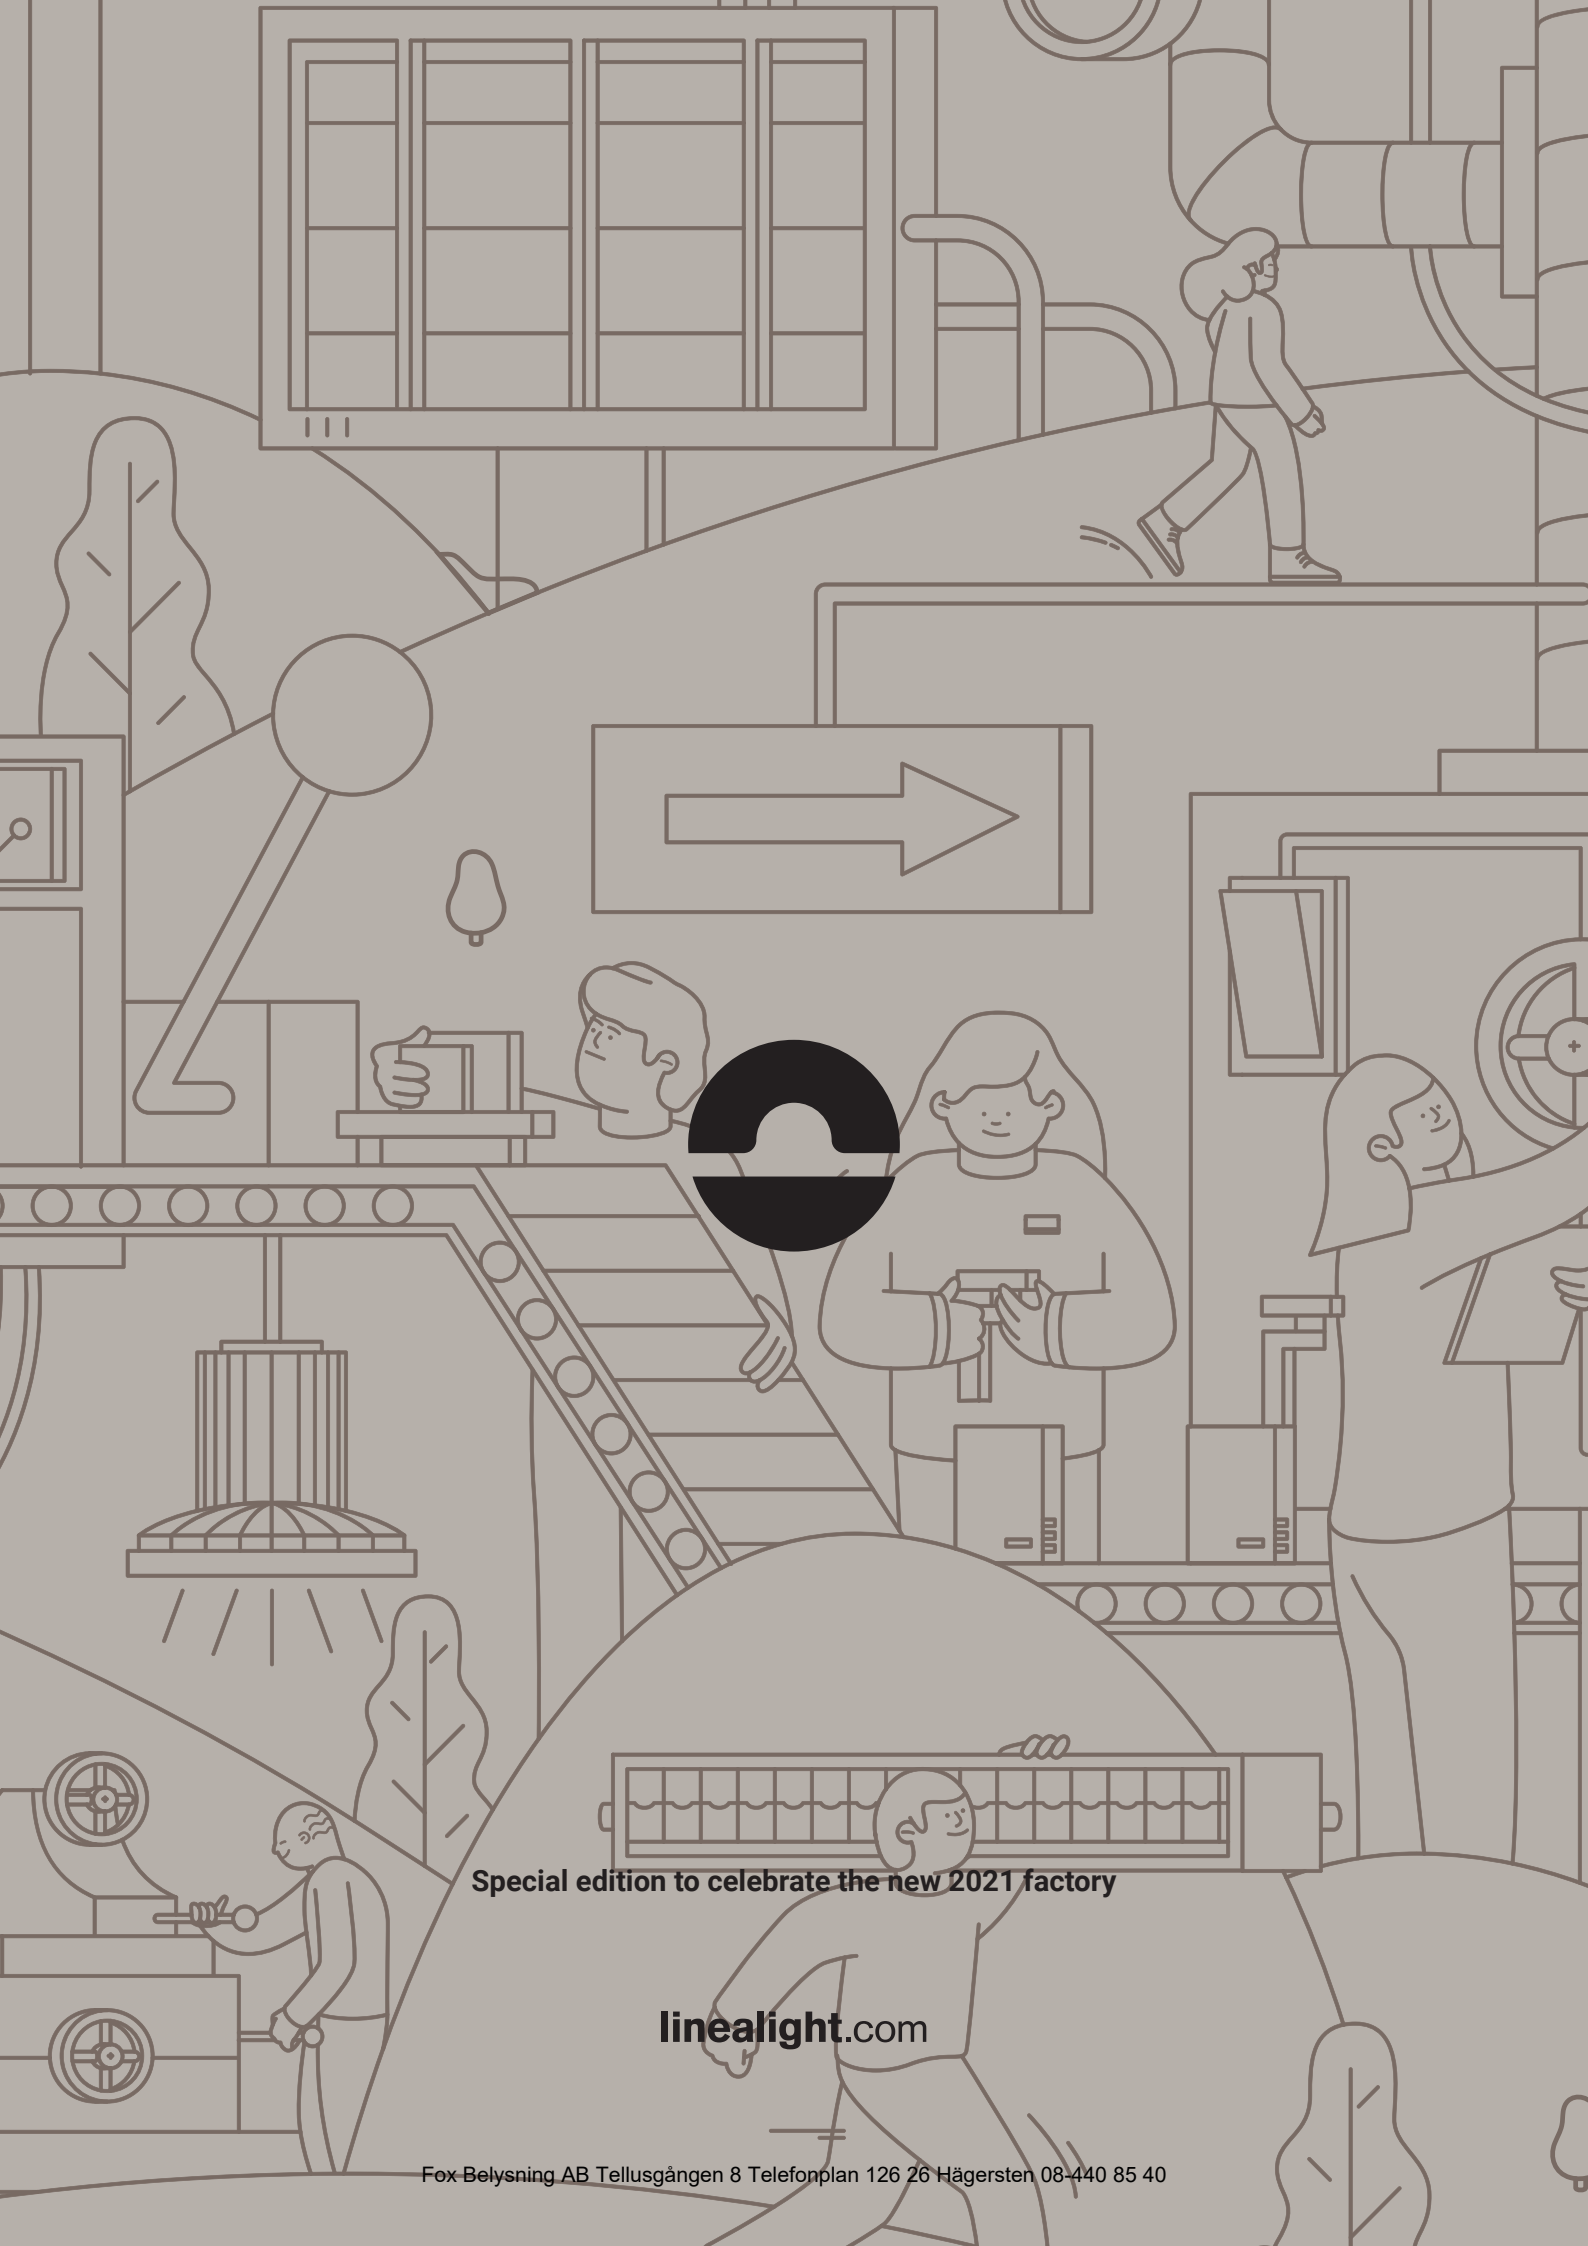

Special edition to celebrate the new 2021 factory

linealight.com