





**Xenia 2.0\_L RGBW DMX** | Linear profiles | 100-240V | topLED | 20 W/m

| 535mm - 11W | type         | colour             | optic              |
|-------------|--------------|--------------------|--------------------|
| Anod. Al.   | <b>94054</b> | RGBW natural white | <b>Q</b>           |
|             |              | RGBW warm white    | <b>V</b>           |
|             |              |                    | M. Flood <b>20</b> |
|             |              |                    | Flood <b>50</b>    |
|             |              |                    | W. Flood <b>90</b> |
|             |              |                    | Asym. <b>07</b>    |
|             |              |                    | General <b>00</b>  |

| 1182mm - 22W | type         | colour             | optic              |
|--------------|--------------|--------------------|--------------------|
| Anod. Al.    | <b>94057</b> | RGBW natural white | <b>Q</b>           |
|              |              | RGBW warm white    | <b>V</b>           |
|              |              |                    | M. Flood <b>20</b> |
|              |              |                    | Flood <b>50</b>    |
|              |              |                    | W. Flood <b>90</b> |
|              |              |                    | Asym. <b>07</b>    |
|              |              |                    | General <b>00</b>  |

**Suggested electronics**

**DMX controllers**  
DMX controllers  
▶ 214~216



**89564**  
DMX addresser  
▶ 216



**89365**  
DMX Line closure  
▶ 223

**Cables****Power cable - 190~250V AC - 24V DC**

|       |             |                         |              |
|-------|-------------|-------------------------|--------------|
| 1,5 m | F 4 pin M12 | 4 x 0,5 mm <sup>2</sup> | <b>99216</b> |
| 5 m   | F 4 pin M12 | 4 x 0,5 mm <sup>2</sup> | <b>89190</b> |

**Extension power cable - 190~250V AC - 24V DC**

|      |                 |                         |              |
|------|-----------------|-------------------------|--------------|
| 1 m  | M + F 4 pin M12 | 4 x 0,5 mm <sup>2</sup> | <b>98437</b> |
| 5 m  | M + F 4 pin M12 | 4 x 0,5 mm <sup>2</sup> | <b>98149</b> |
| 10 m | M + F 4 pin M12 | 4 x 0,5 mm <sup>2</sup> | <b>89188</b> |

**Signal cable**

|     |                           |                                   |              |
|-----|---------------------------|-----------------------------------|--------------|
| 5 m | M 5 pin M12               | 2 x 0,25 mm <sup>2</sup> + shield | <b>89189</b> |
| 5 m | M 5 pin M12 + M 3 pin XLR | 2 x 0,25 mm <sup>2</sup> + shield | <b>89186</b> |
| 5 m | M 5 pin M12 + F 3 pin XLR | 2 x 0,25 mm <sup>2</sup> + shield | <b>98494</b> |
| 5 m | M 5 pin M12 + M 3 pin XLR | 2 x 0,25 mm <sup>2</sup> + shield | <b>98493</b> |

**Extension signal cable**

|      |                 |                                   |              |
|------|-----------------|-----------------------------------|--------------|
| 10 m | M + F 5 pin M12 | 2 x 0,25 mm <sup>2</sup> + shield | <b>89187</b> |
| 5 m  | M + F 5 pin M12 | 2 x 0,25 mm <sup>2</sup> + shield | <b>98993</b> |
| 1 m  | M + F 5 pin M12 | 2 x 0,25 mm <sup>2</sup> + shield | <b>98994</b> |

**Accessories****Anti-Glare**

|                      |              |
|----------------------|--------------|
| For Xenia 2.0 535mm  | <b>98953</b> |
| For Xenia 2.0 1182mm | <b>98952</b> |
| More information ▶   | 82           |

**Adjustable brackets**


|                          |              |
|--------------------------|--------------|
| Lenght from 46mm to 67mm | <b>98949</b> |
| More information ▶       | 84           |

**Fixed steel brackets**

|                    |              |
|--------------------|--------------|
| Lenght 90mm        | <b>89045</b> |
| Lenght 150mm       | <b>89046</b> |
| Lenght 300mm       | <b>89047</b> |
| More information ▶ | 84           |







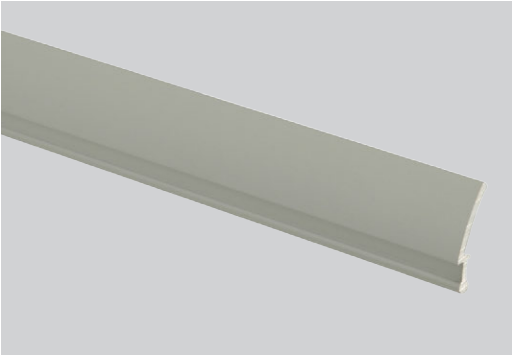

| type      | suitable for      |       |
|-----------|-------------------|-------|
| Anod. Al. | Xenia 2.0 366 mm  | 98782 |
| Anod. Al. | Xenia 2.0 500 mm  | 98951 |
| Anod. Al. | Xenia 2.0 535 mm  | 98953 |
| Anod. Al. | Xenia 2.0 630 mm  | 98783 |
| Anod. Al. | Xenia 2.0 930 mm  | 98784 |
| Anod. Al. | Xenia 2.0 1182 mm | 98952 |
| Anod. Al. | Xenia 2.0 1230 mm | 98785 |

Anti-glare



The **anti-glare** accessory greatly reduces the front glare of the LEDs. It is ideal in combination with the Asymmetric and Flood optics in wall lighting fixtures. This accessory can be easily installed by the customer even after the assembly of the LED lighting fixture (see Figures 1 and 2).

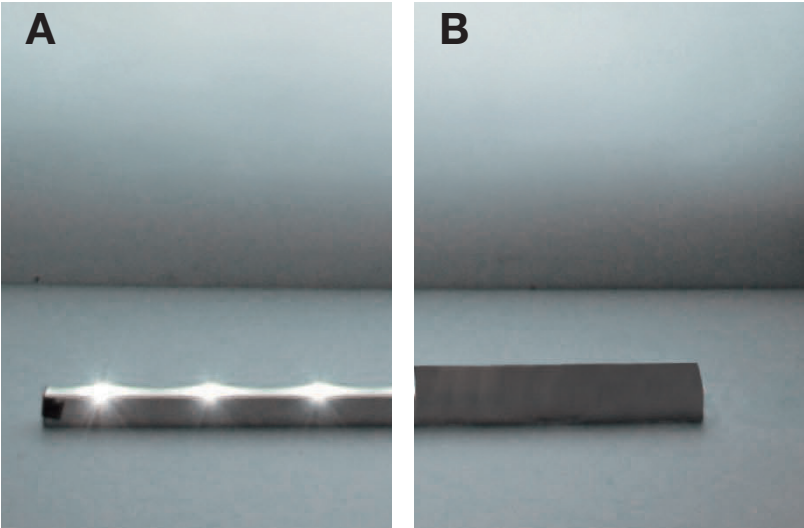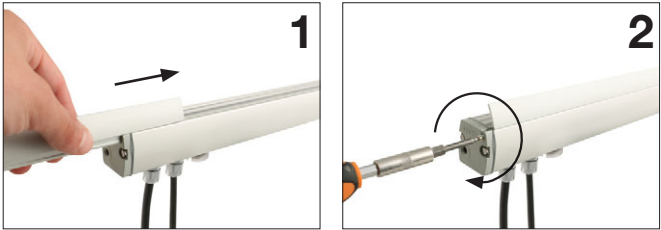



View of the bar with (fig. B) and without (fig. A) the anti-glare accessory.  
Note that the light emission is not reduced by eliminating the front glare of the LEDs.

### Adjustable fixing bracket

Stainless steel brackets can be adjusted with a high level of precision both in rotation and in height (46mm to 67mm) for an accurate orientation of the light beam.

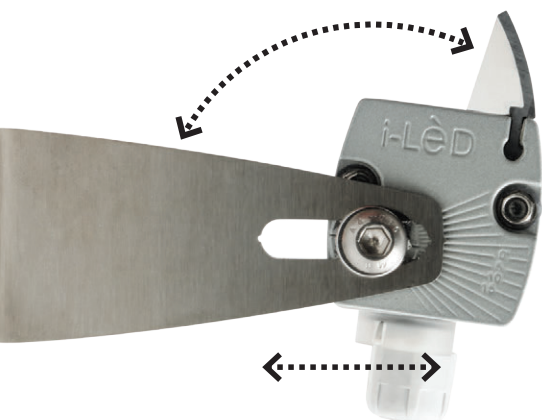


Steel **98949**

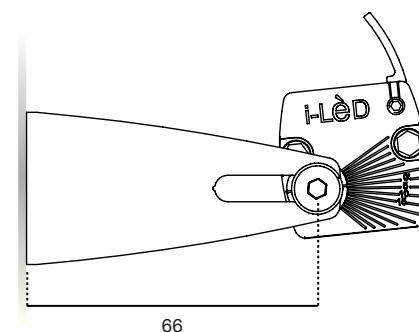


### Xenia | Fixing steel brackets

#### Fixing brackets



Brackets for fixing and rotating Xenia linear spotlights.  
Polished AISI 304.



Steel **89045**



Steel **89046**

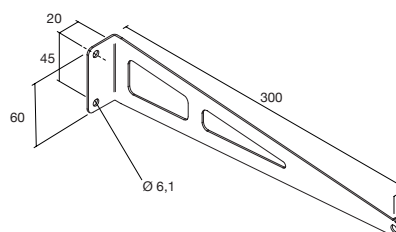

Steel **89047**