





Xenia 2.0_X | Linear profiles | powerLED | 20 W/m | 630mA**366mm - 6W****type****colour****optic**

Anod. AL	CRI 80	93690
----------	--------	-------

3 LEDs

3000 K	703 lm	W
4000 K	749 lm	N

M. Flood	20
Flood	50
W. Flood	90
Elliptic	25
Asym.	07


**99179**ON/OFF
1 - 2 art.**99186**ON/OFF
2 - 4 art.**630mm - 12W****type****colour****optic**

Anod. AL	CRI 80	93691
----------	--------	-------

6 LEDs

3000 K	1406 lm	W
4000 K	1498 lm	N

M. Flood	20
Flood	50
W. Flood	90
Elliptic	25
Asym.	07


**99179**ON/OFF
1 art.**99186**ON/OFF
1 - 2 art.**930mm - 18W****type****colour****optic**

Anod. AL	CRI 80	93755
----------	--------	-------

9 LEDs

3000 K	2109 lm	W
4000 K	2247 lm	N

M. Flood	20
Flood	50
W. Flood	90
Elliptic	25
Asym.	07

**99186**ON/OFF
1 art.**1230mm - 24W****type****colour****optic**

Anod. AL	CRI 80	93785
----------	--------	-------

12 LEDs

3000 K	2812 lm	W
4000 K	2996 lm	N

M. Flood	20
Flood	50
W. Flood	90
Elliptic	25
Asym.	07

**99186**ON/OFF
1 art.**Cables**1m Neoprene
cable 2 x 1 mm²

included

CUSTOMOn request the light profile is available with **DALI** or **1/10V** power supply**Accessories****Anti-Glare**

For Xenia 2.0 366mm	98782
For Xenia 2.0 630mm	98783
For Xenia 2.0 930mm	98784
For Xenia 2.0 1230mm	98785

More information 82

Adjustable brackets

Lenght from 46mm to 67mm	98949
--------------------------	--------------

More information 84

Fixed steel brackets


Lenght 90mm	89045
-------------	--------------

Lenght 150mm	89046
--------------	--------------

Lenght 300mm	89047
--------------	--------------

More information 84





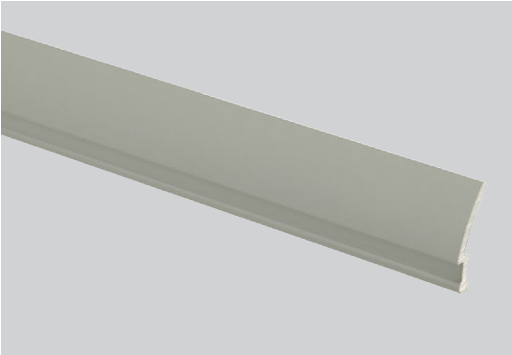

type	suitable for	
Anod. Al.	Xenia 2.0 366 mm	98782
Anod. Al.	Xenia 2.0 500 mm	98951
Anod. Al.	Xenia 2.0 535 mm	98953
Anod. Al.	Xenia 2.0 630 mm	98783
Anod. Al.	Xenia 2.0 930 mm	98784
Anod. Al.	Xenia 2.0 1182 mm	98952
Anod. Al.	Xenia 2.0 1230 mm	98785

Anti-glare



The **anti-glare** accessory greatly reduces the front glare of the LEDs. It is ideal in combination with the Asymmetric and Flood optics in wall lighting fixtures. This accessory can be easily installed by the customer even after the assembly of the LED lighting fixture (see Figures 1 and 2).

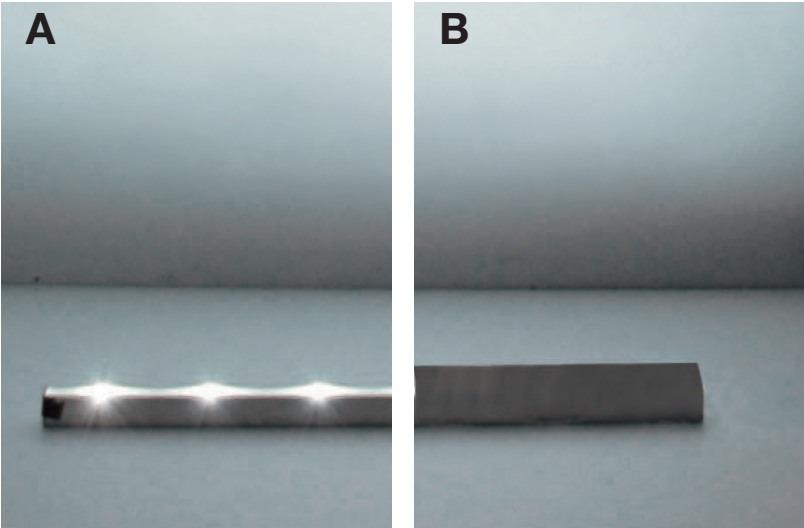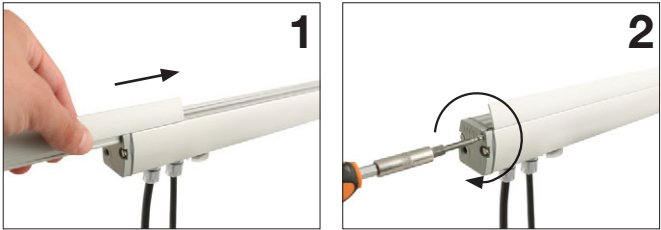



View of the bar with (fig. B) and without (fig. A) the anti-glare accessory.
Note that the light emission is not reduced by eliminating the front glare of the LEDs.

Adjustable fixing bracket

Stainless steel brackets can be adjusted with a high level of precision both in rotation and in height (46mm to 67mm) for an accurate orientation of the light beam.

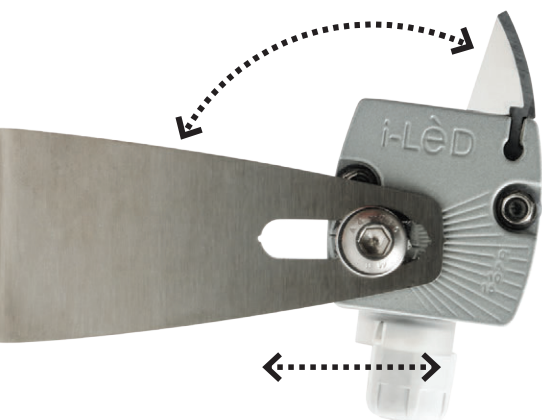


Steel **98949**

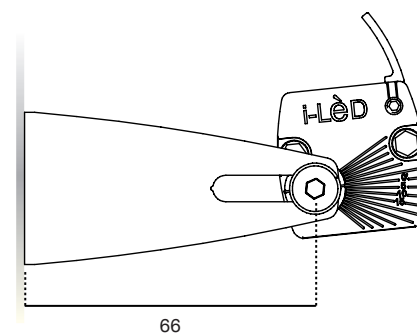


Xenia | Fixing steel brackets

Fixing brackets



Brackets for fixing and rotating Xenia linear spotlights. Polished AISI 304.



Steel **89045**



Steel **89046**

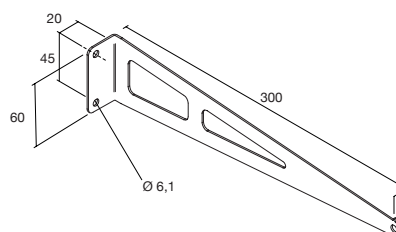

Steel **89047**