

Stiff



Available in the square recessed version or with plasterboard outer casing, Stiff has been **designed to illuminate indoor spaces like walls or perimeters** by means of continuous lines of light. Thanks to its wide range depth, it is possible to choose from among a wealth of LED sources and optics thus obtaining many different light effects. Available in the Wall Washer optics as well.

Passive heat dissipation

Anodised aluminium extruded casing


Light distribution

Five optics available for a number of light effects

Practical installation

Available in the recessed version or with outer casing for plasterboard



Stiff | Linear profiles | powerLED 4.5 W 500 mA**type**Anod. AL CRI 80 **88899****colour**

3000 K 534 lm **W**
 4000 K 570 lm **N**
 5000 K 648 lm **C**
 R - G - B - Y on request

optic

20° **20**
 50° **50**
 90° **90**
 Asym. **07**



89146
 ON/OFF
 1 art.




99115
 1-10V
 1 - 4 art.



99114
 DALI
 1 - 4 art.



Accessories
 204 - 205

Stiff WallWasher | Linear profiles | powerLED 4.5 W 500 mA**type**Anod. AL CRI 80 **89518****colour**

3000 K 534 lm **W**
 4000 K 570 lm **N**
 5000 K 648 lm **C**
 R - G - B - Y on request

opticWall W. **25**

89146
 ON/OFF
 1 art.




99115
 1-10V
 1 - 4 art.



99114
 DALI
 1 - 4 art.



Accessories
 204 - 205

Stiff | Linear profiles | powerLED 9 W 500 mA**type**Anod. AL **88636****colour**

3000 K 1068 lm **W**
 4000 K 1140 lm **N**
 5000 K 1296 lm **C**
 R - G - B - Y on request

optic

20° **20**
 50° **50**
 90° **90**
 Asym. **07**



99128
 ON/OFF
 1 art.





99115
 1-10V
 1 - 2 art.



99114
 DALI
 1 - 2 art.



Accessories
 204 - 205

Stiff WallWasher | Linear profiles | powerLED 9 W 500 mA**type**Anod. AL CRI 80 **89519****colour**

3000 K 1068 lm **W**
 4000 K 1140 lm **N**
 5000 K 1296 lm **C**
 R - G - B - Y on request

opticWall W. **25**

99128
 ON/OFF
 1 art.



99115
 1-10V
 1 - 2 art.



99114
 DALI
 1 - 2 art.



Accessories
 204 - 205

Stiff | Linear profiles | powerLED 15 W 500 mA



type

Anod. AL CRI 80 **88637**

colour

3000 K 1780 lm **W**
 4000 K 1900 lm **N**
 5000 K 2160 lm **C**
 R - G - B - Y on request

optic

20° **20**
 50° **50**
 90° **90**
 Asym. **07**



99106
 ON/OFF
 1 art.



99115
 1-10V
 1 art.




99114
 DALI
 1 art.



Accessories
 204 - 205

Stiff WallWasher | Linear profiles | powerLED 15 W 500 mA



type

Anod. AL CRI 80 **89520**

colour

3000 K 1780 lm **W**
 4000 K 1900 lm **N**
 5000 K 2160 lm **C**
 R - G - B - Y on request

optic

Wall W. **25**

99106
 ON/OFF
 1 art.



99115
 1-10V
 1 art.



99114
 DALI
 1 art.



Accessories
 204 - 205

Stiff | Linear profiles | powerLED 18 W 500 mA



type

Anod. AL CRI 80 **88638**

colour

3000 K 2136 lm **W**
 4000 K 2280 lm **N**
 5000 K 2592 lm **C**
 R - G - B - Y on request

optic

20° **20**
 50° **50**
 90° **90**
 Asym. **07**



99106
 ON/OFF
 1 art.



99115
 1-10V
 1 art.




99114
 DALI
 1 art.



Accessories
 204 - 205

Stiff WallWasher | Linear profiles | powerLED 18 W 500 mA



type

Anod. AL CRI 80 **89521**

colour

3000 K 2136 lm **W**
 4000 K 2280 lm **N**
 5000 K 2592 lm **C**
 R - G - B - Y on request

optic

Wall W. **25**

99106
 ON/OFF
 1 art.




99115
 1-10V
 1 art.



99114
 DALI
 1 art.



Accessories
 204 - 205

Stiff | Linear profiles | powerLED 30 W 500 mA**type**Anod. AL CRI 80 **88613****colour**

3000 K 3560 lm **W**
 4000 K 3800 lm **N**
 5000 K 4320 lm **C**
 R - G - B - Y on request

optic

20° **20**
 50° **50**
 90° **90**
 Asym. **07**



2 x 99106
 ON/OFF
 1 art.





2 x 99115
 1-10V
 1 art.



2 x 99114
 DALI
 1 art.



Accessories
 ▢ 204 - 205

Stiff WallWasher | Linear profiles | powerLED 30 W 500 mA**type**Anod. AL CRI 80 **89522****colour**

3000 K 3560 lm **W**
 4000 K 3800 lm **N**
 5000 K 4320 lm **C**
 R - G - B - Y on request

opticWall W. **25**

2 x 99106
 ON/OFF
 1 art.



2 x 99115
 1-10V
 1 art.




2 x 99114
 DALI
 1 art.



Accessories
 ▢ 204 - 205




Stiff RGB | Linear profiles | powerLED 9 W 500 mA



type	colour	optic
Anod. AL	88639	RGB
		Z
		20° 20
		50° 50
		90° 90
		Asym. 07

99140	99206	99202	Accessories
N/O & IR	DMX	DMX	204 - 205


Stiff WallWasher RGB | Linear profiles | powerLED 9 W 500 mA



type	colour	optic
Anod. AL	89523	RGB
		Z
		Wall W. 25

99140	99206	99202	Accessories
N/O & IR	DMX	DMX	204 - 205


Stiff RGB | Linear profiles | powerLED 18 W 500 mA



type	colour	optic
Anod. AL	88640	RGB
		Z
		20° 20
		50° 50
		90° 90
		Asym. 07


99140	99206	99202	Accessories
N/O & IR	DMX	DMX	204 - 205

Stiff WallWasher RGB | Linear profiles | powerLED 18 W 500 mA



type	colour	optic
Anod. AL	89524	RGB
		Z
		Wall W. 25

99140	99206	99202	Accessories
N/O & IR	DMX	DMX	204 - 205

Stiff RGB | Linear profiles | powerLED 27 W 500 mA

type	colour	optic
Anod. AL	88641	RGB
		Z
		20°
		50°
		90°
		Asym.
		20
		50
		90
		07



99140
N/O & IR





99206
DMX



99202
DMX



Accessories
204 - 205

Stiff WallWasher RGB | Linear profiles | powerLED 27 W 500 mA

type	colour	optic
Anod. AL	89525	RGB
		Z
		Wall W.
		25



99140
N/O & IR





99206
DMX



99202
DMX



Accessories
204 - 205

Stiff RGB | Linear profiles | powerLED 32 W 500 mA

type	colour	optic
Anod. AL	88642	RGB
		Z
		20°
		50°
		90°
		Asym.
		20
		50
		90
		07




99140
N/O & IR



99202
DMX



Accessories
204 - 205

Stiff WallWasher RGB | Linear profiles | powerLED 32 W 500 mA

type	colour	optic
Anod. AL	89526	RGB
		Z
		Wall W.
		25




99140
N/O & IR



99202
DMX





Accessories
204 - 205

Stiff RGB | Linear profiles | powerLED 54 W 500 mA**type**Anod. AL **88614****colour**


RGB

optic

20°	20
50°	50
90°	90
Asym.	07

**99140**
N/O & IR**99202**
DMXAccessories
204 - 205**Stiff** WallWasher RGB | Linear profiles | powerLED 54 W 500 mA**type**Anod. AL **89527****colour**



RGB

opticWall W. **25****99140**
N/O & IR**99202**
DMXAccessories
204 - 205**Stiff** Hi-Flux | Linear profiles | topLED 3.6 W 24 V**type**Anod. AL CRI 80 **97679****colour**

2700 K	253 lm	M
3000 K	263 lm	W
4000 K	287 lm	N

optic

Asym.	07
Diff.	00

**89408**
ON/OFF
1 art.**89487**
ON/OFF
1 - 4 art.**99332**
1-10V
1 - 41 art.Accessories
204 - 205**Stiff** Hi-Flux | Linear profiles | topLED 7.2 W 24 V**type**Anod. AL CRI 80 **97680****colour**


2700 K	505 lm	M
3000 K	526 lm	W
4000 K	574 lm	N

optic

Asym.	07
Diff.	00

**89487**
ON/OFF
1 - 2 art.**84829**
ON/OFF
1 - 3 art.**99332**
1-10V
1 - 20 art.Accessories
204 - 205

Stiff Hi-Flux | Linear profiles | topLED 12 W 24 V



type

Anod. AL CRI 80 **97681**

colour

2700 K	841 lm	M
3000 K	877 lm	W
4000 K	956 lm	N

optic

Asym.	07
Diff.	00




89487
ON/OFF
1 art.

84829
ON/OFF
1 - 2 art.

99332
1-10V
1 - 12 art.

 Accessories
204 - 205

Stiff Hi-Flux | Linear profiles | topLED 15 W 24 V



type

Anod. AL CRI 80 **97682**

colour

2700 K	1009 lm	M
3000 K	1052 lm	W
4000 K	1148 lm	N

optic

Asym.	07
Diff.	00



89487
ON/OFF
1 art.

84829
ON/OFF
1 art.

99332
1-10V
1 - 10 art.

 Accessories
204 - 205

Stiff Hi-Flux | Linear profiles | topLED 24 W 24 V



type

Anod. AL CRI 80 **97683**

colour

2700 K	1681 lm	M
3000 K	1753 lm	W
4000 K	1912 lm	N

optic

Asym.	07
Diff.	00



84829
ON/OFF
1 art.

99331
ON/OFF
1 - 6 art.


99332
1-10V
1 - 6 art.

 Accessories
204 - 205

Stiff | Wall outer-casings



outer-casing		
Anod. AL	1000 mm	89050
Anod. AL	2000 mm	89052
Anod. AL	3000 mm	89048



cap	
Anod. AL	89360



Extruded anodised aluminium profile that allows you to create a continuous line of Stiff bars for ease of cable positioning. Cut according to need.



fixing kit	L. mm	quantity
Anod. AL	300 - 600	2 x 89043
	1000 - 1200	3 x
	2000	4 x


Kit comprising a bush (3 items), L-shaped (3 items) and click bracket (3 items) allowing you to fix the aluminium outer casing in different position.

Stiff | Perimetral outer-casings




L.	outer-casing	diffuser	anti-glaring
1000 mm	Anod. AL 89060	Transp. 89075	Anod. AL 89579
2000 mm	Anod. AL 89062	Transp. 89079	Anod. AL 89247
3000 mm	Anod. AL 89058	Transp. 89071	Anod. AL 89580

Especially created to light the perimeter of a room. Extruded anodised aluminium profile that allows you to create a continuous line of Stiff bars for ease of cable positioning. Cut according to need. Optional anti-glare polycarbonate diffuser.

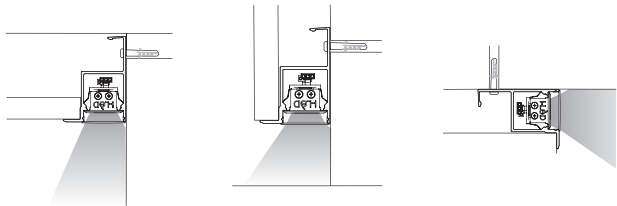


Stiff | False-ceiling outer-casings



outer-casing


Anod. Al.	320 mm	98125
Anod. Al.	620 mm	98126
Anod. Al.	1020 mm	98127
Anod. Al.	1220 mm	98128
Anod. Al.	2020 mm	98129




diffuser

Transp.	1000 mm	89075
Transp.	2000 mm	89079
Transp.	3000 mm	89071

Designed specifically to create lines of light on the ceiling. Extruded anodised aluminium profile that allows you to create a continuous line of Stiff bars for ease of cable positioning.
Cut according to need. Optional anti-glare polycarbonate diffuser.

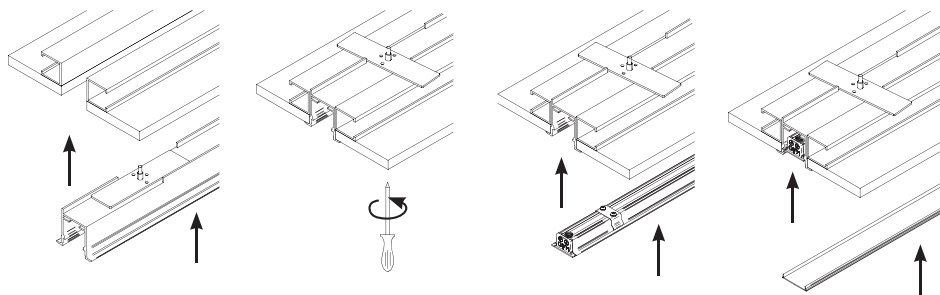

Stiff | Springs



outer-casing

Anod. Al.	89041
-----------	--------------



cap

Anod. Al.	89042
-----------	--------------

Prestressed steel self-retaining clips for the installation of the Stiff bar into plasterboard, previously prepared and cut (25mm section). Pack contains two self-retaining clips.

Accessory to be used with self-retaining clips for safety of installations on plasterboard. Pack contains two 2-metre-long steel cables and accessories. **WARNING:** Do not use for suspensions.

