

MY WHITE



IT

– Corpo diffondente in polietilene lineare bianco. Nelle versioni MiniWhite_Cover e Bond coperture in polycarbonato. Supporti palo in Bayblend® (miscela PC-ABS).

EN

– White linear polyethylene casing for diffused lighting; in the MiniWhite_Cover and Bond versions the mounting frame is in polycarbonate; Bayblend® (PC-ABS mixture) pole supports.

ES

– Cuerpo de difusión de polietileno lineal blanco; en las versiones MiniWhite_Cover and Bond) la cobertura es en polycarbonato; Soporte para poste en Bayblend® (mezcla PC-ABS)

DE

– Leuchtkörper aus durchscheinendem, weißem, Polyethylen. In der Version MiniWhite_Cover und Bond ist der Überzug aus PC. Der Fuß ist aus Bayblend® (PC-ABS Mischung)

FR

– Corps diffusant en polyéthylène linéaire blanc. Dans les versions MiniWhite_Cover et Bond couvertures en polycarbonate. Supports poteau en BayBlend® (mélange PC-ABS).

PY

– Рассеивающий корпус из линейного белого полиэтилена; Поликарбонат у версиях MiniWhite_Cover и Bond Крепление для Bayblend® (смесь поликарбоната и АБС).



















MYWHITE_U

topLED 11 W | 220-240 V | CRI 85

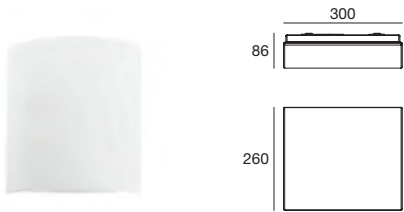

TYPE	CODE	COLOUR
☐ WHITE	7889	3000 K 1246 lm


topLED 17 W | 220-240 V | CRI 85

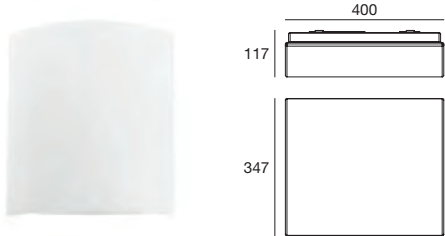

TYPE	CODE	COLOUR
☐ WHITE	7890	3000 K 1800 lm

MYWHITE FULL LIGHT_Q


topLED 27 W | 220-240 V | CRI 90

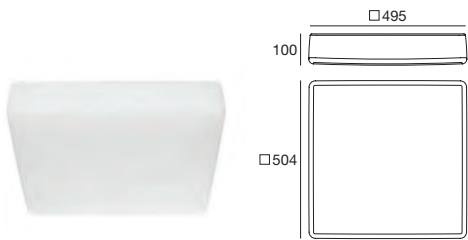

TYPE	CODE	COLOUR
☐ WHITE	8162	3000 K 3117 lm
☐ WHITE	8162N	4000 K 3432 lm

MYWHITE FULL LIGHT_R


topLED 27 W | 220-240 V | CRI 90

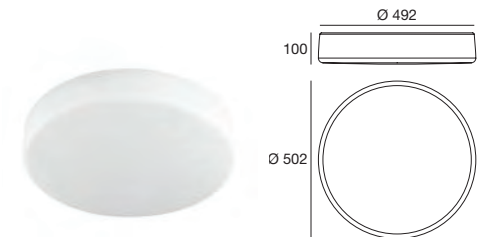

TYPE	CODE	COLOUR
☐ WHITE	8160	3000 K 3117 lm
☐ WHITE	8160N	4000 K 3432 lm

MYWHITE_O


topLED 8 W | 220-240 V | CRI 85



TYPE	CODE	COLOUR
☐ WHITE	8027	3000 K 970 lm
☐ WHITE	8027N	4000 K 1108 lm


MYWHITE_R

topLED 10 W | 220-240 V | CRI 85



TYPE	CODE	COLOUR
☐ WHITE	7805	3000 K 1340 lm
☐ WHITE	7805N	4000 K 1530 lm


topLED 16 W | 220-240 V | CRI 85



TYPE	CODE	COLOUR
☐ WHITE	7806	3000 K 1662 lm
☐ WHITE	7806N	4000 K 1898 lm

MYWHITE_R SENSOR


topLED 16 W | 220-240 V | CRI 85

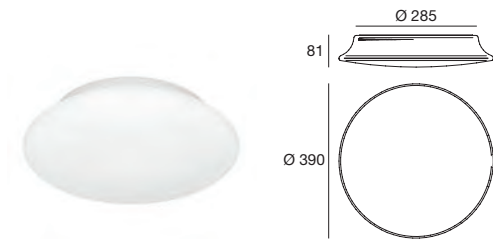

TYPE	CODE	COLOUR
☐ WHITE	7806S	3000 K 1662 lm
☐ WHITE	7806NS	4000 K 1898 lm
	TIME	3 min.
	SENSITIVITY RANGE	Ø 5 m - H 2,7 m

MYWHITE_REMERGENCY

topLED 16 W | 220-240 V | CRI 85

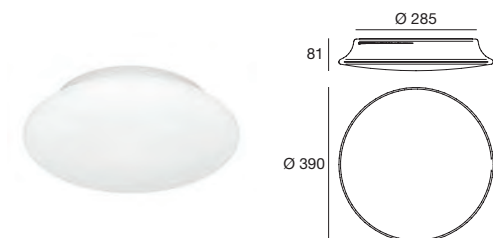


TYPE	CODE	COLOUR
☐ WHITE	7806E	3000 K 1662 lm
☐ WHITE	7806NE	4000 K 1898 lm
	EM AUTONOMY	3 hours
	EM BRIGHTNESS	14%

MYWHITE_Q

topLED 10 W | 220-240 V | CRI 85



TYPE	CODE	COLOUR
☐ WHITE	7807	3000 K 1340 lm
☐ WHITE	7807N	4000 K 1530 lm

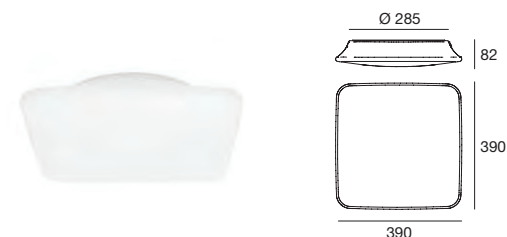


topLED 16 W | 220-240 V | CRI 85



TYPE	CODE	COLOUR
☐ WHITE	7808	3000 K 1662 lm
☐ WHITE	7808N	4000 K 1898 lm

MYWHITE_Q SENSOR


topLED 16 W | 220-240 V | CRI 85

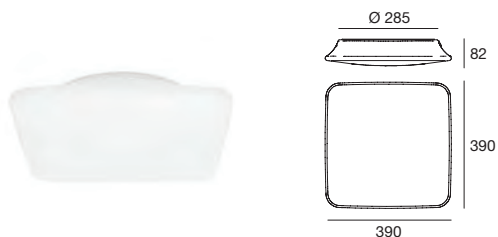

TYPE	CODE	COLOUR
☐ WHITE	7808S	3000 K 1662 lm
☐ WHITE	7808NS	4000 K 1898 lm
	TIME	3 min.
	SENSITIVITY RANGE	Ø 5 m - H 2,7 m

MYWHITE_Q EMERGENCY


topLED 16 W | 220-240 V | CRI 85

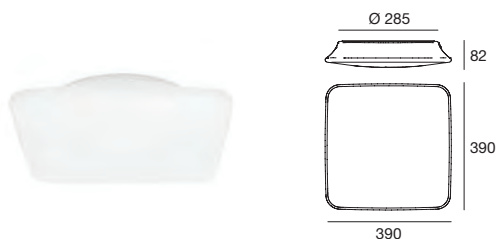

TYPE	CODE	COLOUR
☐ WHITE	7808E	3000 K 1662 lm
☐ WHITE	7808NE	4000 K 1898 lm
	EM AUTONOMY	3 hours
	EM BRIGHTNESS	14%


MYWHITE_B

topLED 11 W | 220-240 V | CRI 85

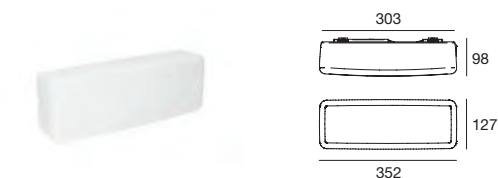

TYPE	CODE	COLOUR
☐ WHITE	7809	3000 K 1108 lm
☐ WHITE	7809N	4000 K 1265 lm

topLED 17 W | 220-240 V | CRI 85


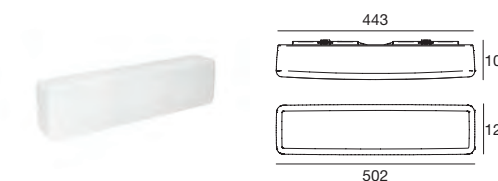


TYPE	CODE	COLOUR
☐ WHITE	7810	3000 K 1801 lm
☐ WHITE	7810N	4000 K 2057 lm

MYWHITE_B SENSOR

topLED 17 W | 220-240 V | CRI 85



TYPE	CODE	COLOUR
☐ WHITE	7810S	3000 K 1801 lm
☐ WHITE	7810NS	4000 K 2057 lm



TIME

3 min.



SENSITIVITY RANGE

Ø 5 m - H 2,7 m









MYWHITE_B EMERGENCY

topLED 17 W | 220-240 V | CRI 85



TYPE	CODE	COLOUR
☐ WHITE	7810E	3000 K 1801 lm
☐ WHITE	7810NE	4000 K 2057 lm



EM AUTONOMY

3 hours



EM BRIGHTNESS

7%








MINIWHITE_Q

topLED 4 W | 220-240 V | CRI 85






TYPE	CODE	COLOUR
☐ WHITE	8029	3000 K 400 lm
☐ WHITE	8029N	4000 K 462 lm







MINIWHITE_R

topLED 4 W | 220-240 V | CRI 85




TYPE	CODE	COLOUR
☐ WHITE	8028	3000 K 400 lm
☐ WHITE	8028N	4000 K 462 lm






MINIWHITECOVER_Q

topLED 4 W | 220-240 V | CRI 80



TYPE

- ☐ WHITE
- ☒ BLACK

CODE



8031
8033

COLOUR

3000 K
405 lm

MINIWHITE COVER_ Q DOUBLE

topLED 4 W | 220-240 V | CRI 80



TYPE

- ☐ WHITE
- ☒ BLACK

CODE


8032
8034

COLOUR

3000 K
405 lm

MINIWHITECOVER_R

topLED 4 W | 220-240 V | CRI 80



TYPE

- ☐ WHITE
- ☒ BLACK

CODE

8030
8026

COLOUR

3000 K
405 lm

MYWHITE BOND_ HEAD (RELAMPING FOR Ø 60 POLES)

topLED 12 W | 220-240 V | CRI 80



TYPE

- ☒ BLACK

CODE

8660

COLOUR


3000 K
1350 lm

ACCESSORIES

KIT0083 | IP68 kit


MYWHITE BOND

topLED 12 W | 220-240 V | CRI 80




TYPE	CODE	COLOUR
BLACK	8663	3000 K 1350 lm
KIT IP68 included		

topLED 12 W | 220-240 V | CRI 80



TYPE	CODE	COLOUR
BLACK	8666	3000 K 1350 lm
KIT IP68 included		

topLED 12 W | 220-240 V | CRI 80



TYPE	CODE	COLOUR
BLACK	8669	3000 K 1350 lm
KIT IP68 included		

MYWHITE BOND_W

topLED 12 W | 220-240 V | CRI 80



TYPE	CODE	COLOUR
BLACK	8672	3000 K 1350 lm
KIT IP68 included		