




Table Lamps | 220-240 V | topLED 9 W 325 mA  
CRI 90  
7113

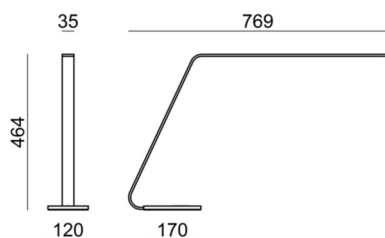

Technical data	
Type	Table Lamps
Installation position	Floor
Installation environment	Indoor
Light Source	LED
Circuit structure	topLED
Optics	General Lighting
Light emission direction	downward
Power	9 W
Source lumens	624 lm
Frequency	50 - 60 Hz
CCT / Tone	3000 K
Colour rendering index	90 Ra
AC / DC	AC
Safety class	2
IP	IP20
Optical compartment IP	IP40
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Fire Rated (BS 476 PT21 compliant)	No
Driver included	Driver
Dimmable article	Touch
Induction	No
Emergency mode	No
Motion sensor	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	1.60 m
Electric socket	Type C
Resin potting	No
Type of light emission	Single emission
Net weight	2.05 Kg

Finishing casing	
Material	Aluminium
Colour	black RAL 9005
Processing	Coating
Finishing diffuser	
Material	PC
Colour	opaline



## Table Lamps | 220-240 V | topLED 9 W 325 mA | CRI 90 7113

Single emission table lamps for indoor application. The warm white LED light source with a general lighting light distribution is composed of 35 topLED LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 624 lm, with a 69.3 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a black ral 9005 finish, processed by means of coating; the diffuser is made of PC. The ingress protection degree is IP20; the total weight is of 2.05 kg.

The total absorbed power is 9 W. The power supply cable is included and features.


The device features protection class II and can be floor-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Illuminotechnical Features	
Light Output Ratio (LOR)	59 %
Source lumens	624 lm
Delivered lumens	372.5 lm
Consumption	9 W
Luminaire efficacy	41 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra
Junction temperature (lighting fixture)	80 °C
Standard Operating Ambient Temperature	25 °C
LED Life / Failure Ratio	
L80 B20 C0 80000h	

UGR	
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20
UGR transversal	< 22
UGR axial	< 16

OPTICAL	
Light distribution simmetry	Symmetrical 2
C0/C180 optics	114°
C90/C270 optics	111°

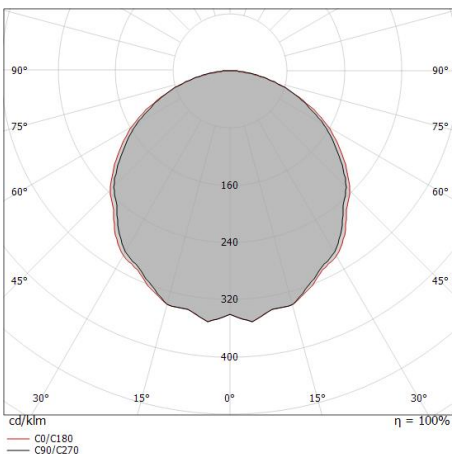

Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	1.44 1.53	E(0°) 508 E(C90) 48 E(C0) 43
1.0	2.89 3.06	E(0°) 127 E(C90) 12 E(C0) 11
1.5	4.33 4.58	E(0°) 56 E(C90) 5 E(C0) 5
2.0	5.78 6.11	E(0°) 32 E(C90) 3 E(C0) 3
2.5	7.22 7.64	E(0°) 20 E(C90) 2 E(C0) 2
3.0	8.67 9.17	E(0°) 14 E(C90) 1 E(C0) 1

Distance [m]      Cone diameter [m]      Illuminance [lx]

— C0/C180 (Half-peak divergence: 113.6°)  
— C90/C270 (Half-peak divergence: 110.6°)