


thin66


Materials

Anodised aluminium body

Opalescent silicone resin coating

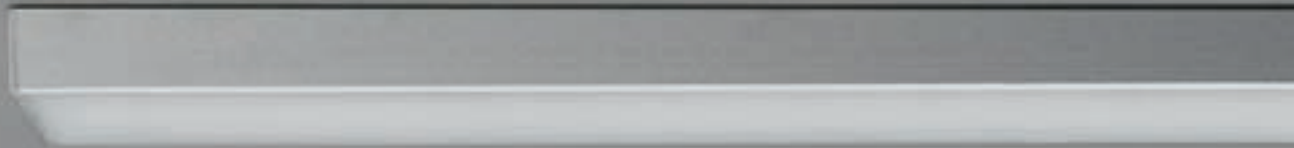


thin66 range

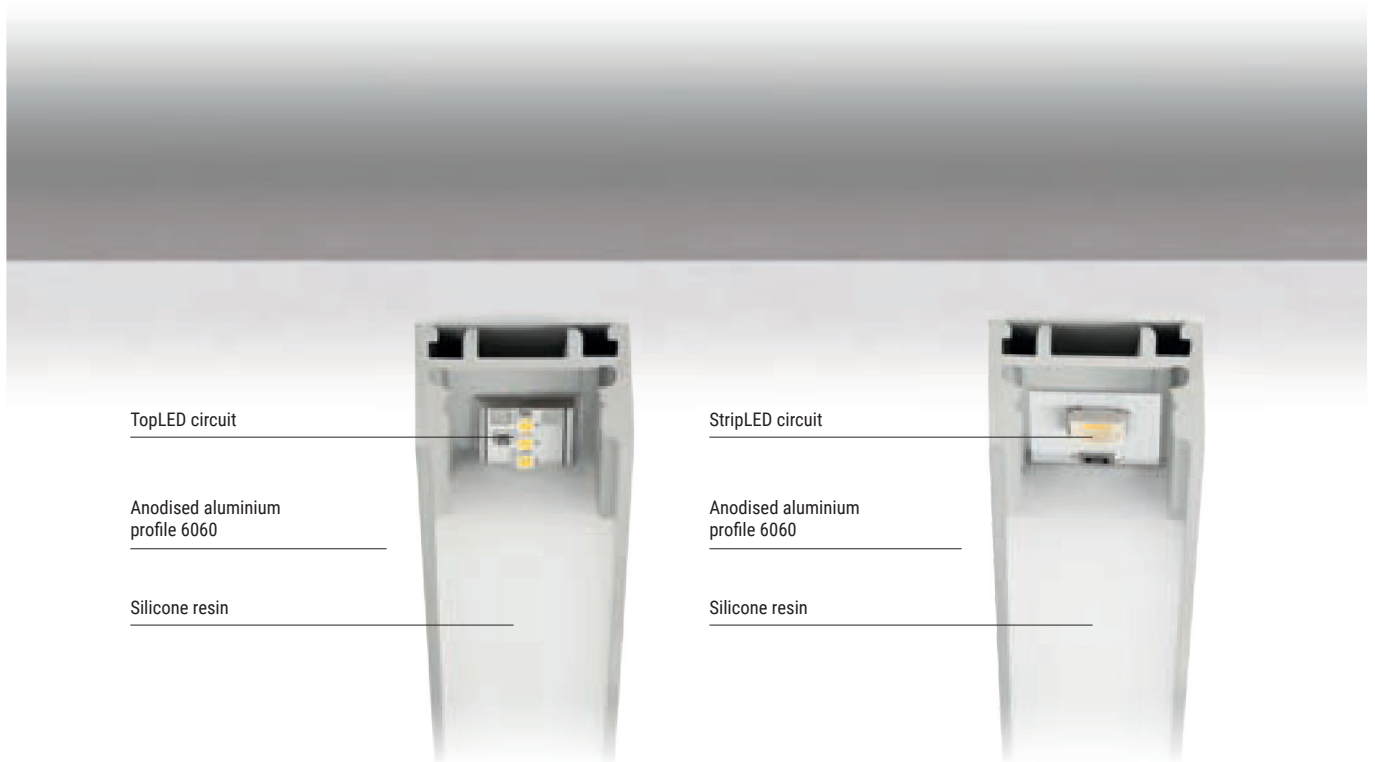


	Thin66	Thin66_RGBW
4,8 W	539 x 18 mm	-
9,6 W	1039 x 18 mm	539 x 18 mm
14,4 W	1539 x 18 mm	-
19,2 W	2039 x 18 mm	1039 x 18 mm
28,8 W	-	1539 x 18 mm
38,4 W	-	2039 x 18 mm
Finish	Anod. Al.	Anod. Al.
topLED	2700K - 3000K - 4000K	RGBW
Optics	General	General
Driver	On/Off 0/1-10V DALI	DMX

Thin66 | Linear profiles | 24V DC | topLED



4,8 W DC	Cct	lm S - D	Optic
Anod. AL. 83885	M 2700	425 - On req	00 General


4,8 W DC	W 3000	440 - On req	
Anod. AL. 83889	N 4000	480 - On req	

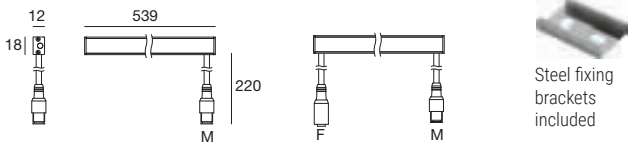

89179	89359	99331	99332	99722
ON/OFF 1-4 art. p 92 x l 117 x h 38	ON/OFF 1-8 art. p 115 x l 140 x h 50	ON/OFF 1-25 art. p 150 x l 60 x h 35	0/1-10V 1-25 art. p 150 x l 60 x h 35	DALI 1-20 art. p 191 x l 63 x h 38

9,6 W DC	Cct	lm S - D	Optic
Anod. AL. 83886	M 2700	850 - On req	00 General


9,6 W DC	W 3000	880 - On req	
Anod. AL. 83890	N 4000	960 - On req	

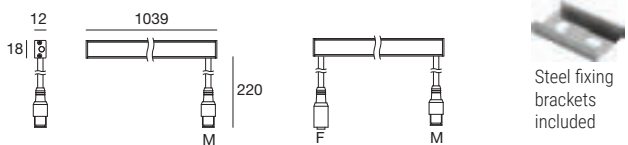

89179	89359	99331	99332	99722
ON/OFF 1-2 art. p 92 x l 117 x h 38	ON/OFF 1-4 art. p 115 x l 140 x h 50	ON/OFF 1-12 art. p 150 x l 60 x h 35	0/1-10V 1-12 art. p 150 x l 60 x h 35	DALI 1-10 art. p 191 x l 63 x h 38

14,4 W DC	Cct	lm S - D	Optic
Anod. AL. 83887	M 2700	1275 - On req	00 General


14,4 W DC	W 3000	1320 - On req	
Anod. AL. 83891	N 4000	1440 - On req	

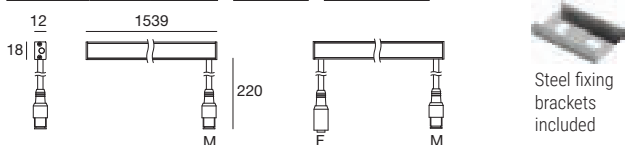

89179	89359	99331	99332	99722
ON/OFF 1 art. p 92 x l 117 x h 38	ON/OFF 1-2 art. p 115 x l 140 x h 50	ON/OFF 1-7 art. p 150 x l 60 x h 35	0/1-10V 1-6 art. p 150 x l 60 x h 35	DALI 1-6 art. p 191 x l 63 x h 38

19,2 W DC	Cct	lm S - D	Optic
Anod. AL. 83888	M 2700	1700 - On req	00 General



19,2 W DC	W 3000	1760 - On req	
Anod. AL. 83892	N 4000	1920 - On req	

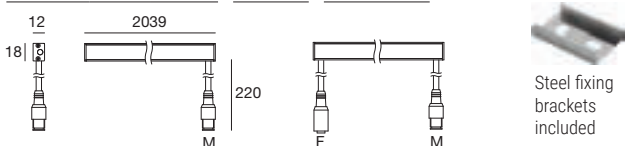

89179	89359	99331	99332	99722
ON/OFF 1 art. p 92 x l 117 x h 38	ON/OFF 1-2 art. p 115 x l 140 x h 50	ON/OFF 1-6 art. p 150 x l 60 x h 35	0/1-10V 1-6 art. p 150 x l 60 x h 35	DALI 1-5 art. p 191 x l 63 x h 38


Cables Pag. 761

Thin66 RGBW | Linear profiles | 24V DC | topLED



9,6 W DC	Optic
Anod. AL. 84060	V RGBW warm white 00 General -


9,6 W DC	
Anod. AL. 84064	

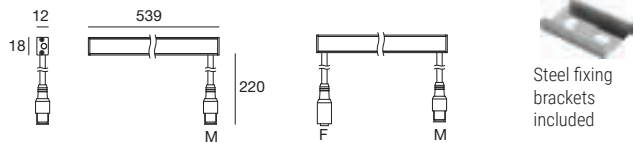

Driver	Switching	DMX	99385	89365
ON/OFF 24V DC 14W - 150W Pag. 940 - 941	24V DC Switching 50W - 750W Pag. 932	DMX Controllers Pag. 952 - 953	DMX/RDM addresser	120 Ohm DMX line closure

19,2 W DC	Optic
Anod. AL. 84061	V RGBW warm white 00 General -


19,2 W DC	
Anod. AL. 84065	

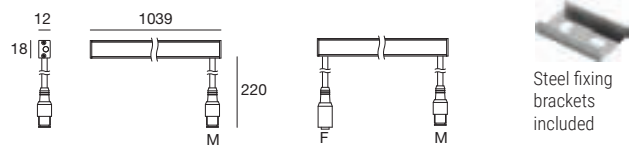

Driver	Switching	DMX	99385	89365
ON/OFF 24V DC 14W - 150W Pag. 940 - 941	24V DC Switching 50W - 750W Pag. 932	DMX Controllers Pag. 952 - 953	DMX/RDM addresser	120 Ohm DMX line closure

28,8 W DC	Optic
Anod. AL. 84062	V RGBW warm white 00 General -


28,8 W DC	
Anod. AL. 84066	

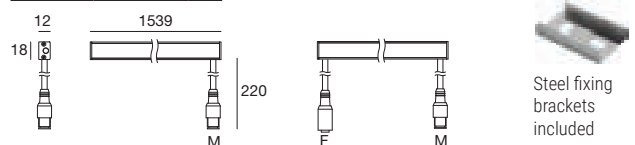

Driver	Switching	DMX	99385	89365
ON/OFF 24V DC 14W - 150W Pag. 940 - 941	24V DC Switching 50W - 750W Pag. 932	DMX Controllers Pag. 952 - 953	DMX/RDM addresser	120 Ohm DMX line closure

38,4 W DC	Optic
Anod. AL. 84063	V RGBW warm white 00 General -

38,4 W DC	
Anod. AL. 84067	

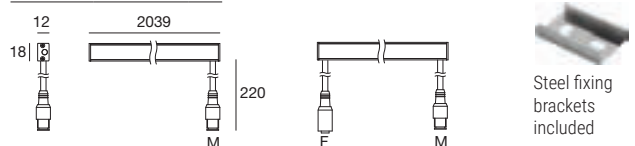

Driver	Switching	DMX	99385	89365
ON/OFF 24V DC 14W - 150W Pag. 940 - 941	24V DC Switching 50W - 750W Pag. 932	DMX Controllers Pag. 952 - 953	DMX/RDM addresser	120 Ohm DMX line closure

Cables Pag. 761

Cables



24V DC 190-250V AC

99216	Conn. F.4 pin M12 (L 1,5m)
89190	Conn. F.4 pin M12 (L 5m)

suitable for: Thin66



1-10V & DALI

89362	Conn F. 5 pin M12 (L 5m)
--------------	--------------------------

suitable for: Thin66 RGBW

Extension cables



24V DC 190-250V AC

98437	Conn M. + F. 4 pin M12 (L 1m)
98149	Conn M. + F. 4 pin M12 (L 5m)
89188	Conn M. + F. 4 pin M12 (L 10m)

suitable for: Thin66



1-10V & DALI

89361	Conn M. + F. 5 pin M12 (L 10m)
--------------	--------------------------------

suitable for: Thin66 RGBW

GV11 | Dubai, UAE

